US007159271B2

(12) **United States Patent**
Sepke et al.

(10) **Patent No.: US 7,159,271 B2**
(45) **Date of Patent: Jan. 9, 2007**

(54) **WET EXTRACTOR CLEANING DEVICE FLUID TANK ARRANGEMENT**

(75) Inventors: **Arnie Sepke**, Hudson, IL (US); **Randall Sandlin**, Bloomington, IL (US); **Vince Bobrosky**, Normal, IL (US); **Bill Reimer**, Normal, IL (US)

(73) Assignee: **Electrolux Home Care Products Ltd.**, Cleveland, OH (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 62 days.

(21) Appl. No.: **10/952,061**

(22) Filed: **Sep. 29, 2004**

(65) **Prior Publication Data**

US 2005/0091783 A1 May 5, 2005

Related U.S. Application Data

(60) Provisional application No. 60/506,180, filed on Sep. 29, 2003, provisional application No. 60/528,187, filed on Dec. 10, 2003.

(51) **Int. Cl.**
A47L 11/30 (2006.01)

(52) **U.S. Cl.** **15/320**; 15/410

(58) **Field of Classification Search** 15/320, 15/321, 331, 410
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,268,962	A	6/1918	Gray
1,982,345	A	11/1934	Kirby
2,109,621	A	3/1938	Kirby
2,178,003	A	10/1939	Smellie
2,416,417	A	2/1947	Taylor
2,524,928	A	10/1950	Platz
2,954,576	A	10/1960	Helm
3,203,707	A	8/1965	Anderson
3,204,272	A	9/1965	Greene et al.
3,316,579	A	5/1967	Smith
3,357,716	A	12/1967	Musichuk
3,485,017	A	12/1969	Duran et al.
3,527,469	A	9/1970	Gobin
3,631,559	A	1/1972	Gaudry et al.
3,685,081	A	8/1972	Wesemann

(Continued)

FOREIGN PATENT DOCUMENTS

GB	1179898	2/1970

(Continued)

OTHER PUBLICATIONS

Bissell User's Guide Models 1690 and 1695, 14 pages, Copyright 1997.

(Continued)

Primary Examiner—Theresa T. Snider
(74) *Attorney, Agent, or Firm*—Hunton & Williams

(57) **ABSTRACT**

A wet extraction floor cleaning device having a base assembly adapted for movement on a surface being cleaned, an operating handle pivotally attached to the base assembly, a supply tank having a supply tank outlet, and a recovery tank having a recovery tank inlet and a recovery tank outlet. The base assembly has an inlet nozzle that extends from an inlet slit proximal the surface being cleaned to a nozzle outlet. The device further includes a fluid deposition assembly that can be selectively placed in fluid communication with the supply tank outlet, a vacuum source, and first and second external pockets. The supply and recovery tanks are adapted to be selectively placed in the first and second external pockets, thereby placing the supply tank outlet in fluid communication with the fluid deposition system, the recovery tank inlet in fluid communication with the nozzle outlet, and the recovery tank outlet in fluid communication with the vacuum source inlet.

24 Claims, 55 Drawing Sheets

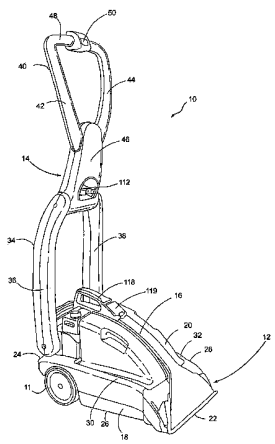

U.S. PATENT DOCUMENTS

3,855,763	A		12/1974	Seifert et al.
3,950,817	A		4/1976	McKaig
3,959,844	A		6/1976	Cyphert
4,019,218	A		4/1977	Cyphert
4,020,526	A		5/1977	Johansson
4,071,920	A		2/1978	Block
4,071,922	A		2/1978	Davies, III et al.
4,200,951	A		5/1980	Burgoon et al.
4,216,563	A		8/1980	Cyphert
4,245,371	A		1/1981	Satterfield
4,272,861	A		6/1981	Notta et al.
4,295,243	A		10/1981	King
4,458,377	A		7/1984	Frohbieter
4,475,265	A		10/1984	Berfield
4,558,484	A		12/1985	Groth
4,586,208	A		5/1986	Trevarthen
4,595,420	A		6/1986	Williams, III et al.
4,596,061	A		6/1986	Henning
4,660,246	A		4/1987	Duncan et al.
4,662,026	A		5/1987	Sumerau et al.
4,670,937	A		6/1987	Sumerau et al.
4,724,573	A	*	2/1988	Ostergaard 15/321
4,763,382	A		8/1988	Sumerau
4,809,396	A		3/1989	Houser
4,809,397	A	*	3/1989	Jacobs et al. 15/320
4,817,233	A		4/1989	Waldhauser
4,864,680	A		9/1989	Blase et al.
4,910,828	A		3/1990	Blase et al.
4,951,346	A		8/1990	Salmon
4,956,891	A		9/1990	Wulff
4,976,003	A		12/1990	Williams
5,088,149	A		2/1992	Berg et al.
5,146,647	A		9/1992	Blase et al.
5,208,940	A		5/1993	London et al.
5,261,215	A		11/1993	Hartz et al.
5,299,608	A		4/1994	Bosyj
5,301,386	A	*	4/1994	Thomas et al. 15/321
5,311,638	A		5/1994	Furcron et al.
5,326,116	A		7/1994	Flax
5,330,037	A		7/1994	Wang
5,331,715	A		7/1994	Johnson et al.
D354,593	S		1/1995	Koike
5,392,491	A		2/1995	Hwang et al.
5,398,567	A		3/1995	Specht
5,400,462	A		3/1995	Amoretti
5,406,673	A		4/1995	Bradd et al.
5,455,982	A		10/1995	Armstrong et al.
5,459,901	A		10/1995	Blase et al.
5,473,792	A		12/1995	Kent et al.
5,493,752	A		2/1996	Crouser et al.
5,500,977	A		3/1996	McAllise et al.
5,513,415	A		5/1996	Kent et al.
5,548,866	A		8/1996	Reed et al.
D374,017	S		9/1996	Chunn et al.
5,613,272	A		3/1997	Huffman
5,636,504	A		6/1997	Kaley et al.
5,640,738	A		6/1997	Williams et al.
D384,083	S		9/1997	Hinklin
5,669,098	A		9/1997	Tono
5,676,405	A		10/1997	Reed
D394,526	S		5/1998	Strandell
5,765,250	A		6/1998	Lee
5,784,755	A		7/1998	Karr et al.
5,797,163	A		8/1998	Whitaker et al.
5,799,362	A		9/1998	Huffman
5,819,364	A		10/1998	Sham
5,819,365	A		10/1998	Huffman et al.
5,836,046	A		11/1998	Huffman et al.
5,839,159	A		11/1998	Karr et al.
5,860,188	A		1/1999	Maurer et al.
5,864,921	A		2/1999	Chou
5,867,857	A		2/1999	Crouser et al.
5,867,864	A		2/1999	Miller et al.
5,870,798	A		2/1999	Crouser et al.
5,887,313	A		3/1999	Hanold et al.
5,896,617	A		4/1999	Kasen et al.
5,901,406	A		5/1999	Mueller et al.
5,933,912	A		8/1999	Karr et al.
5,937,475	A		8/1999	Kasen et al.
5,983,442	A		11/1999	Louis et al.
6,009,593	A		1/2000	Crouser et al.
6,012,200	A		1/2000	Murphy et al.
6,041,472	A		3/2000	Kasen et al.
6,073,300	A		6/2000	Zahuranec et al.
6,081,962	A		7/2000	Kasen et al.
6,082,376	A		7/2000	Karr et al.
6,088,873	A		7/2000	Pacchini et al.
6,101,671	A		8/2000	Wright et al.
6,125,498	A		10/2000	Roberts et al.
6,131,237	A		10/2000	Kasper et al.
6,145,159	A		11/2000	Zahuranec et al.
6,154,917	A		12/2000	Zahuranec et al.
6,158,081	A		12/2000	Kasen et al.
6,167,586	B1		1/2001	Reed, Jr. et al.
6,167,587	B1		1/2001	Kasper et al.
D437,666	S		2/2001	Park
6,185,781	B1		2/2001	Miller et al.
6,192,548	B1		2/2001	Huffman
6,247,202	B1		6/2001	Lesco et al.
6,286,180	B1		9/2001	Kasper et al.
6,311,366	B1		11/2001	Sepke et al.
6,325,864	B1	*	12/2001	Zahuranec et al. 15/320
6,353,964	B1		3/2002	Andrisin, Jr. et al.
6,363,570	B1		4/2002	Kasper et al.
6,368,373	B1		4/2002	Mueller
D456,961	S		5/2002	Ng
D460,973	S		7/2002	Jong
6,438,793	B1		8/2002	Miner et al.
6,467,122	B1		10/2002	Lenkiewicz et al.
6,513,188	B1		2/2003	Zahuranec et al.
6,533,871	B1		3/2003	Zahuranec et al.
6,550,098	B1		4/2003	Roberts et al.
6,564,423	B1		5/2003	Sergyeyenko et al.
6,629,332	B1	*	10/2003	Morgan et al. 15/320
2003/0051310	A1		3/2003	Morgan et al.
2003/0226230	A1		12/2003	Hertrick et al.
2005/0060837	A1		3/2005	Johnson et al.

FOREIGN PATENT DOCUMENTS

GB	2072496	10/1981
GB	2304031	3/1997

OTHER PUBLICATIONS

Bissell User's Guide Model 16981 Series, 18 pages, Copyright 1998.

Hoover Steamvac V2 Deep Cleaner Manual, 15 pages, Copyright 2002.

Regina Steemer Carpet Cleaner Owner's Manual, 12 pages, undated.

* cited by examiner

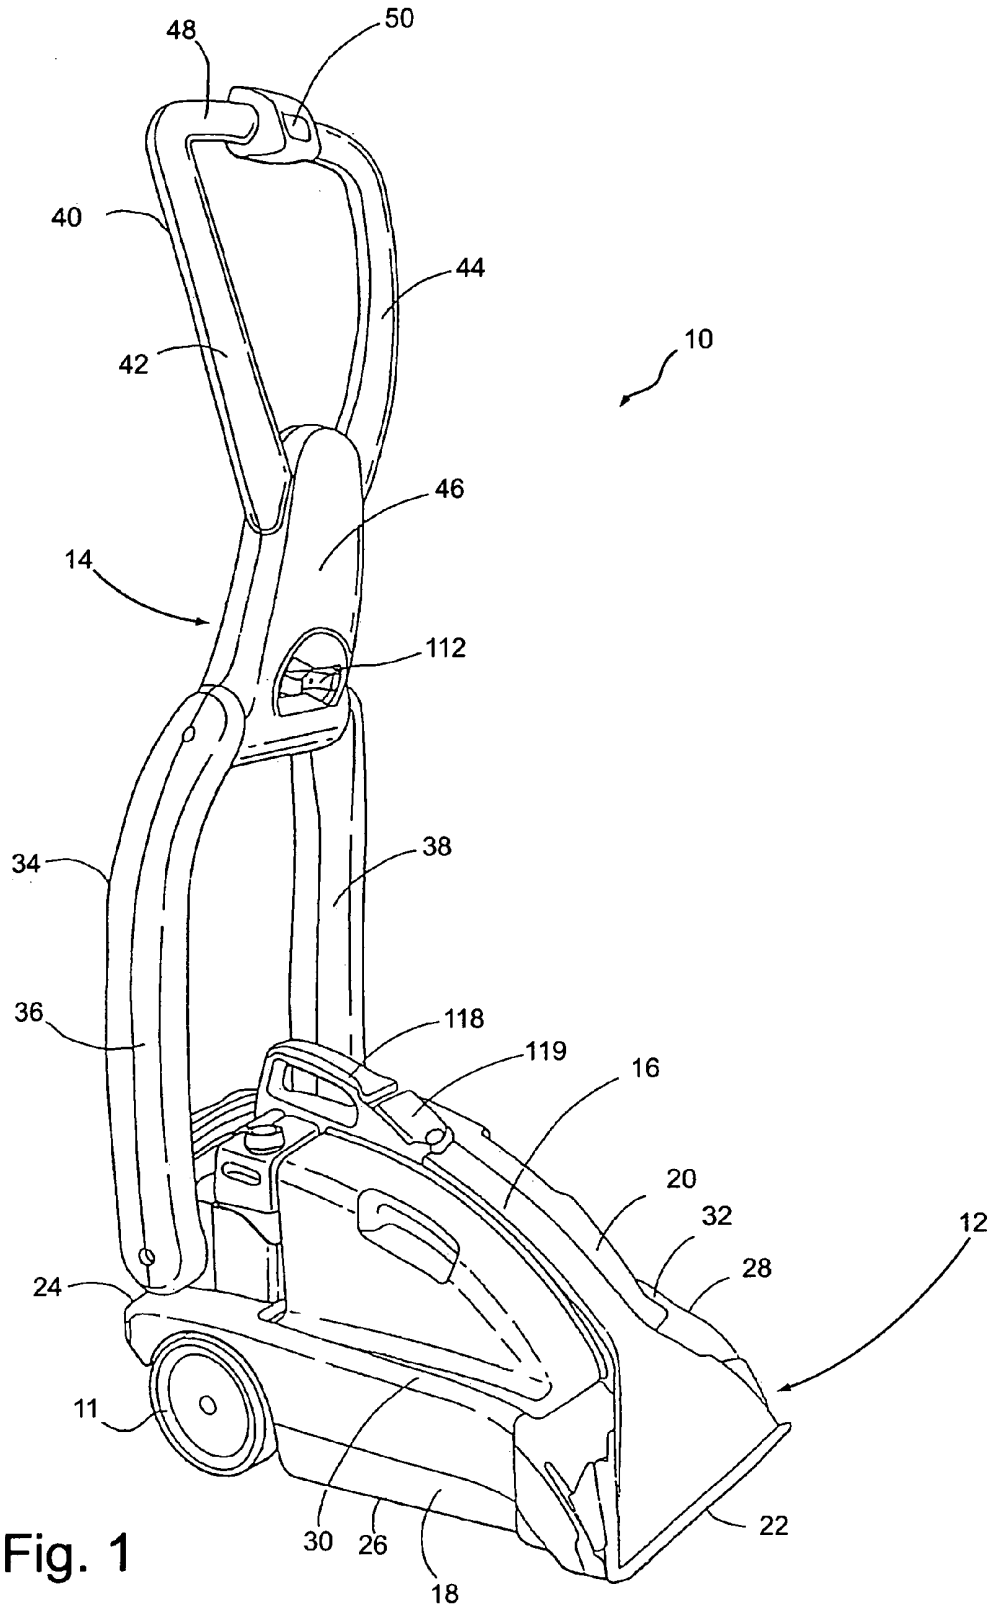
48
50
40
44
42
10
46
14
112
34
38
36
118
119
16
20
32
12
28
24
11
30
26
18
22

Fig. 1

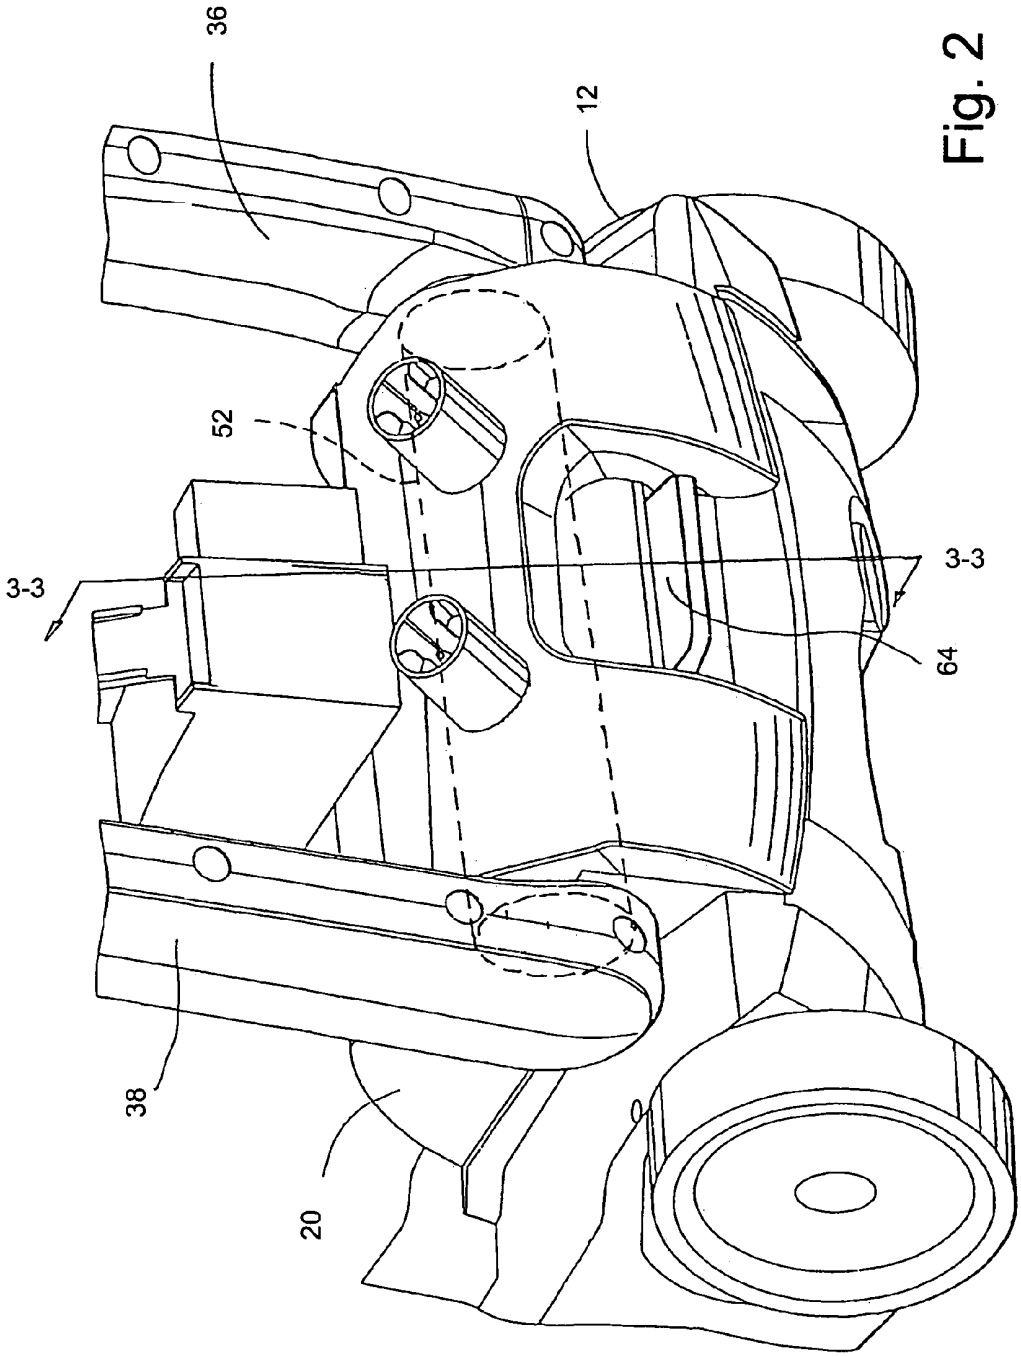

Fig. 2

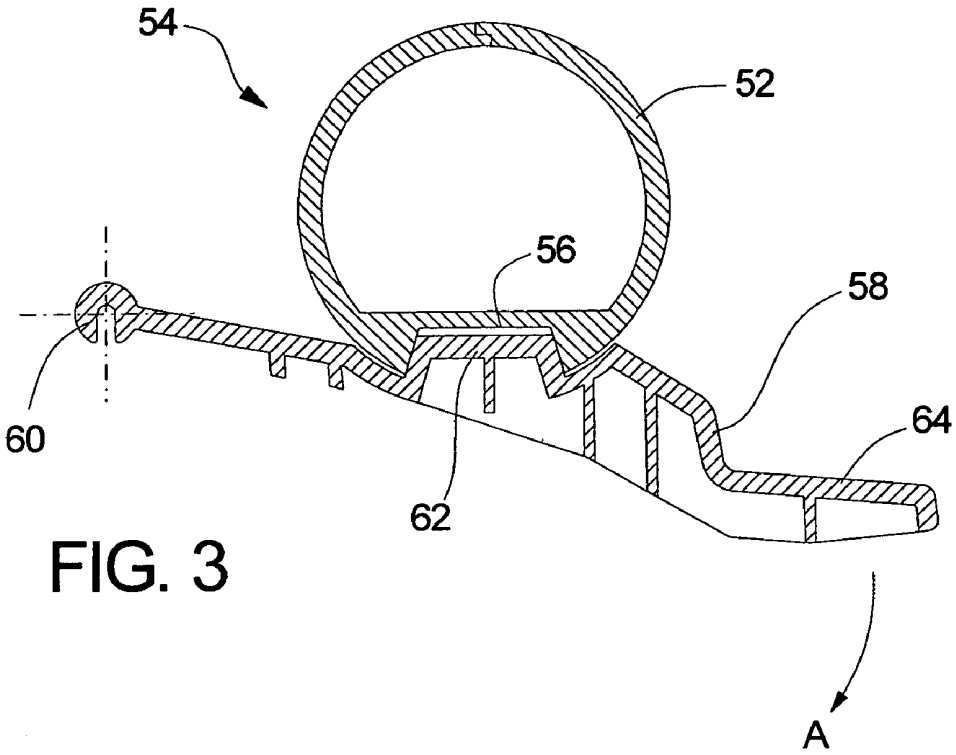

FIG. 3

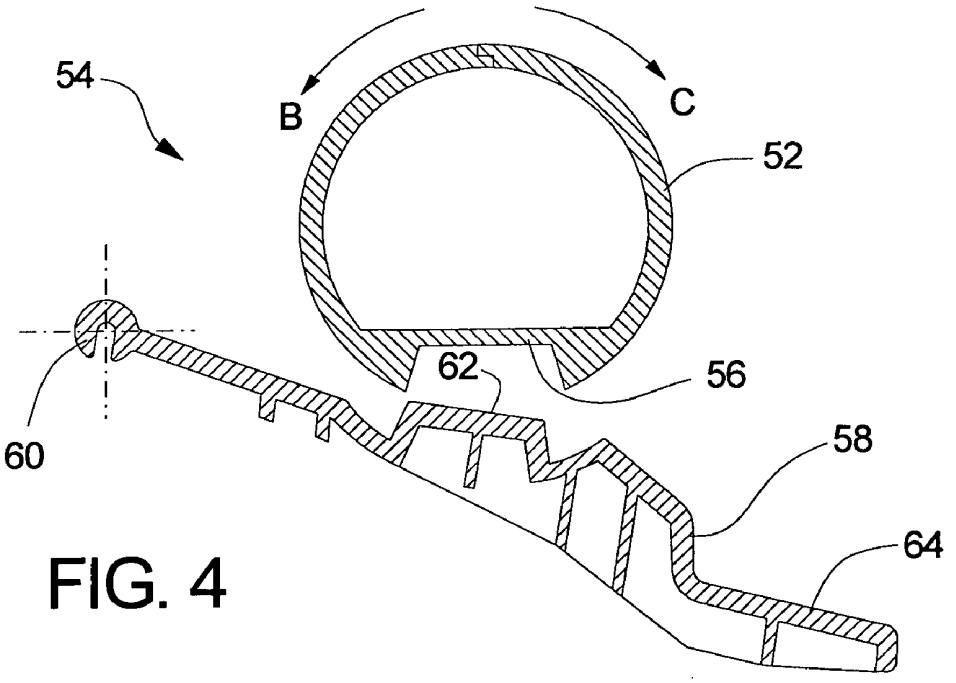

FIG. 4

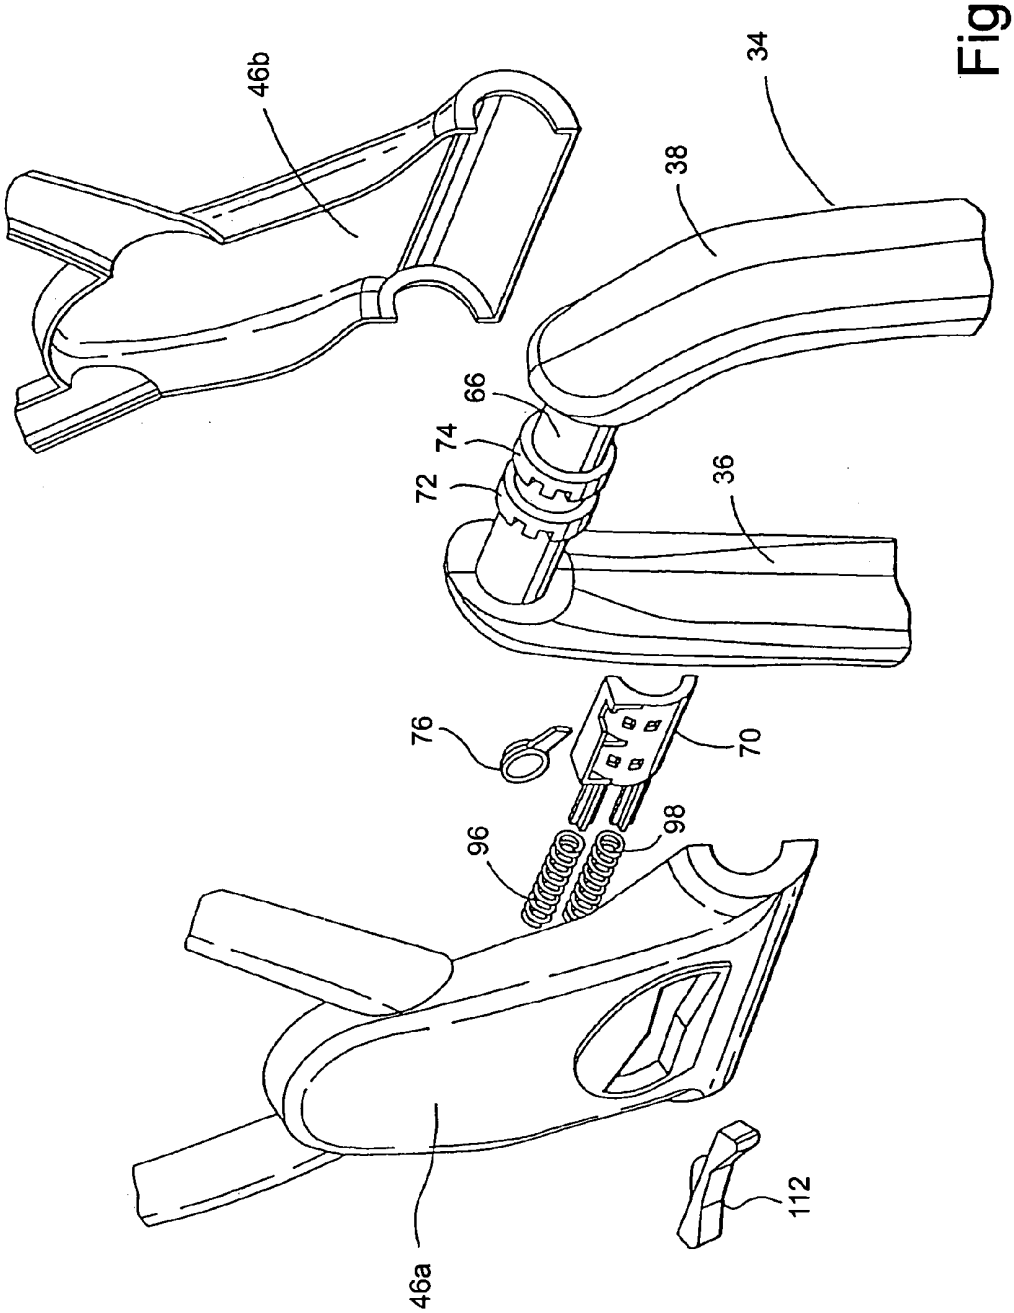

Fig. 5

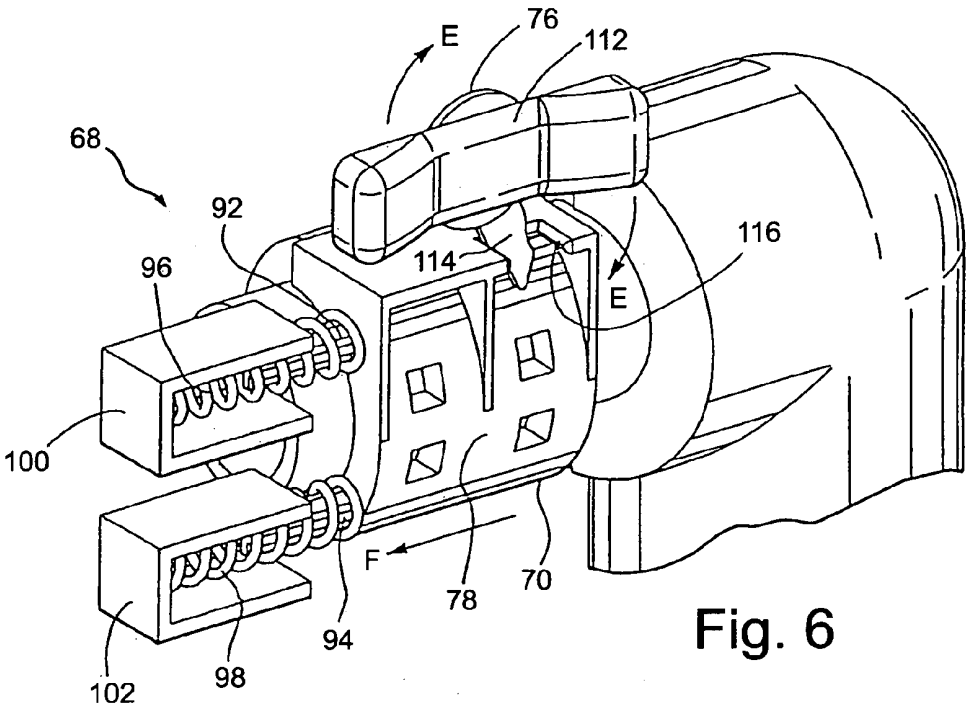
E
76
112
68
92
116
114
96
E
100
F
78
70
94
102
98

Fig. 6

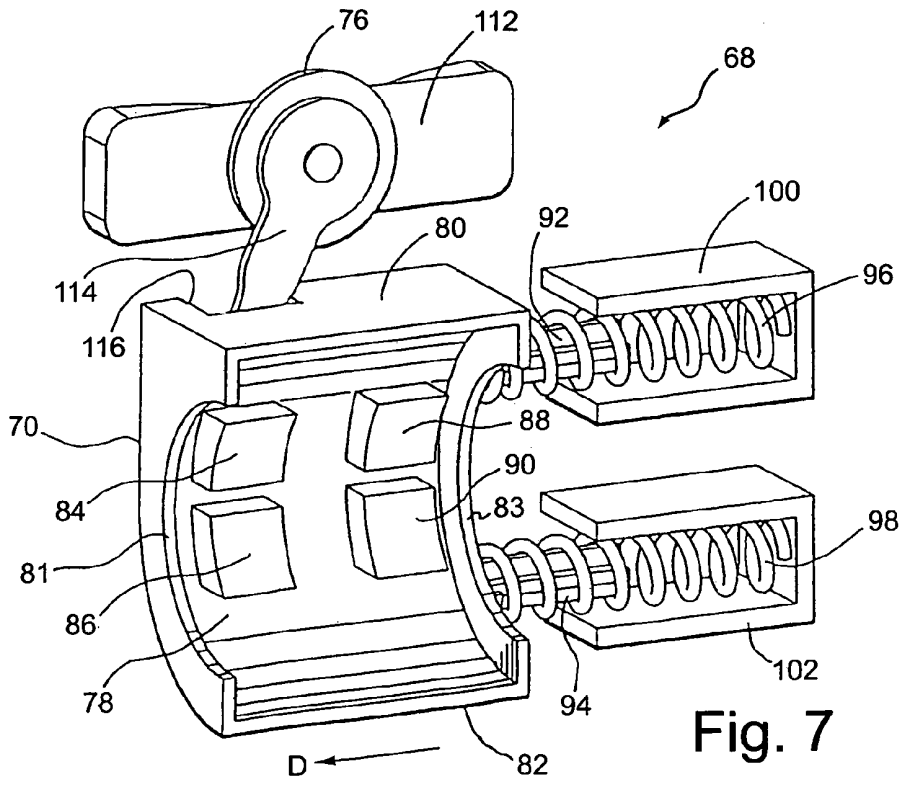
76
112
68
100
80
92
114
96
116
70
88
90
84
83
98
81
86
102
78
94
D
82

Fig. 7

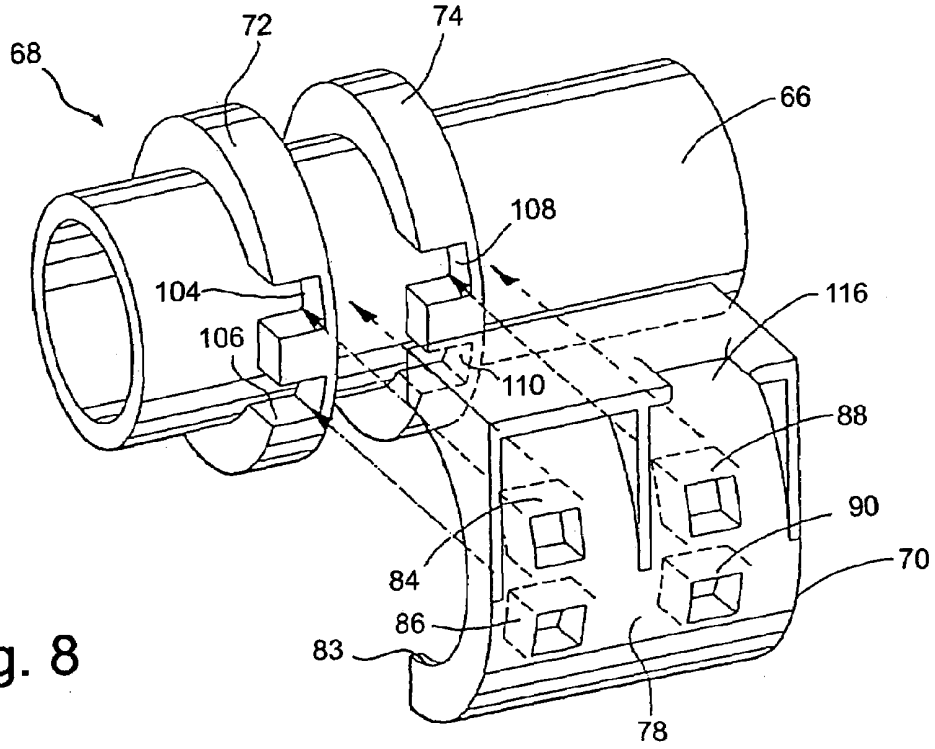
68
72
74
66
108
104
106
110
116
88
90
84
70
86
83
78

Fig. 8

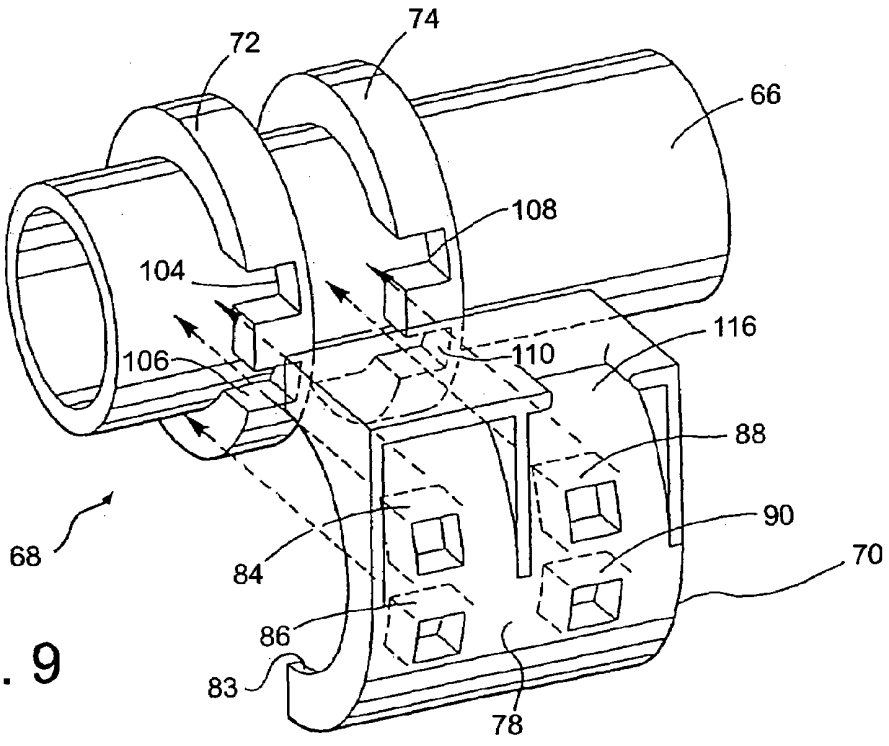
72
74
66
108
104
106
110
116
88
68
90
84
70
86
83
78

Fig. 9

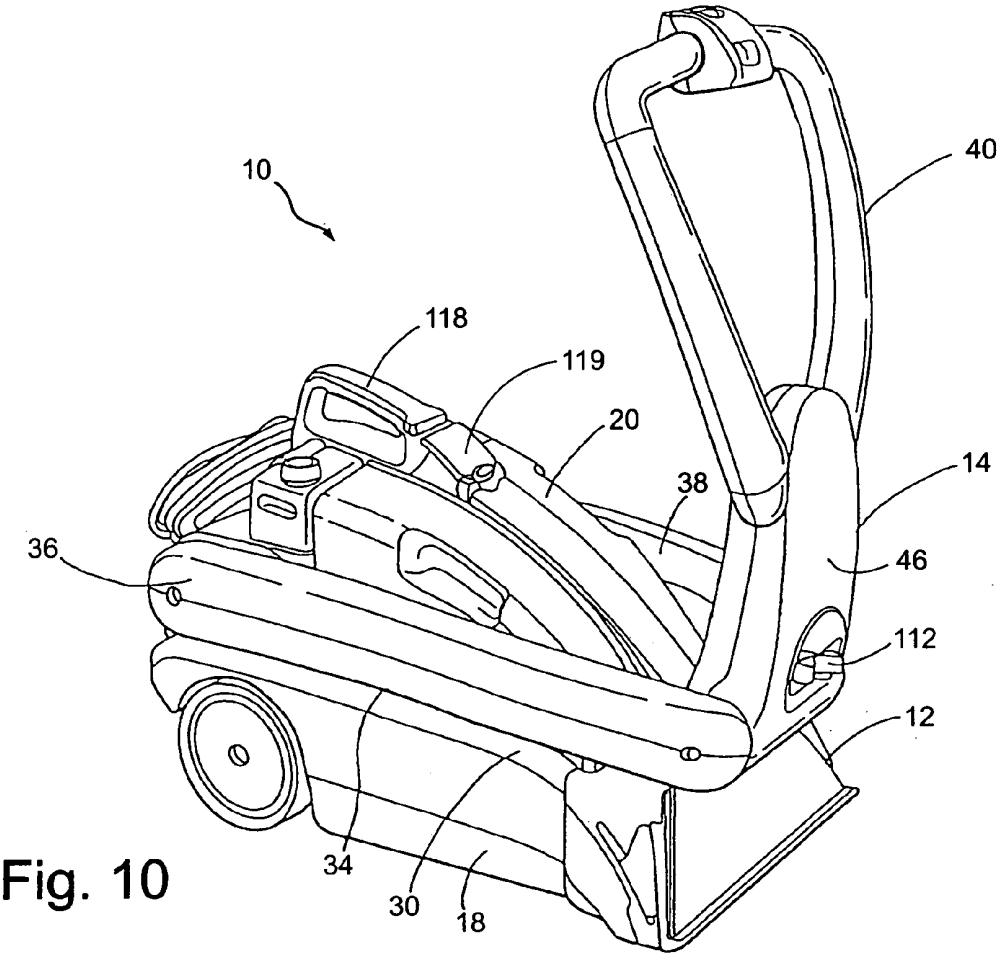
10
40
118
119
20
38
14
36
46
112
12
34
30
18

Fig. 10

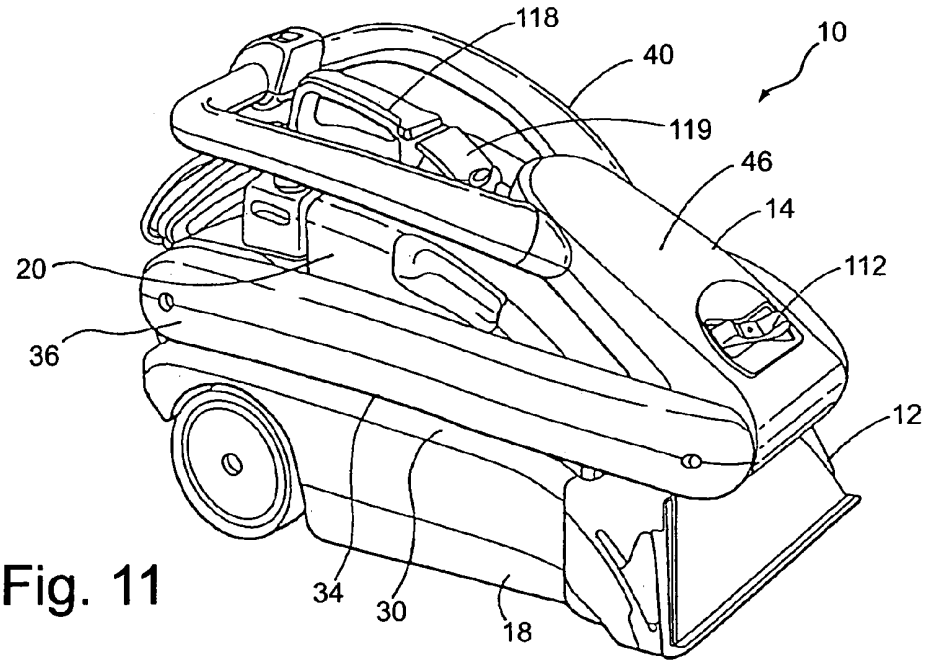
118
40
10
119
46
14
20
112
36
12
34
30
18

Fig. 11

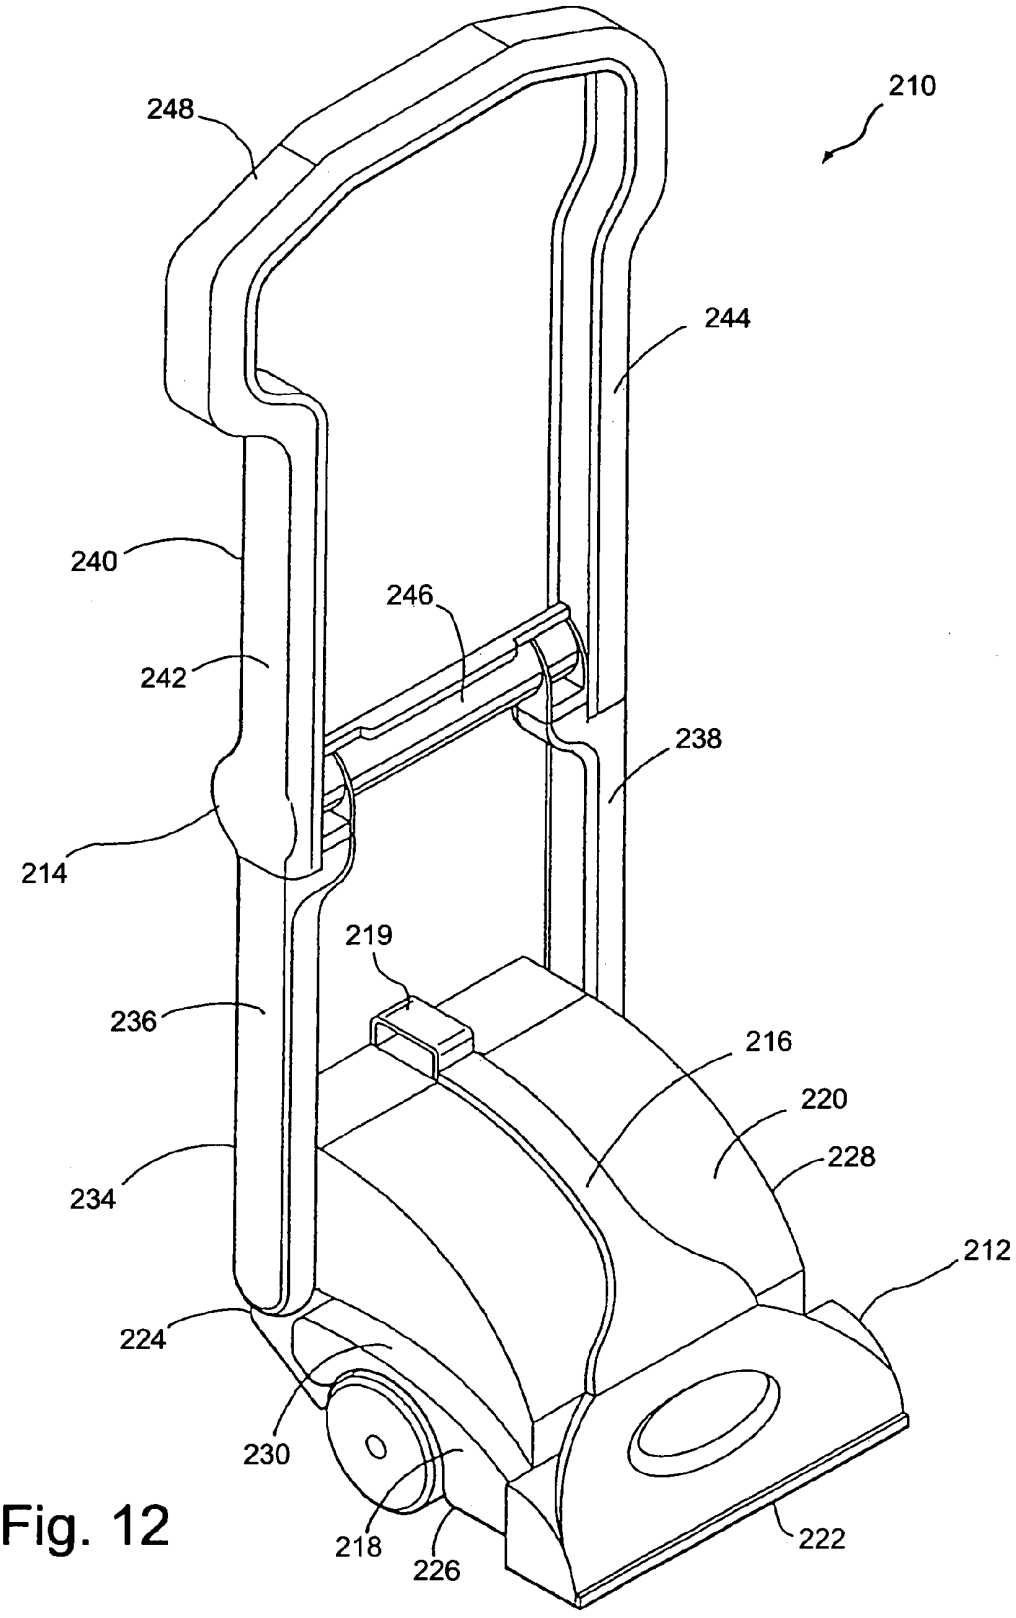
210
248
244
240
246
242
238
214
219
236
216
220
228
234
212
224
230
218
226
222

Fig. 12

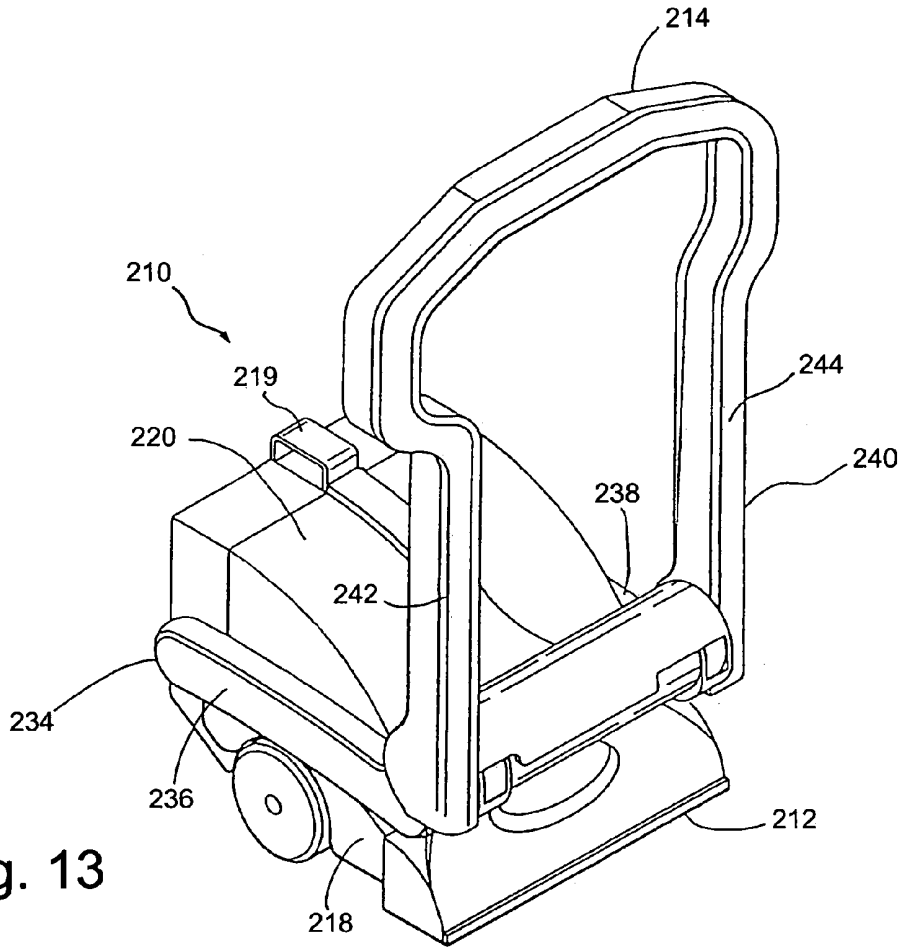
214
210
219
220
244
240
238
242
234
236
212
218

Fig. 13

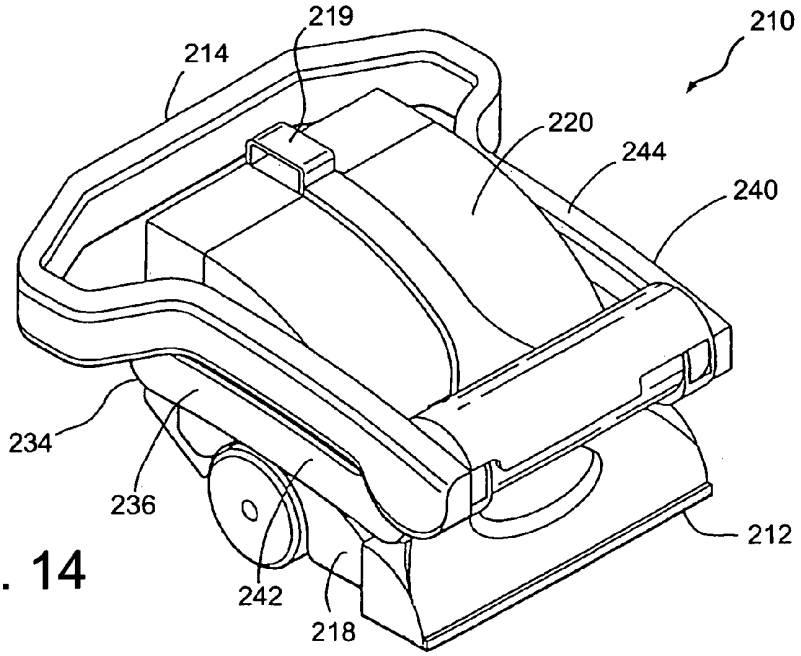
219
214
210
220
244
240
234
236
212
242
218

Fig. 14

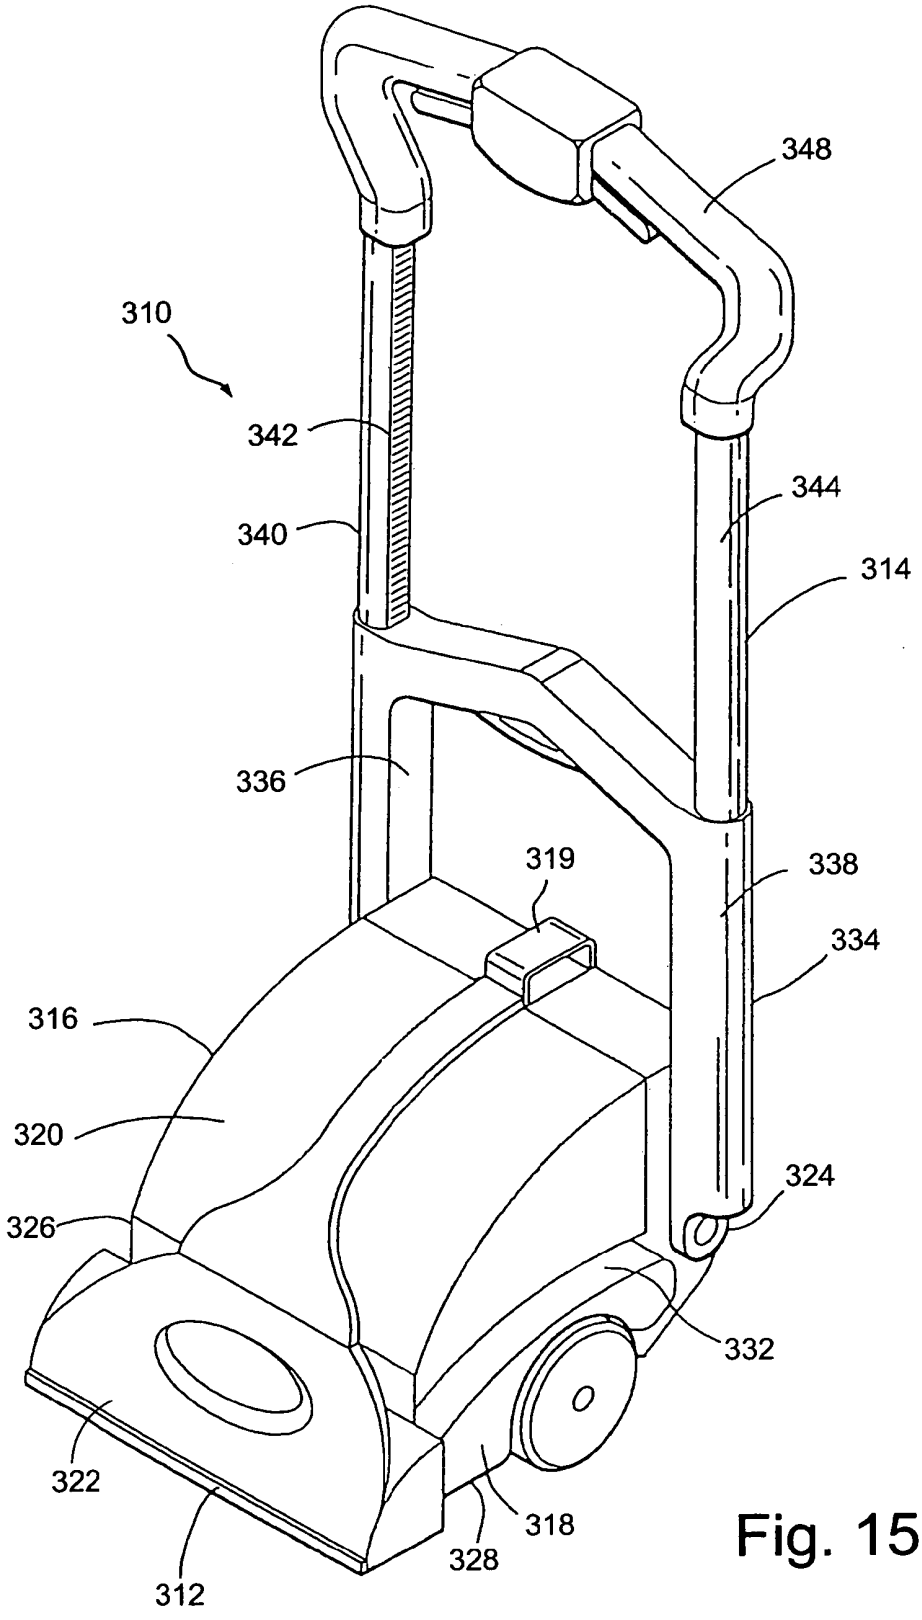
348
310
342
344
340
314
336
319
338
334
316
320
324
326
332
322
318
328
312

Fig. 15

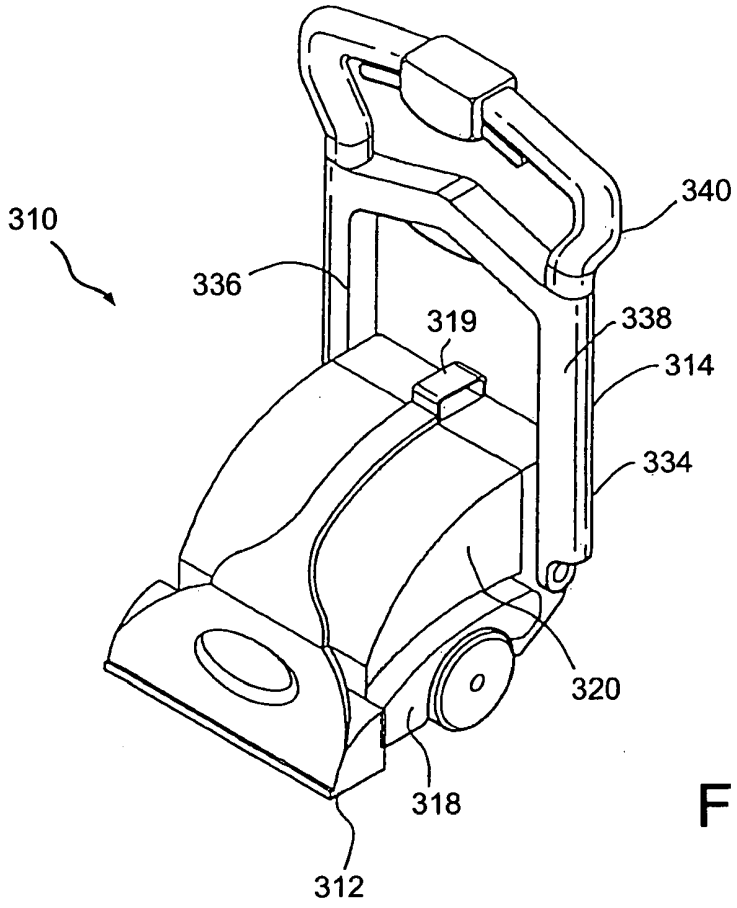
310
340
336
319
338
314
334
320
318
312

Fig. 16

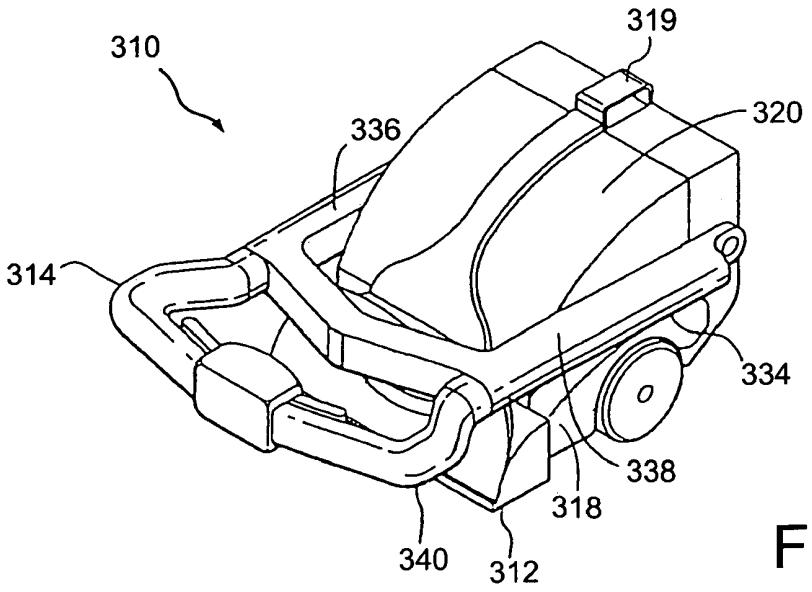
319
310
320
336
314
334
338
318
340
312

Fig. 17

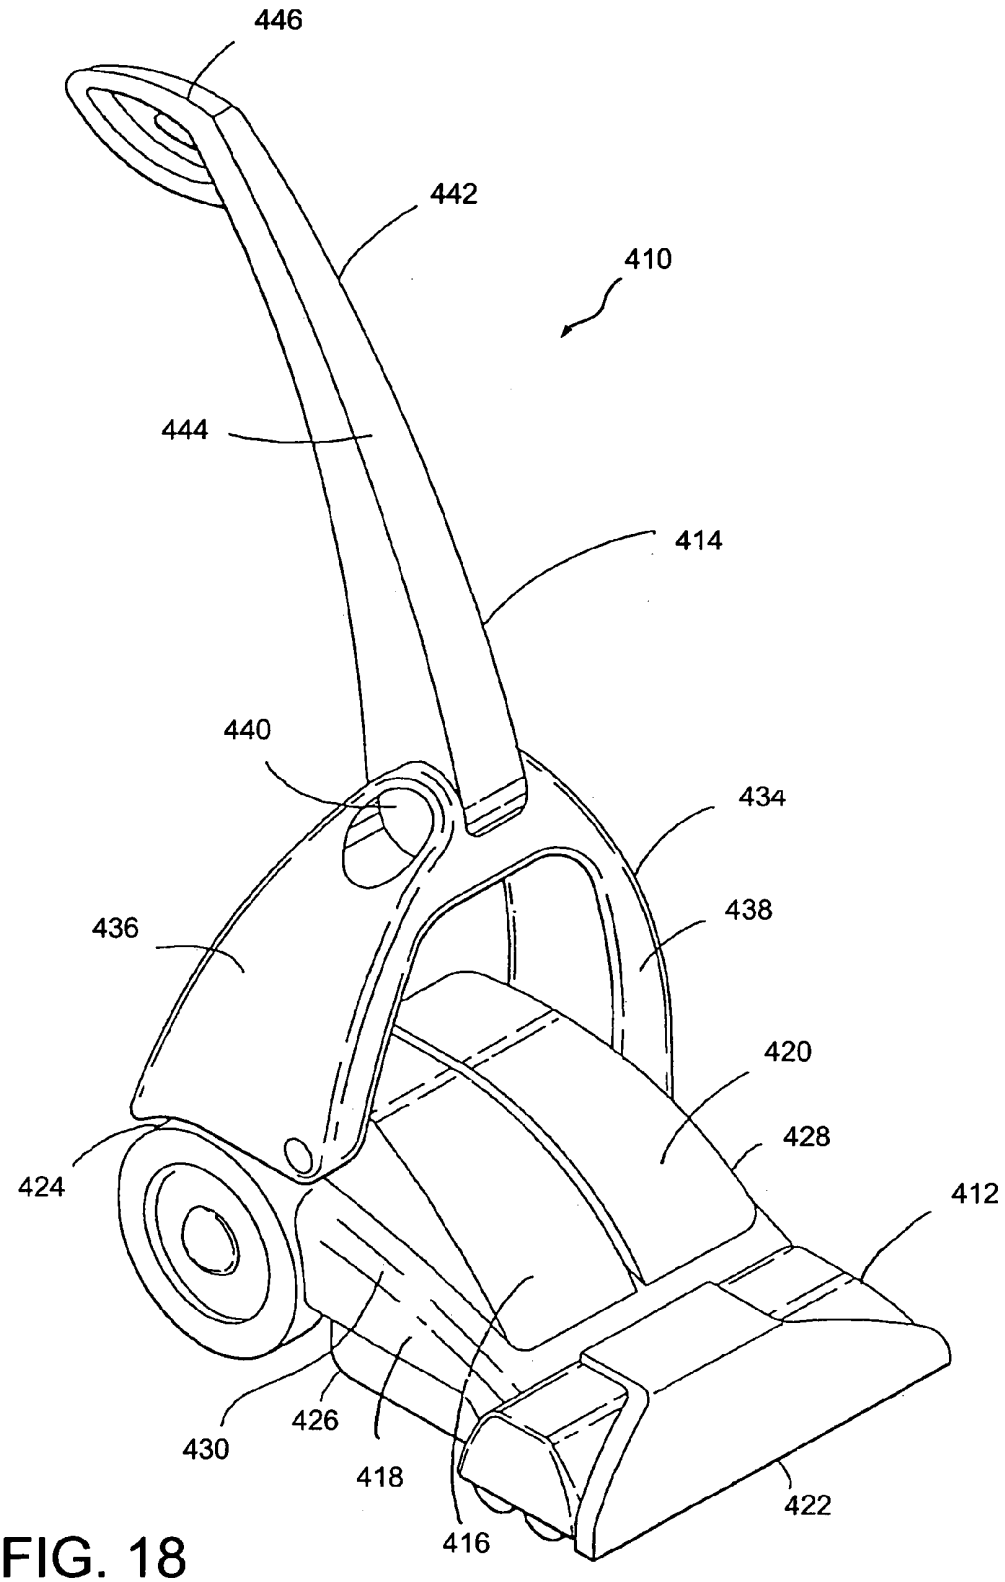
446
442
410
444
414
440
434
436
438
420
428
424
412
426
430
418
422
416

FIG. 18

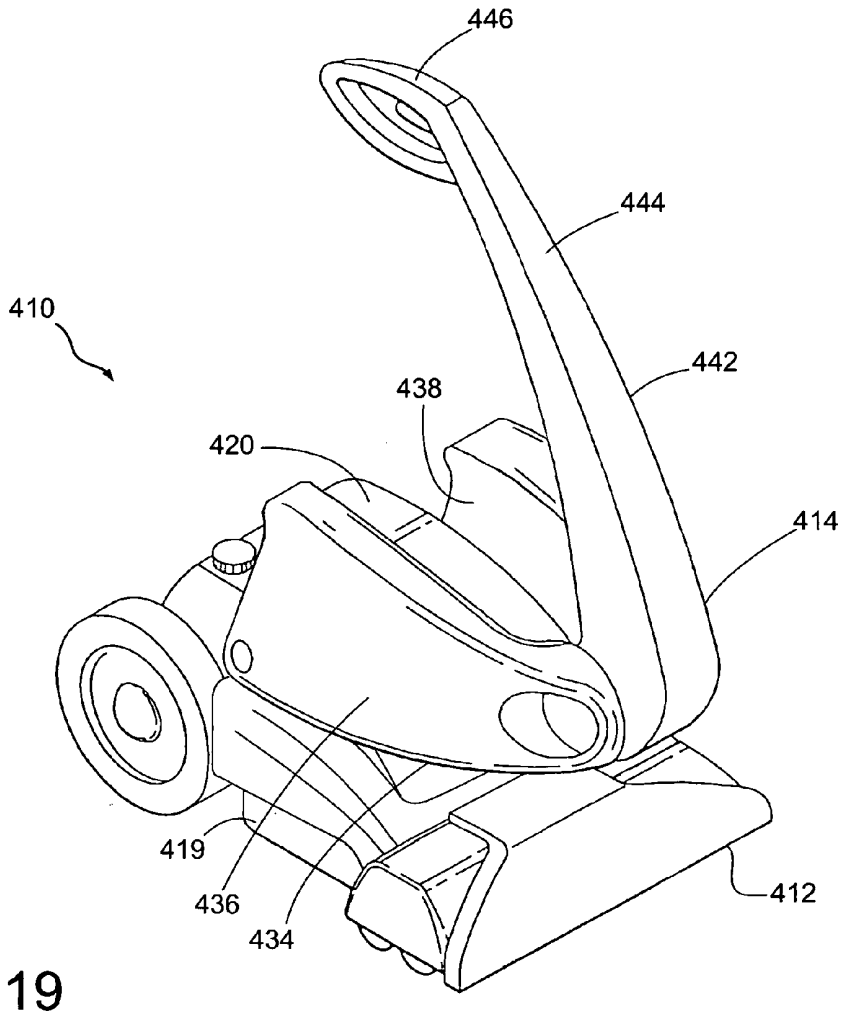
446
444
410
442
438
420
414
419
436
434
412

Fig. 19

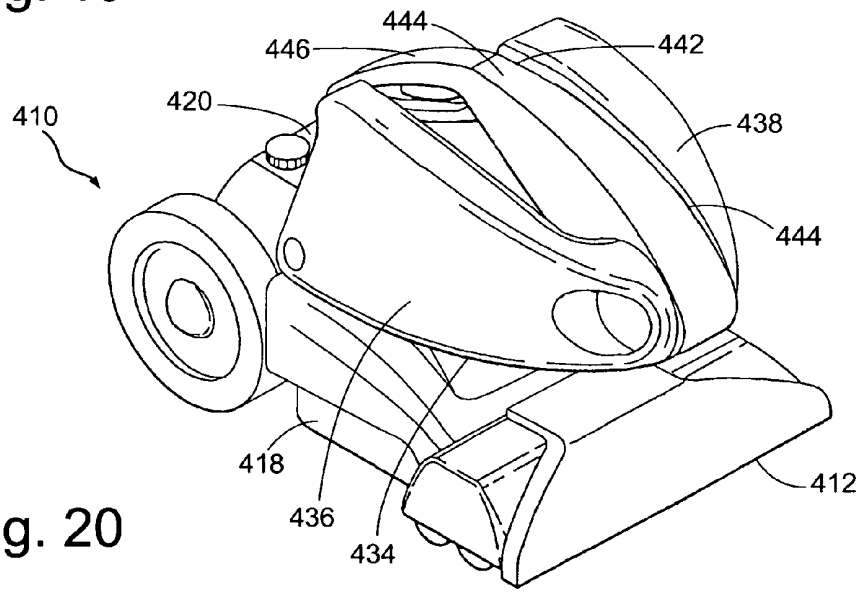
444
446
442
420
410
438
444
418
436
434
412

Fig. 20

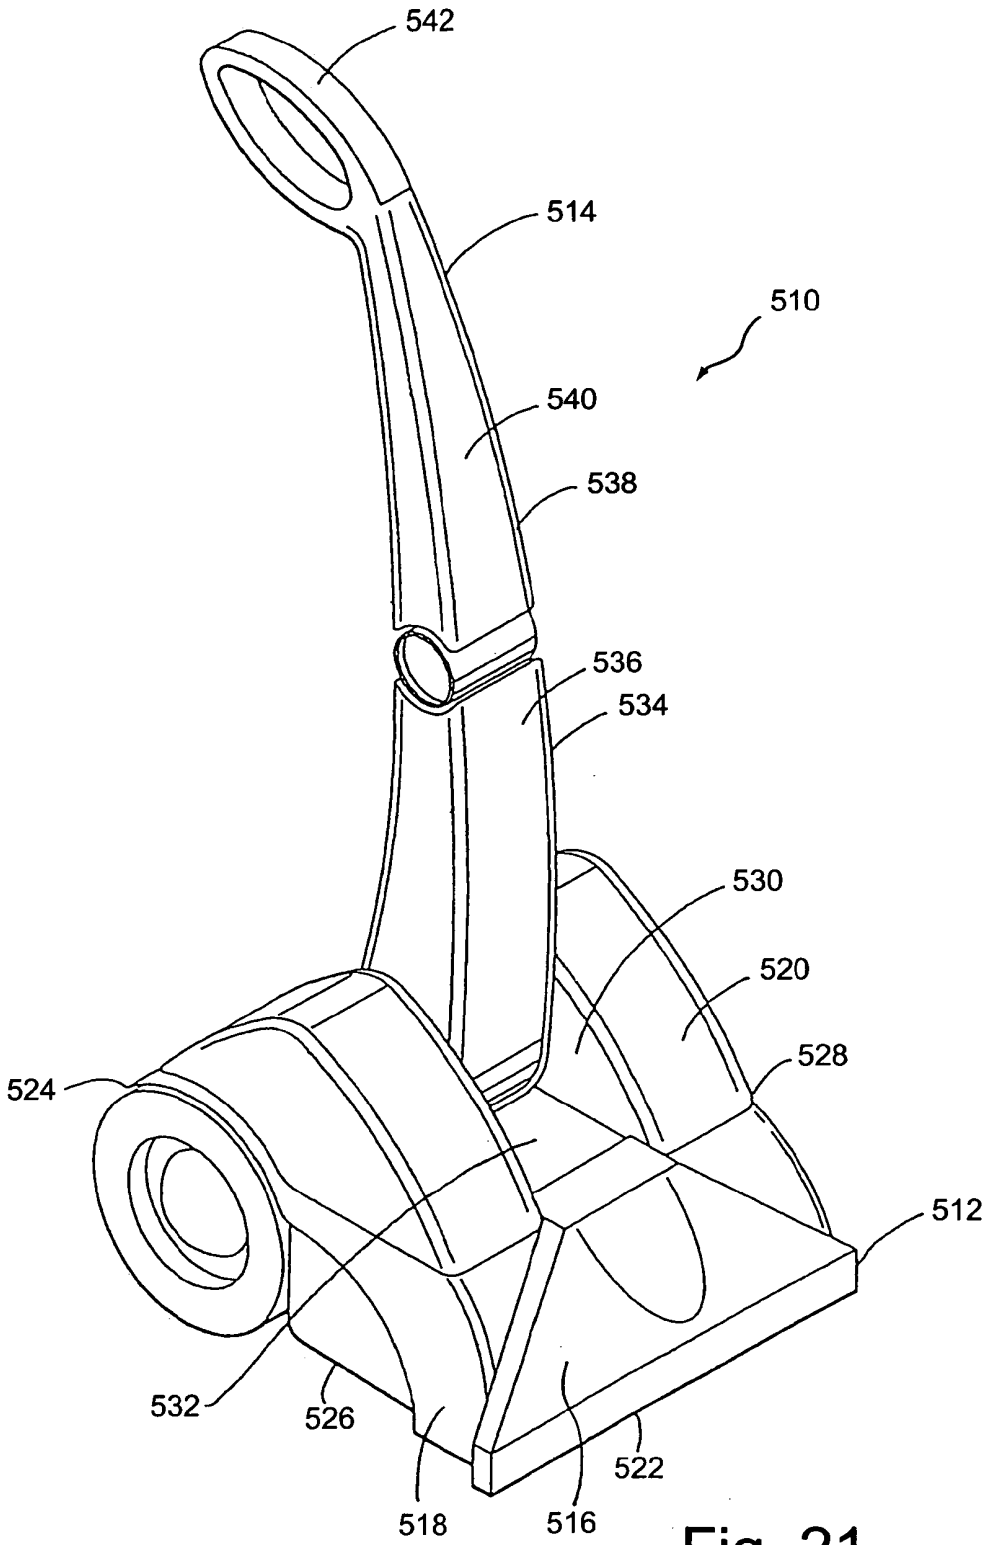
542
514
510
540
538
536
534
530
520
528
524
512
532
526
518
516
522

Fig. 21

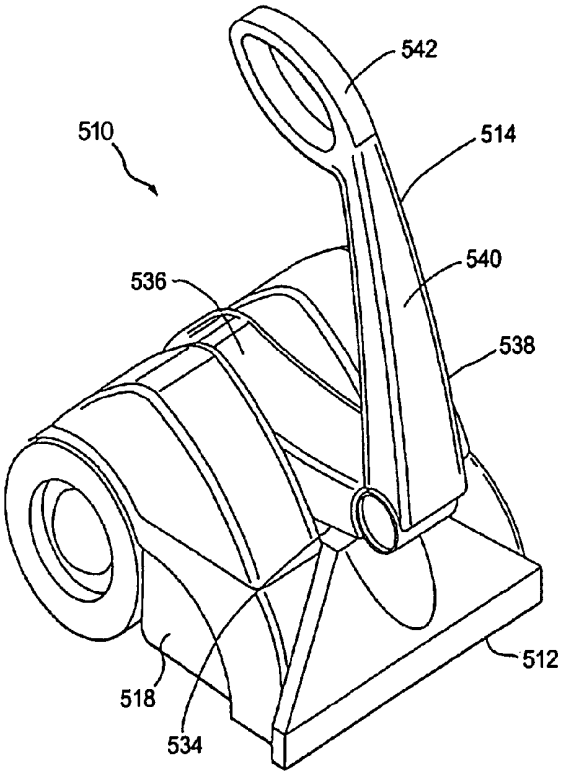
542
510
514
540
536
538
512
518
534

Fig. 22

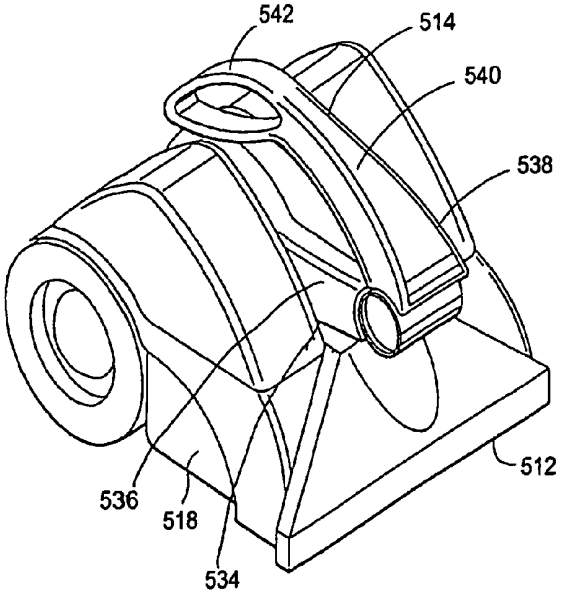
542
514
510
540
538
536
518
512
534

Fig. 23

FIG. 24

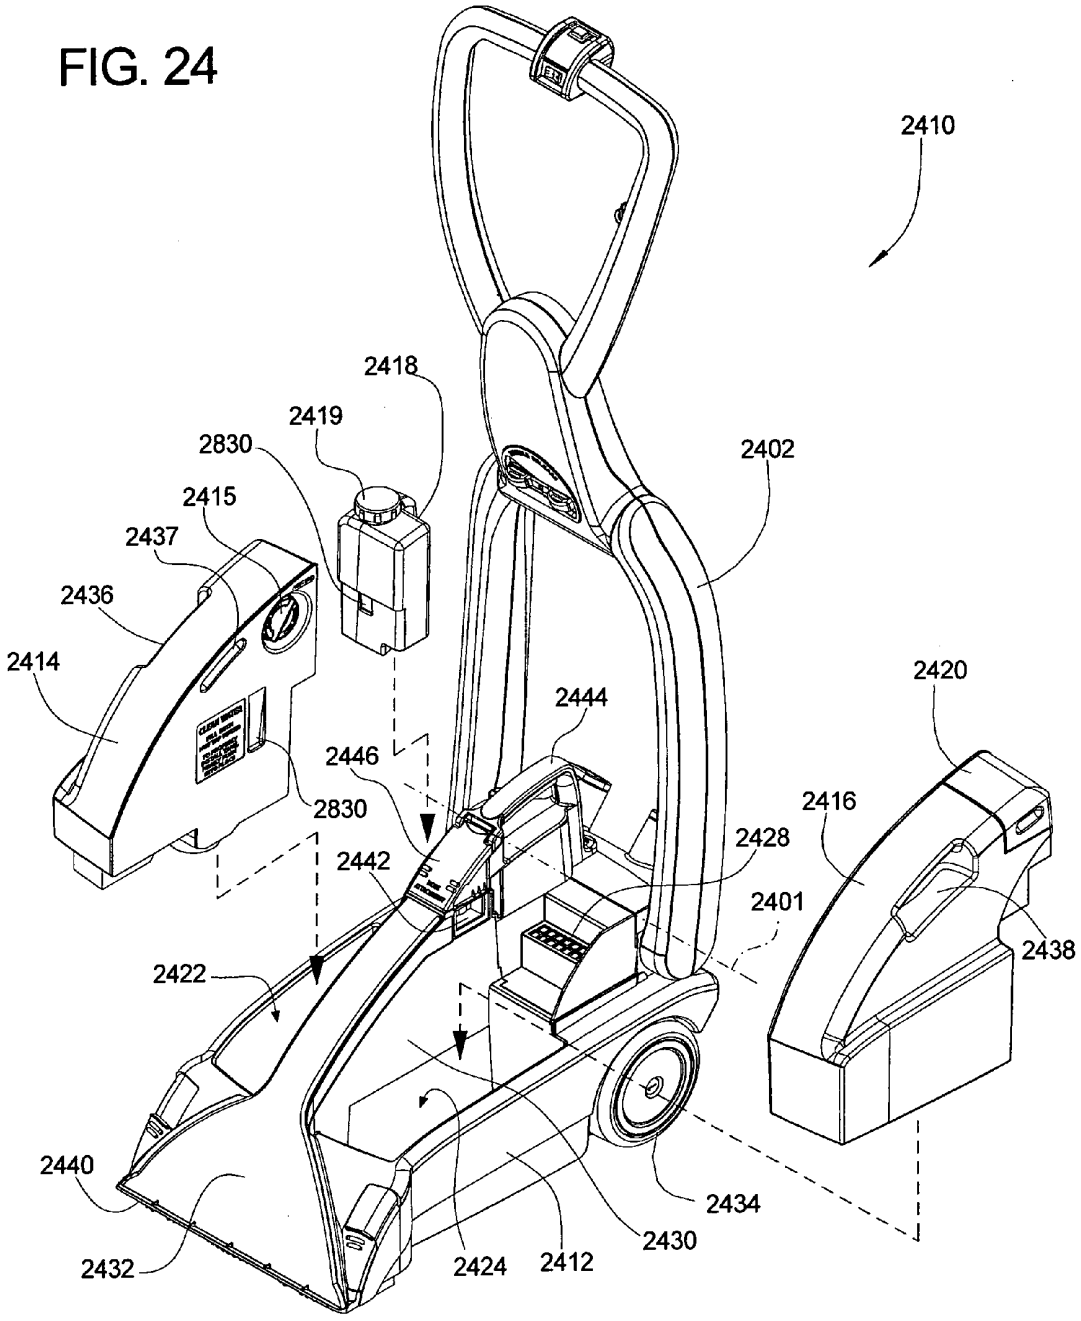
2410
2418
2419
2830
2415
2437
2436
2414
2402
2444
2446
2830
2442
2428
2401
2420
2416
2438
2422
2440
2432
2424
2412
2430
2434

FIG. 25

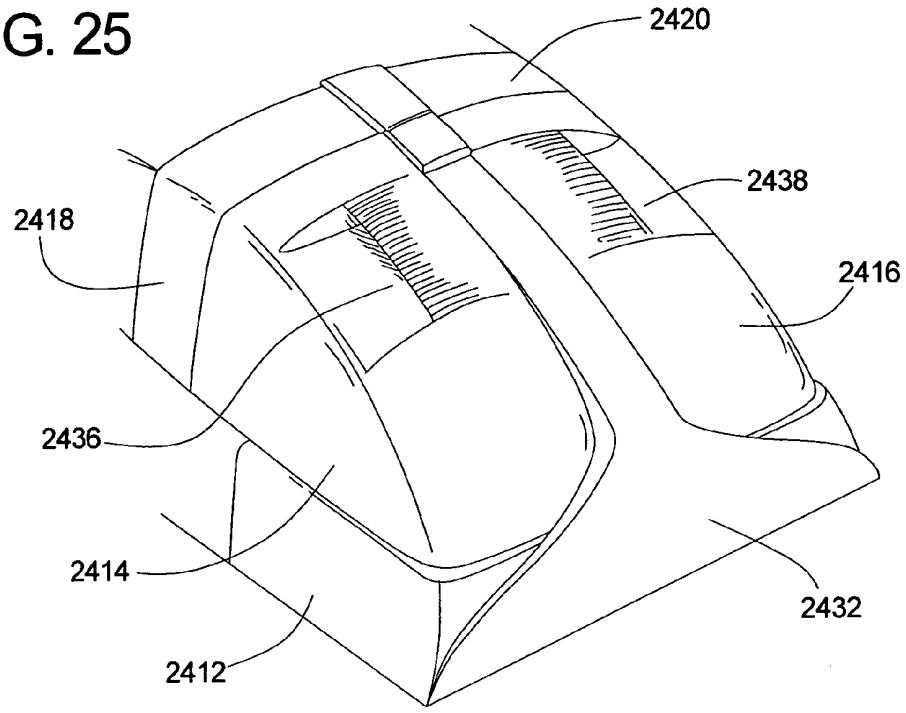
2420
2438
2418
2416
2436
2414
2432
2412

FIG. 26

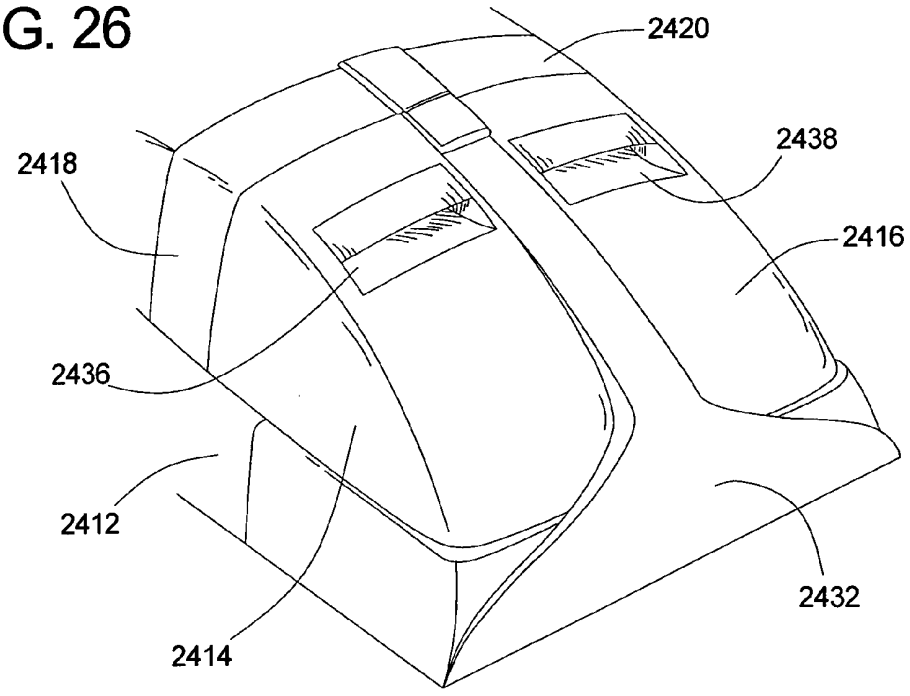
2420
2438
2418
2416
2436
2412
2432
2414

FIG. 27A

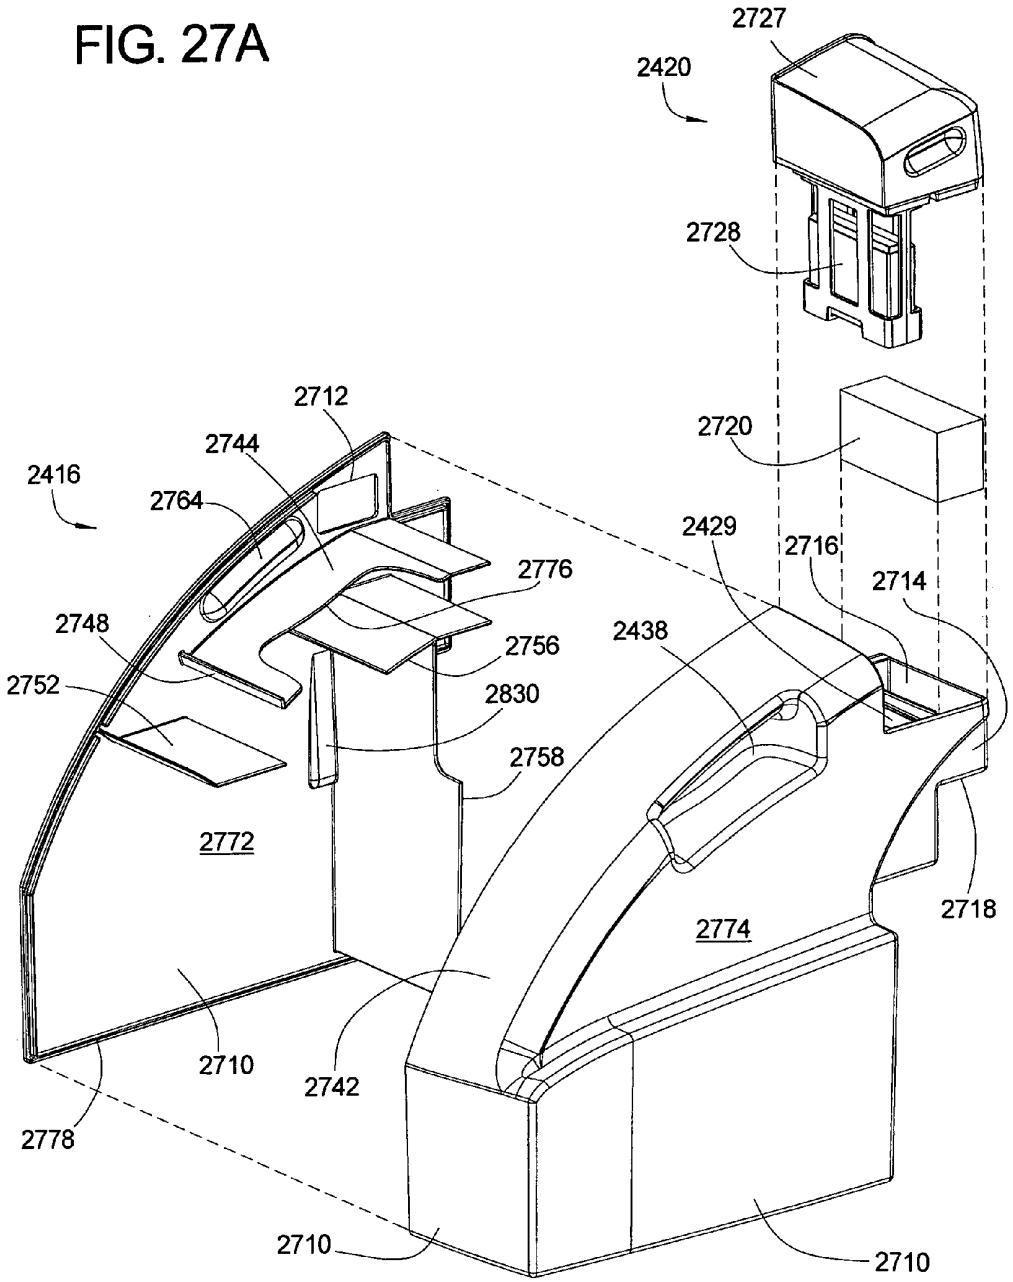
2727
2420
2728
2712
2744
2416
2764
2720
2429
2716
2714
2776
2748
2756
2438
2752
2830
2758
2772
2774
2718
2710
2742
2778
2710
2710

FIG. 27B

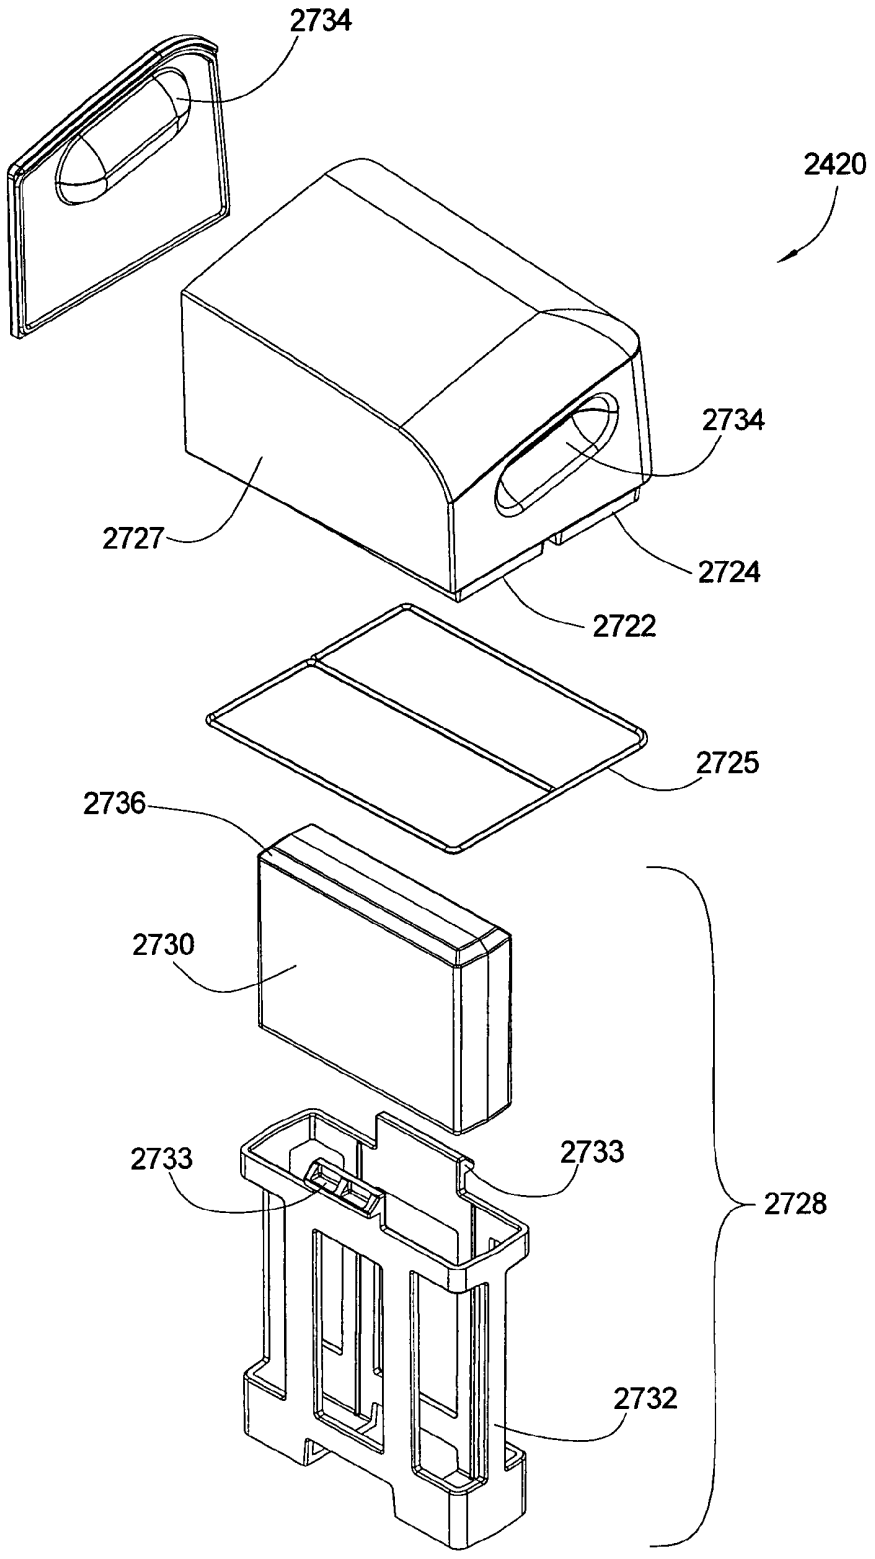
2734
2420
2734
2727
2724
2722
2725
2736
2730
2733
2733
2728
2732

FIG. 27C

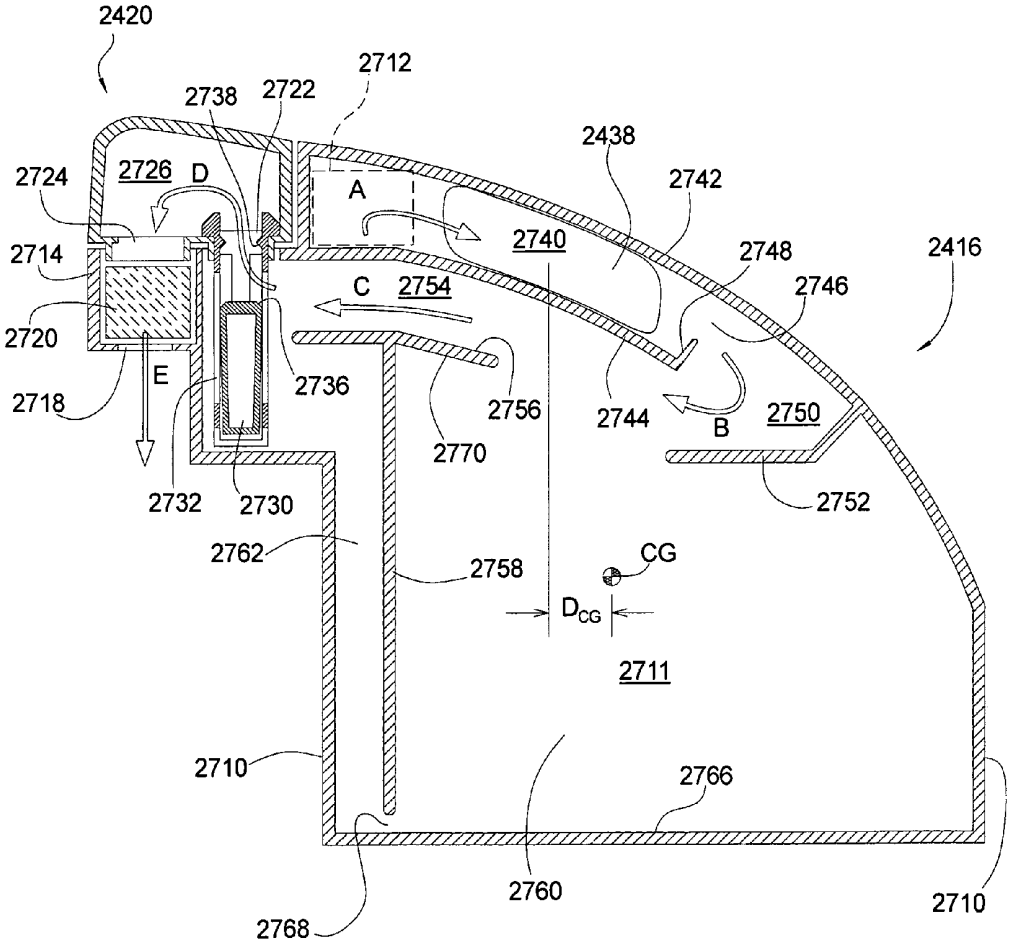
2420
2712
2738
2722
2438
2724
2726
D
A
2742
2740
2748
2416
2714
C
2754
2746
2720
E
2736
2756
2744
B
2750
2718
2770
2732
2730
2752
2762
2758
CG
D_{CG}
2711
2710
2766
2760
2710
2768

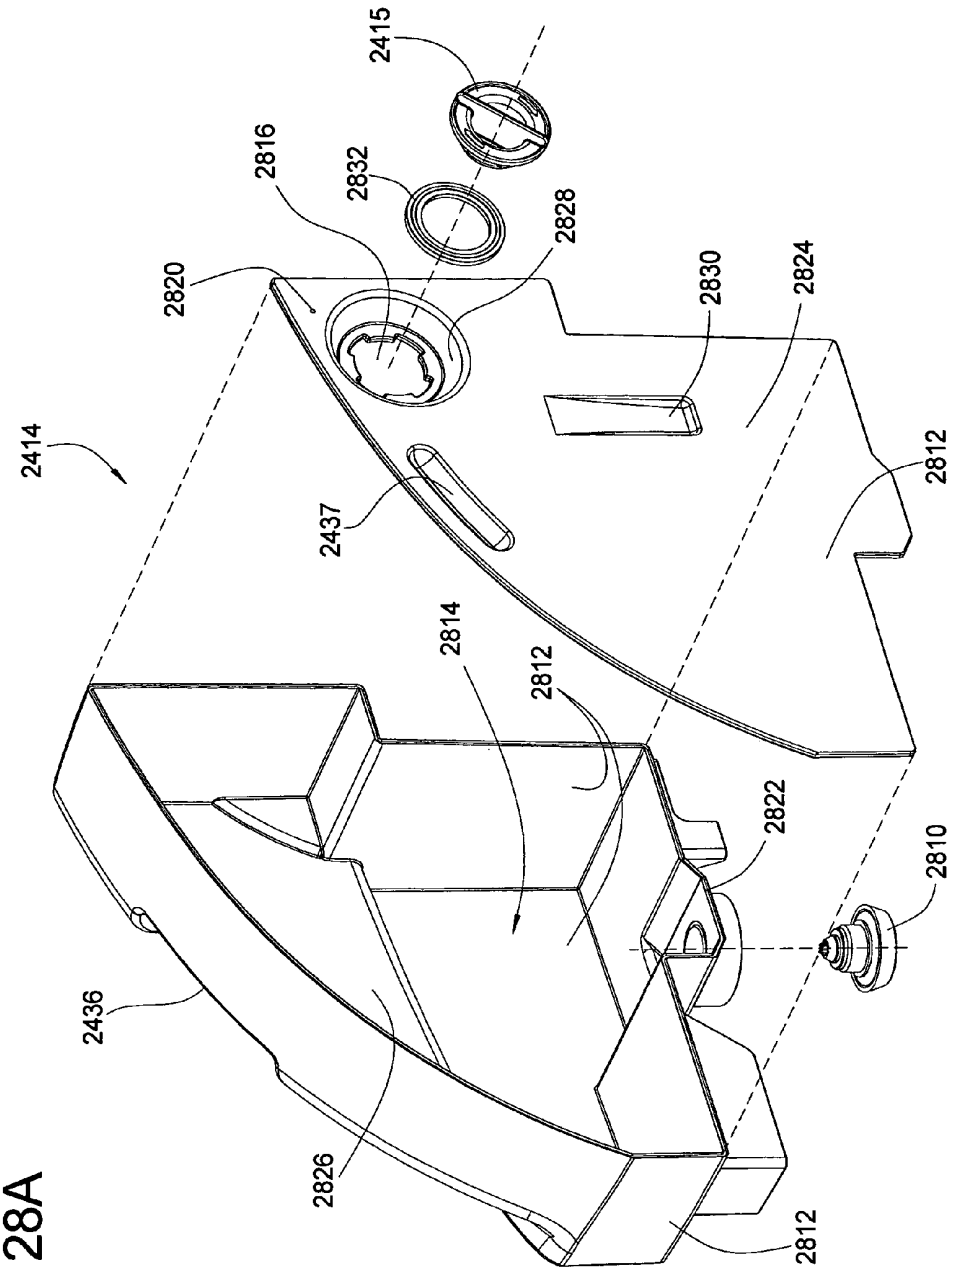
2415
2816
2832
2828
2820
2830
2824
2414
2812
2437
2814
2812
2822
2810
2436
2826
2812

FIG. 28A

FIG. 28B

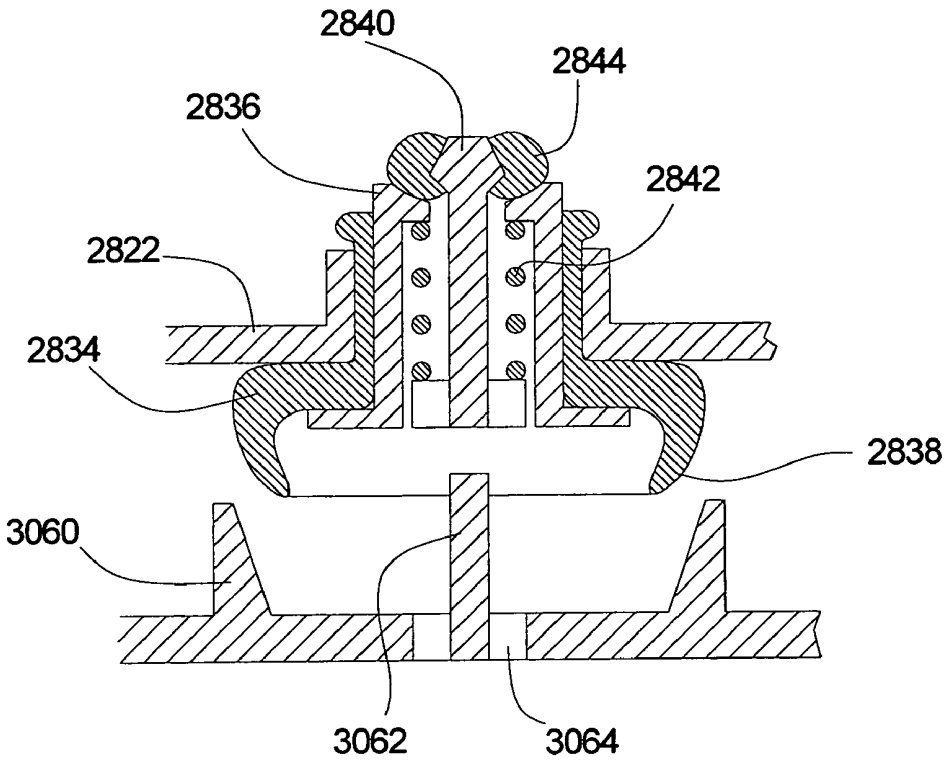

FIG. 29

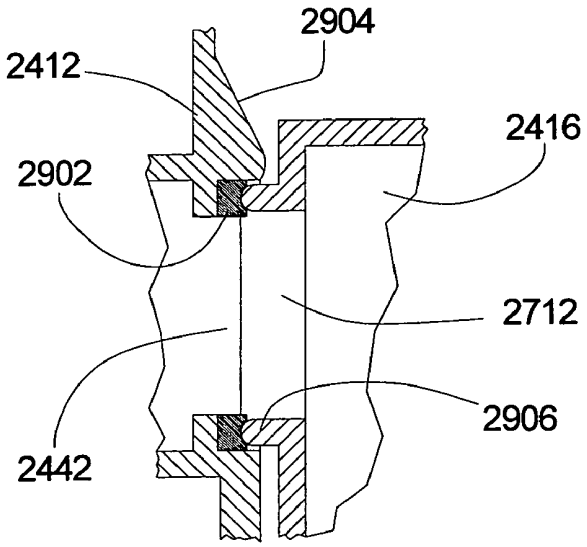

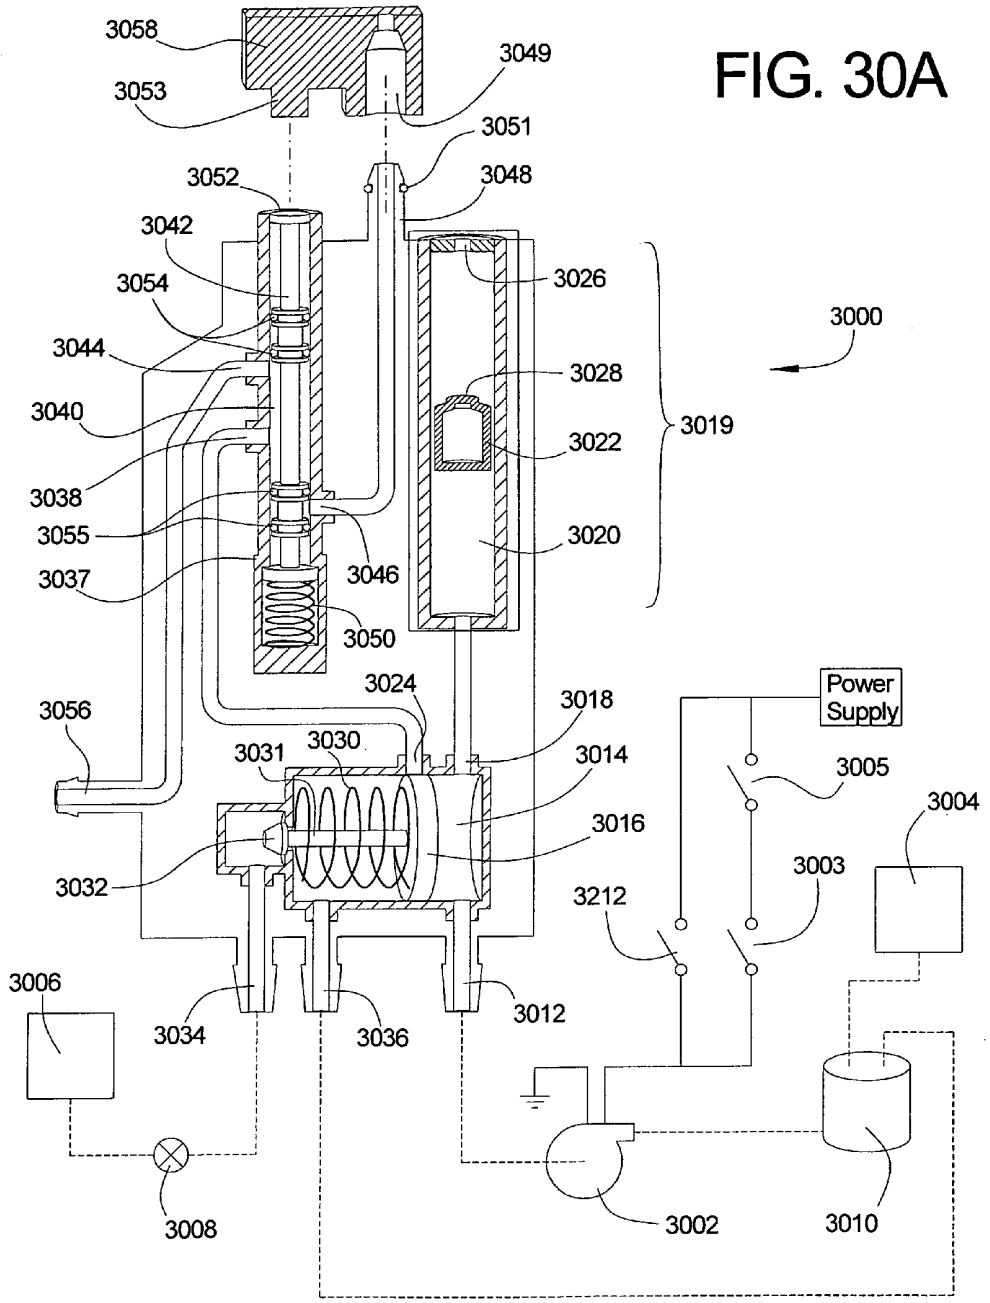
3058
3049
3053
3051
3052
3048
3042
3026
3054
3000
3044
3028
3040
3019
3022
3038
3055
3020
3046
3037
3050
3024
3018
3056
3030
3031
3014
3005
3004
3016
3003
3032
3212
3006
3034
3036
3012
3008
3002
3010
Power Supply

FIG. 30A

FIG. 31

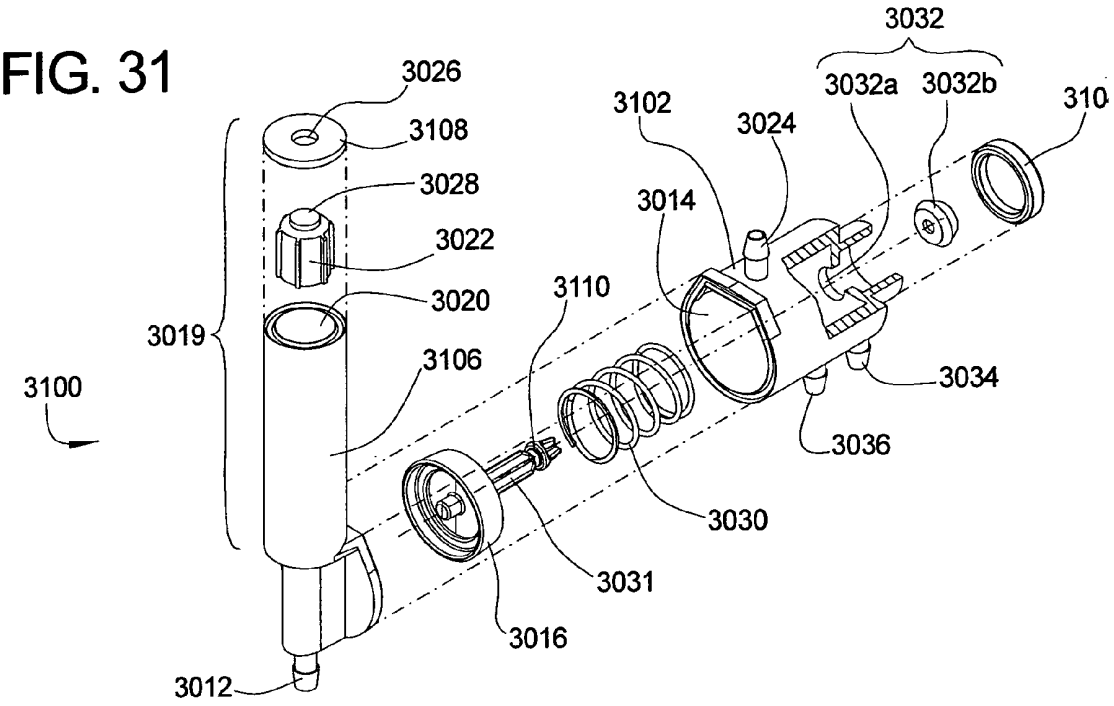
3032
3026
3032a
3032b
310
3102
3024
3108
3028
3014
3022
3110
3020
3019
3106
3100
3034
3036
3030
3031
3016
3012

FIG. 32

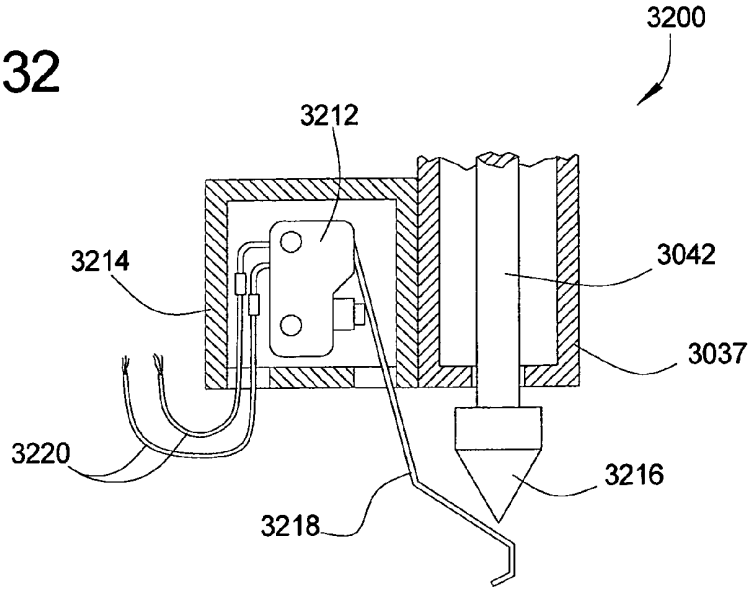
3200
3212
3214
3042
3037
3220
3216
3218

FIG. 33A

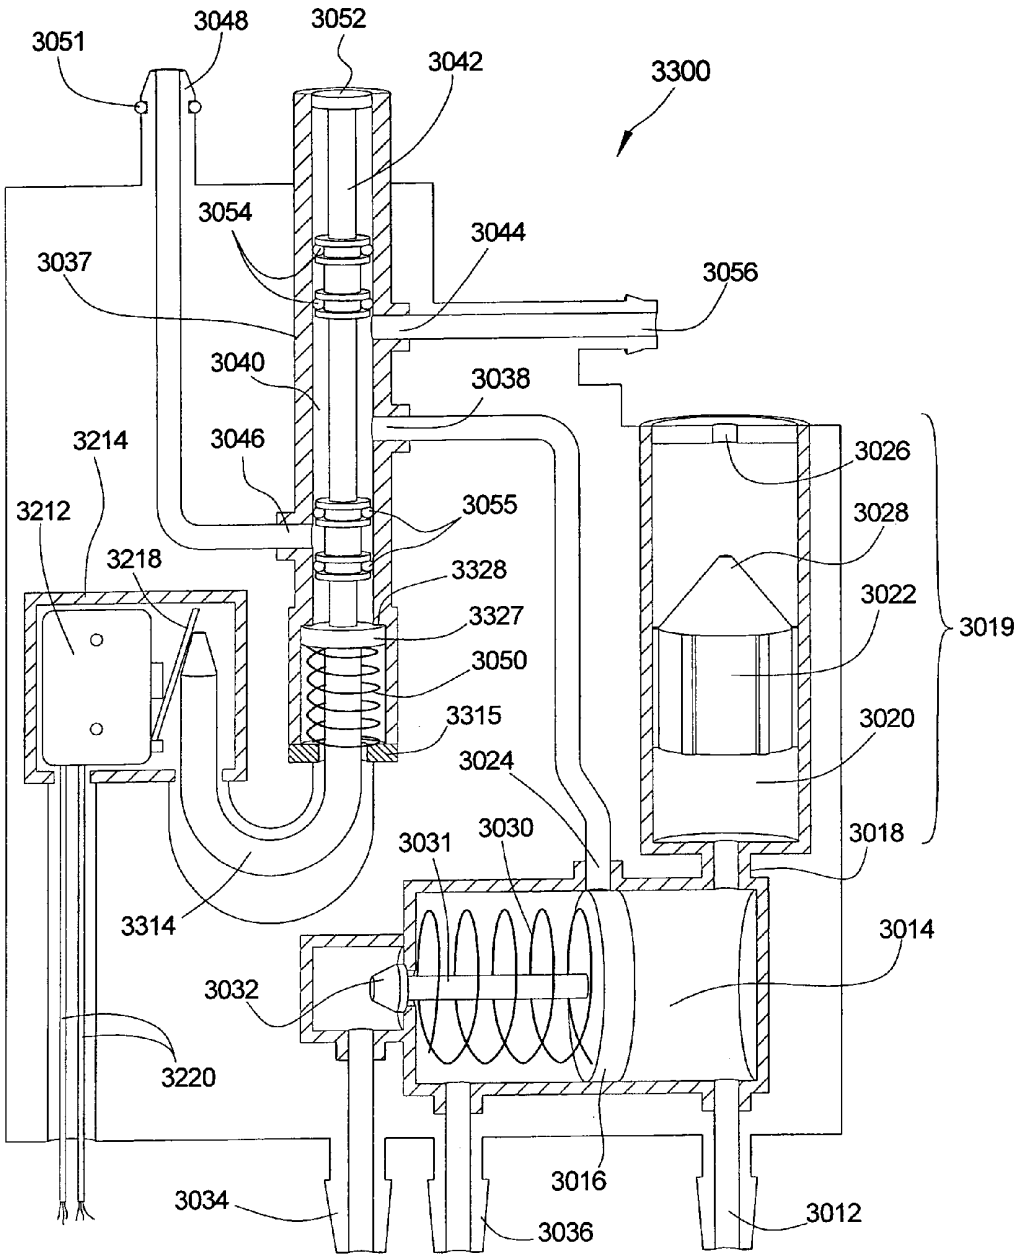
3051
3048
3052
3042
3300
3054
3044
3037
3056
3040
3038
3214
3046
3026
3212
3055
3028
3218
3328
3022
3019
3327
3050
3315
3020
3024
3031
3030
3018
3314
3014
3032
3220
3016
3034
3036
3012

FIG. 33B

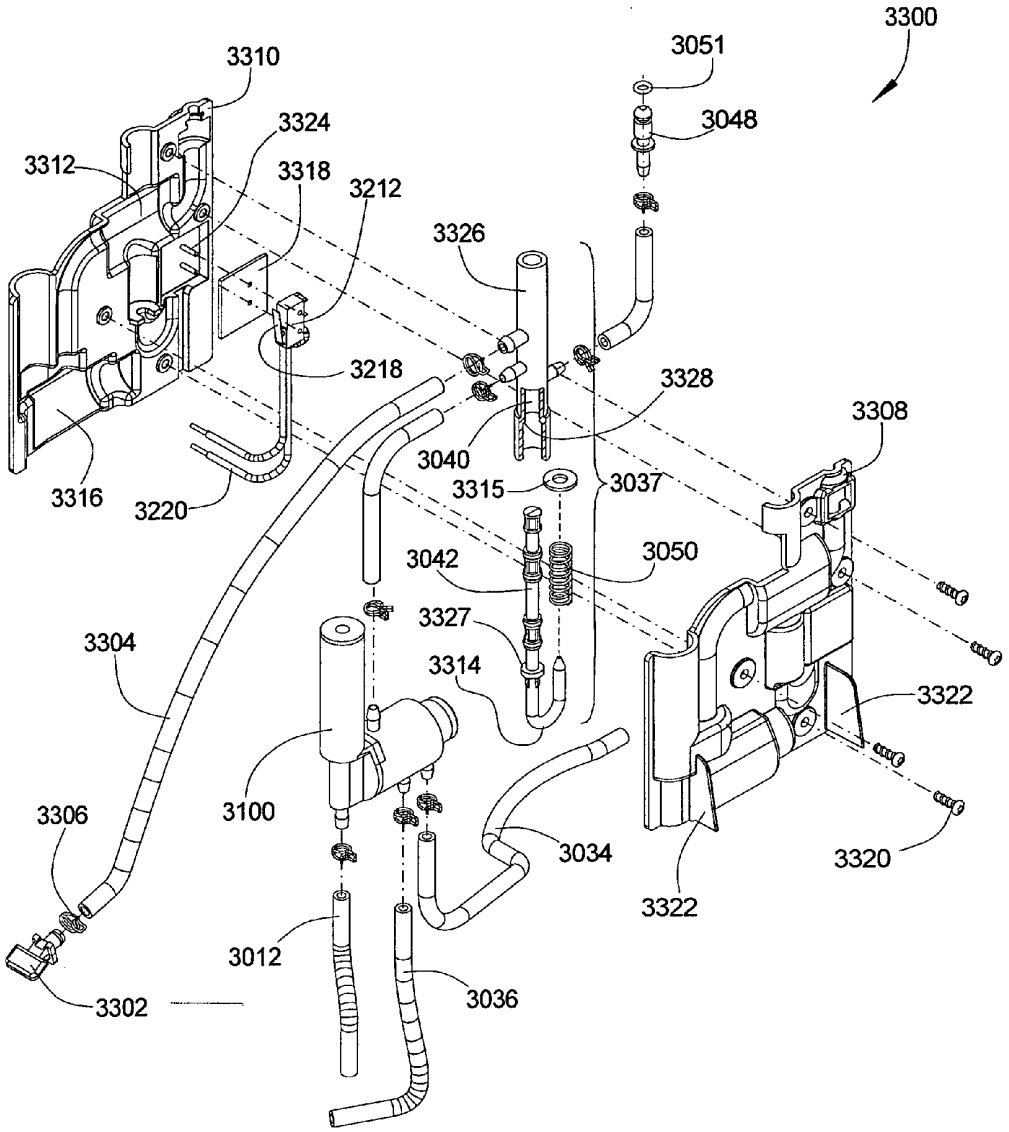
3300
3310
3051
3048
3324
3312
3318
3212
3326
3218
3328
3308
3040
3315
3037
3316
3220
3042
3050
3327
3304
3314
3322
3306
3100
3034
3320
3322
3012
3036
3302

FIG. 33C

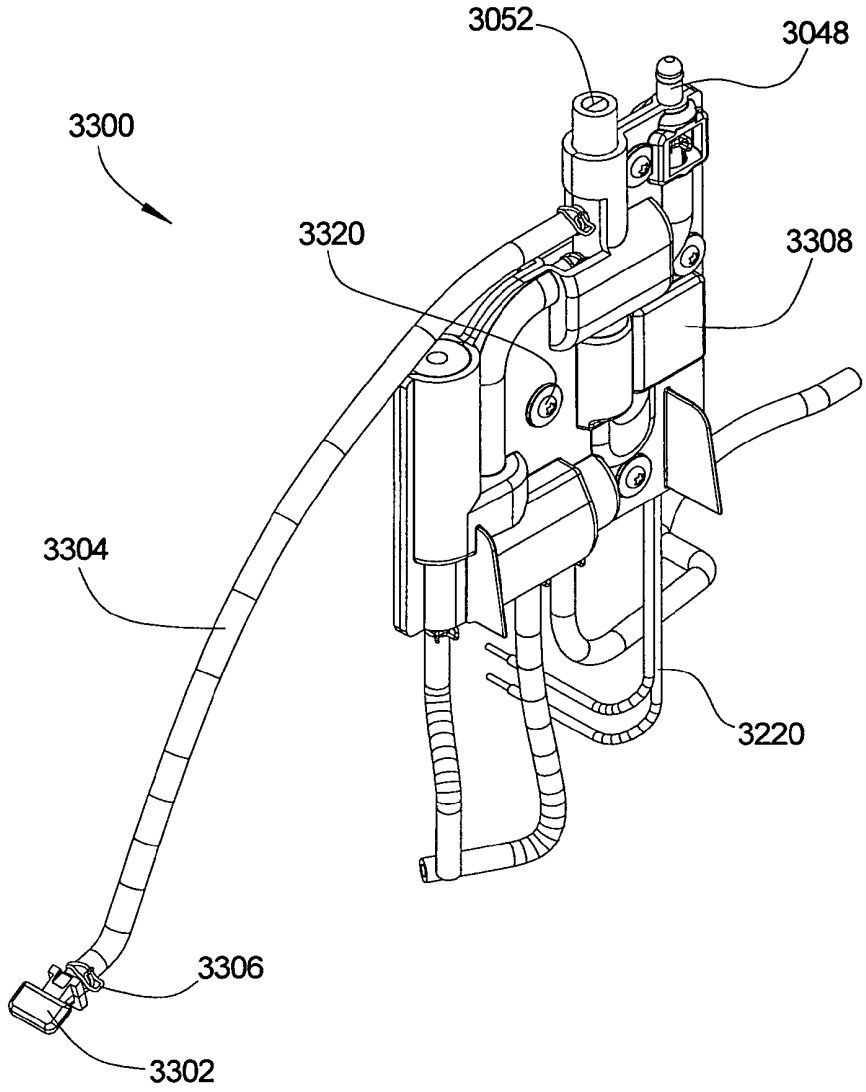

FIG. 33D

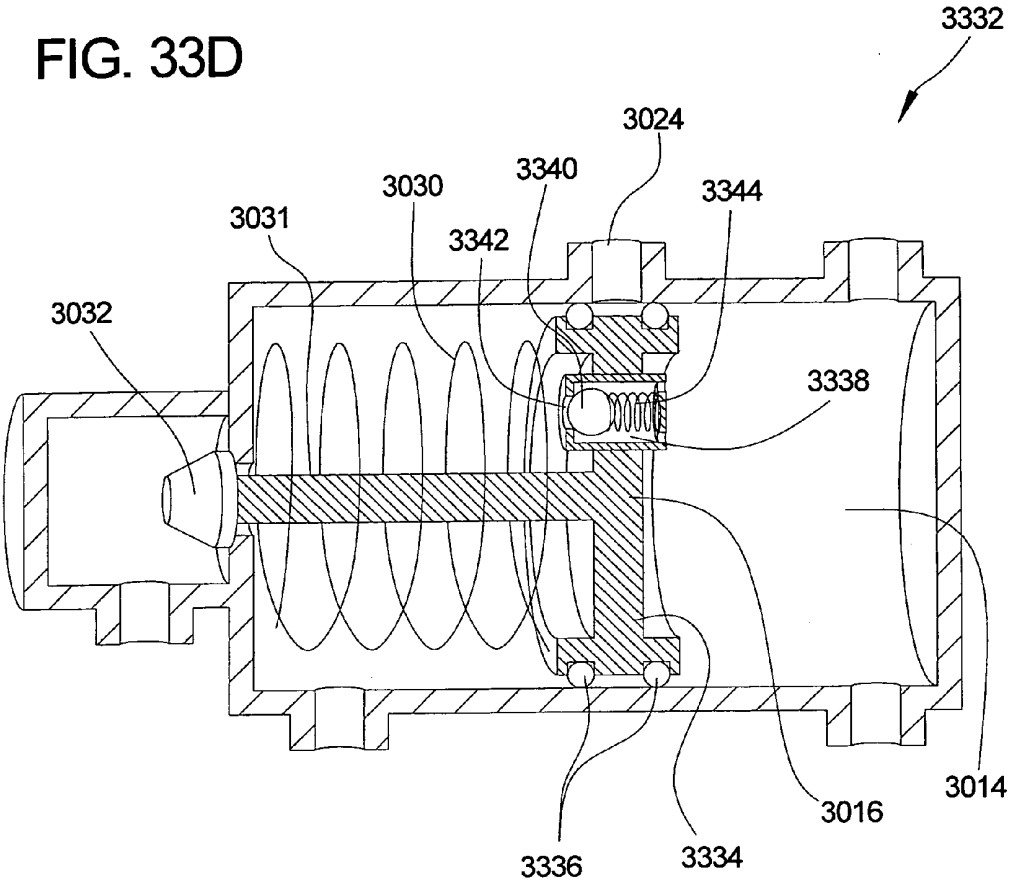

FIG. 30B

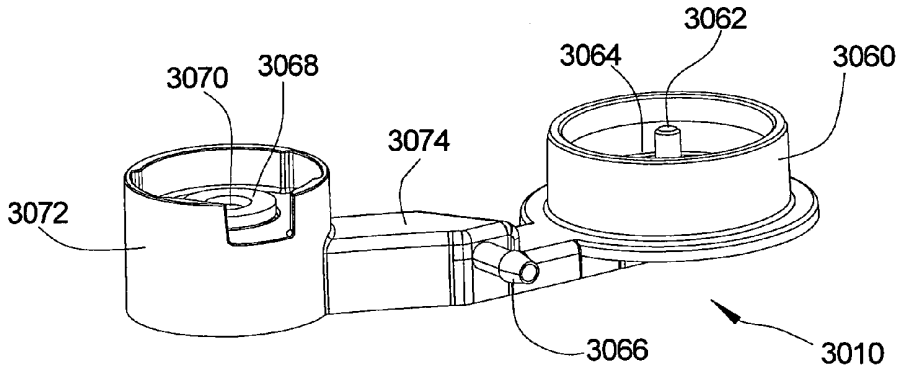

FIG. 34A

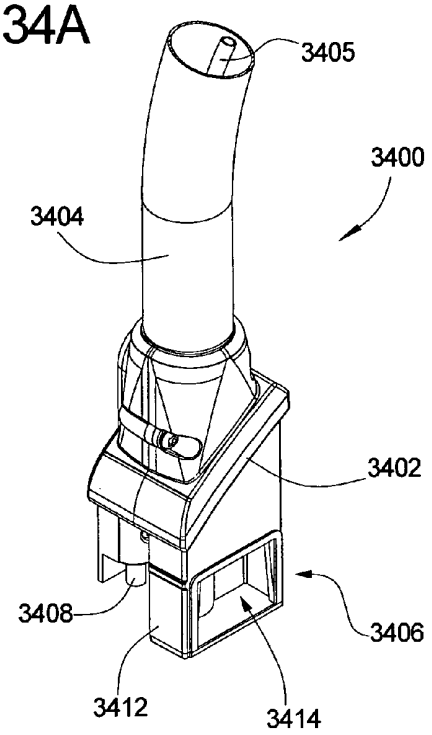

FIG. 34B

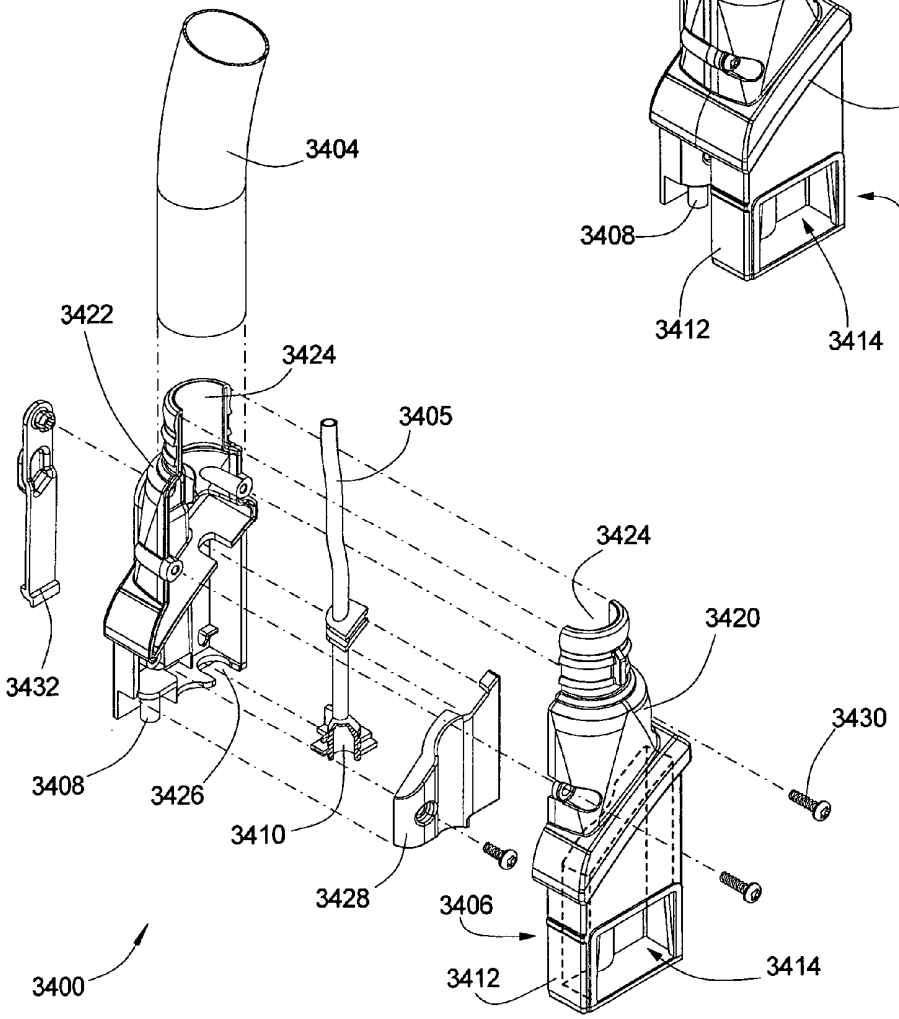

FIG. 35A

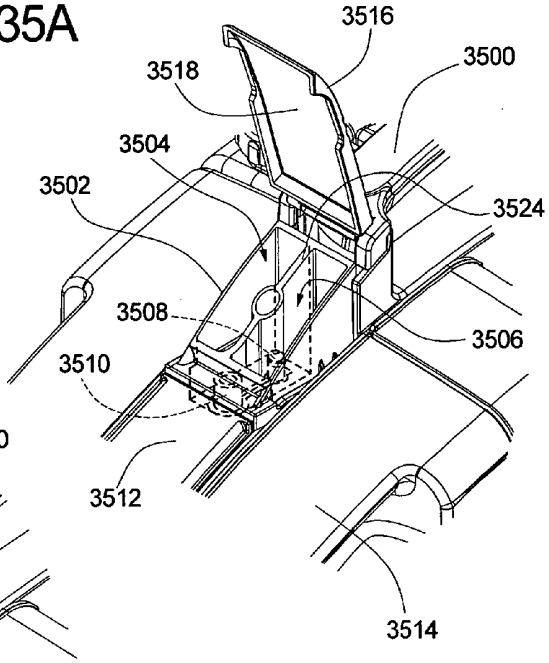

FIG. 35B

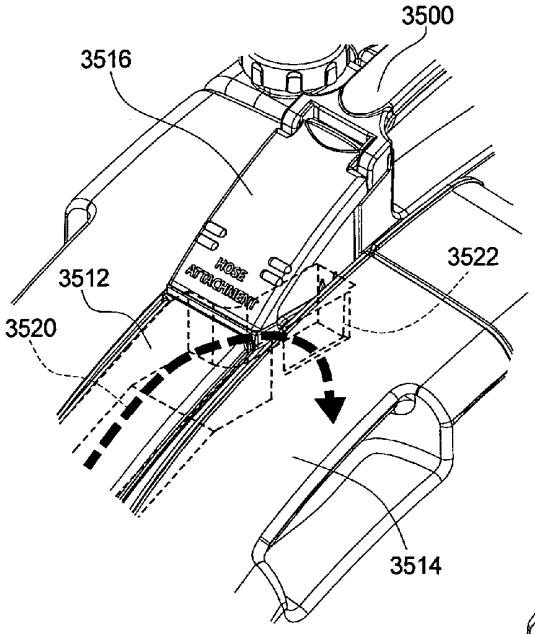

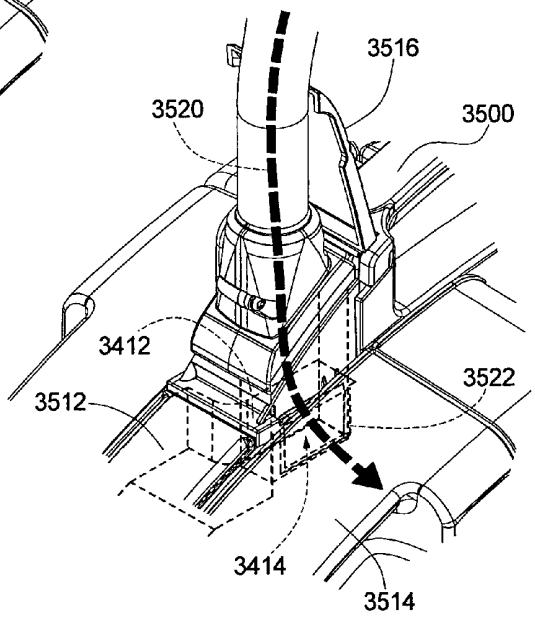

FIG. 35C

FIG. 36

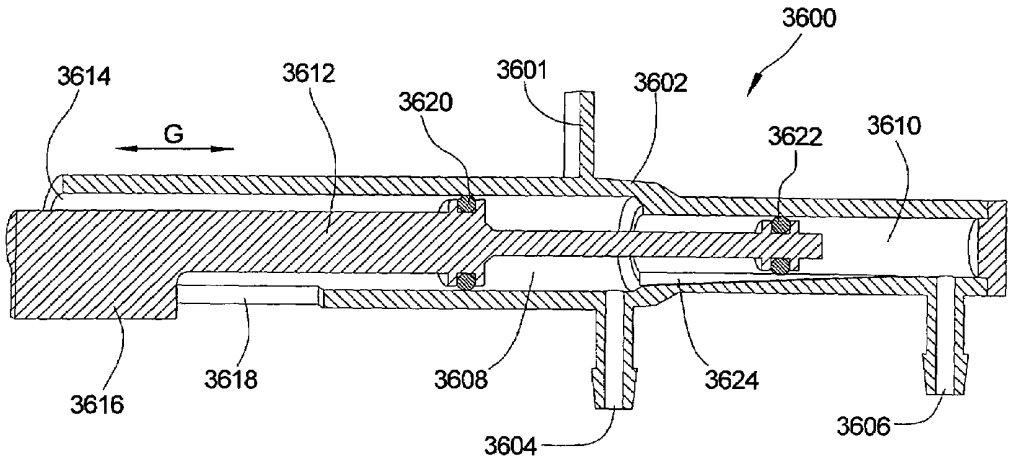
3600
3614
3612
3601
3602
3620
G
3622
3610
3616
3618
3608
3624
3606
3604

FIG. 37

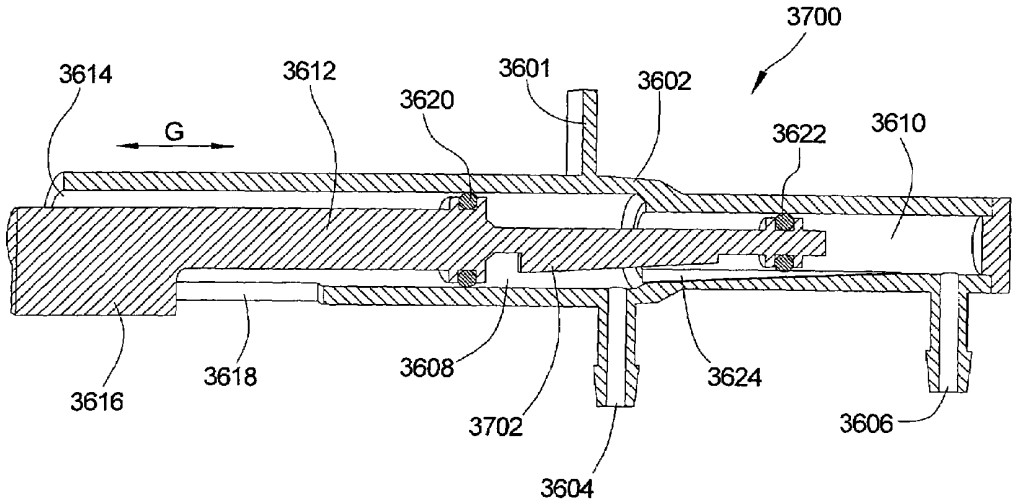
3700
3614
3612
3601
3602
3620
G
3622
3610
3616
3618
3608
3624
3606
3702
3604

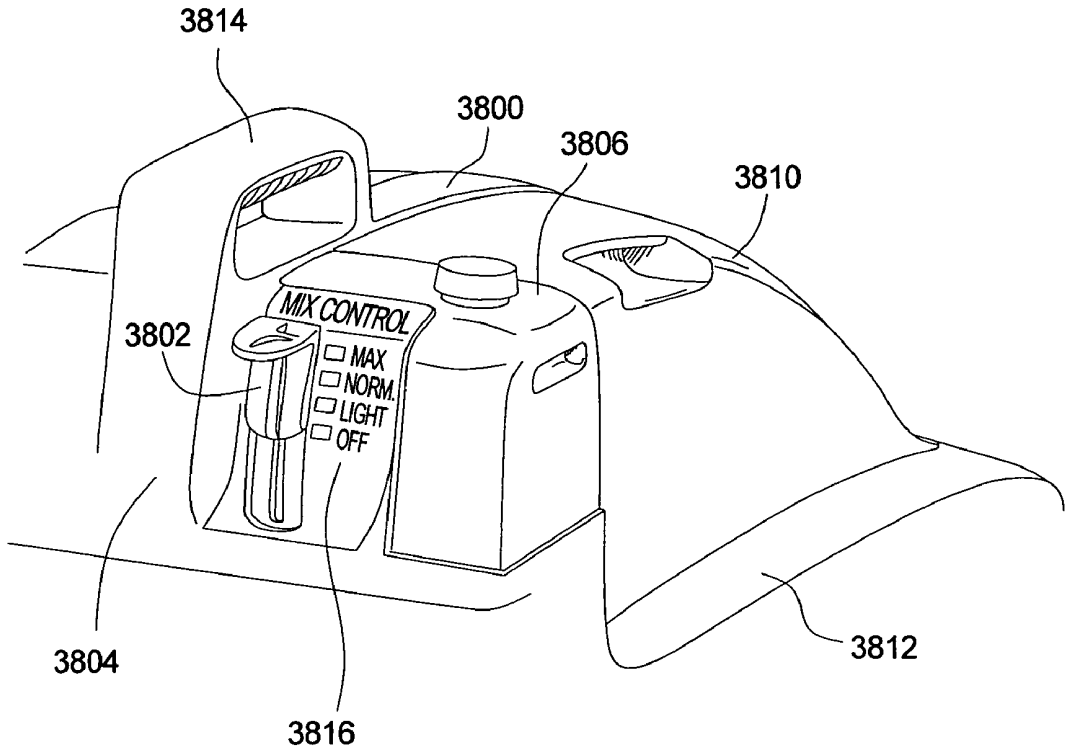
3814
3800
3806
3810
3802
MIX CONTROL
MAX
NORM.
LIGHT
OFF
3804
3816
3812

FIG. 38

FIG. 39A

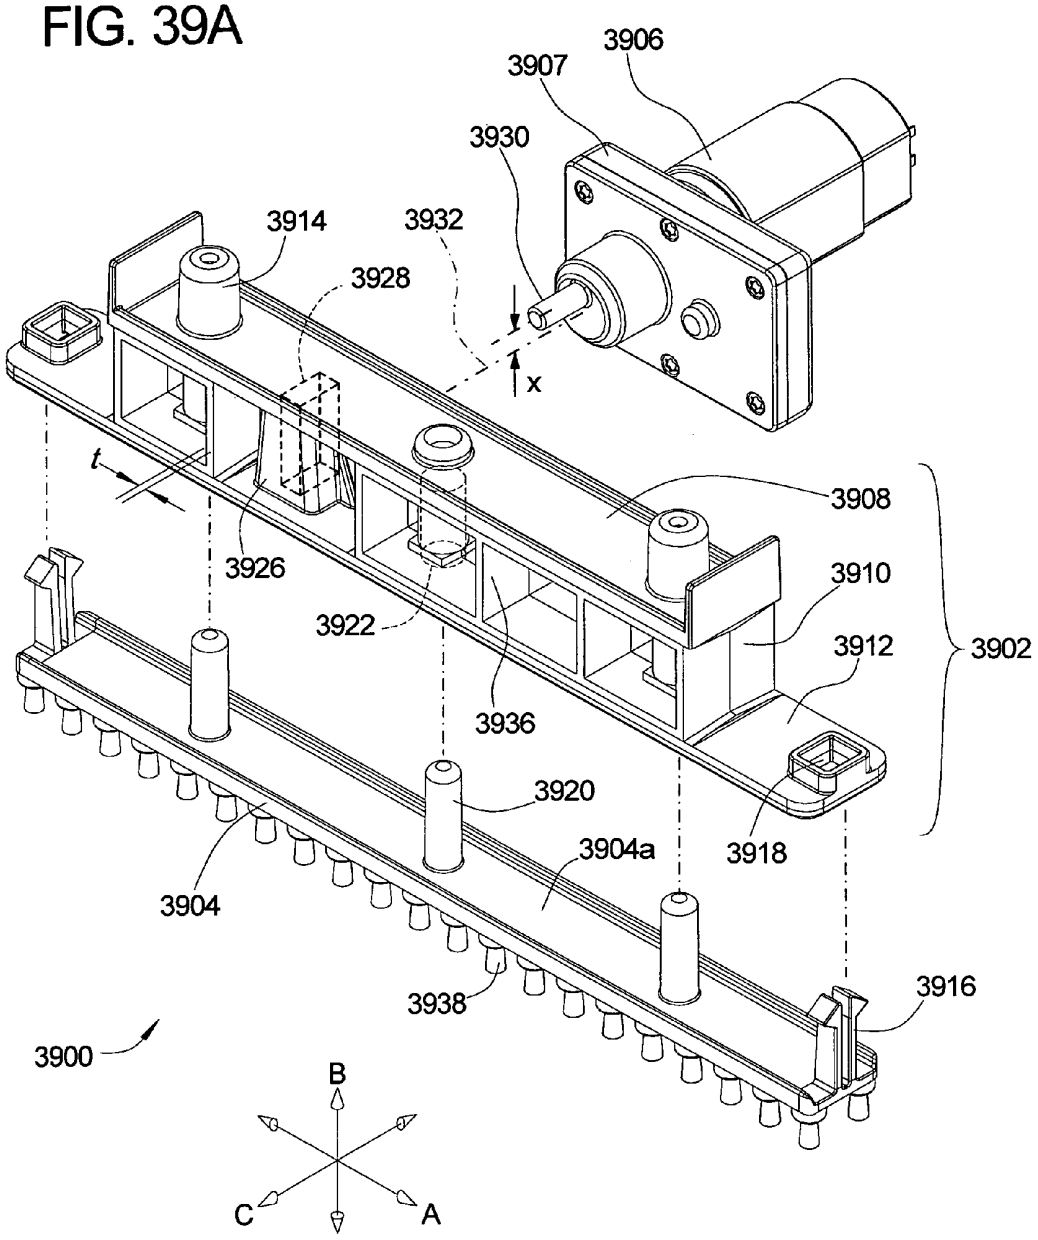
3906
3907
3930
3914
3932
3928
x
t
3908
3926
3910
3922
3912
3902
3936
3920
3904a
3918
3904
3916
3938
3900
B
C
A

FIG. 39B

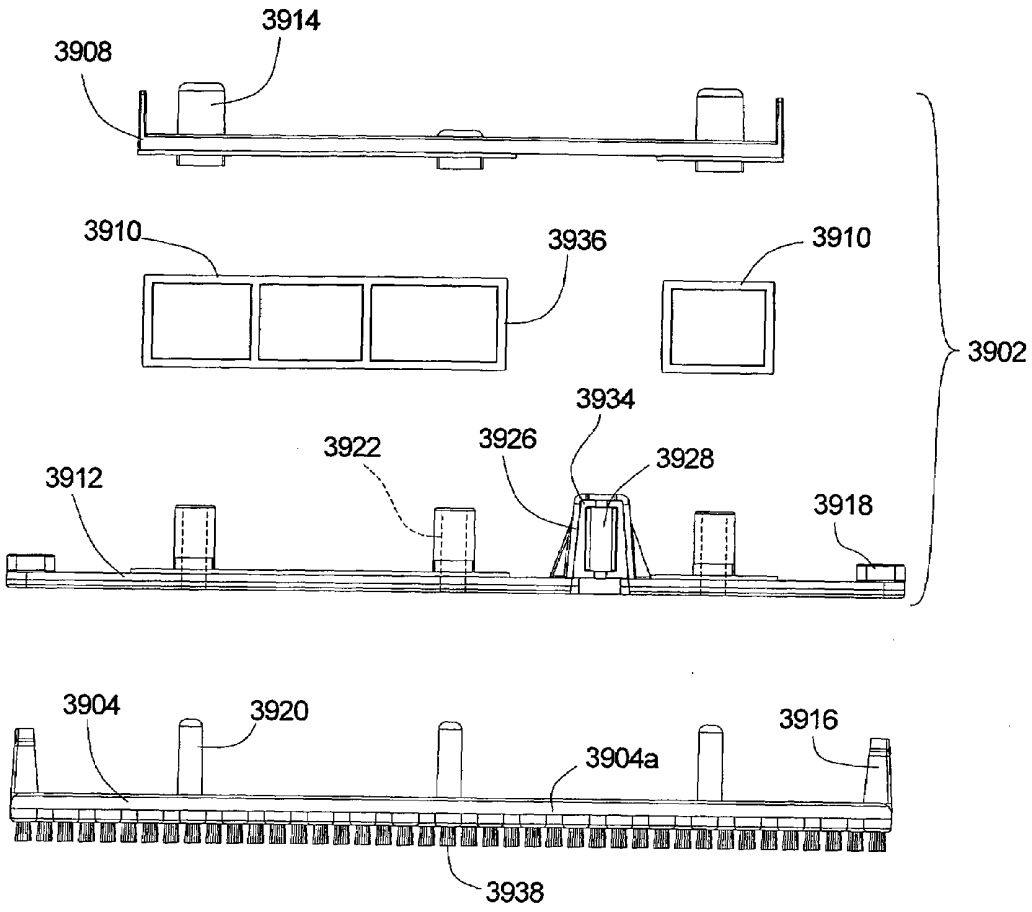
3914
3908
3910
3936
3910
3902
3934
3922
3926
3928
3912
3918
3904
3920
3916
3904a
3938

FIG. 39C

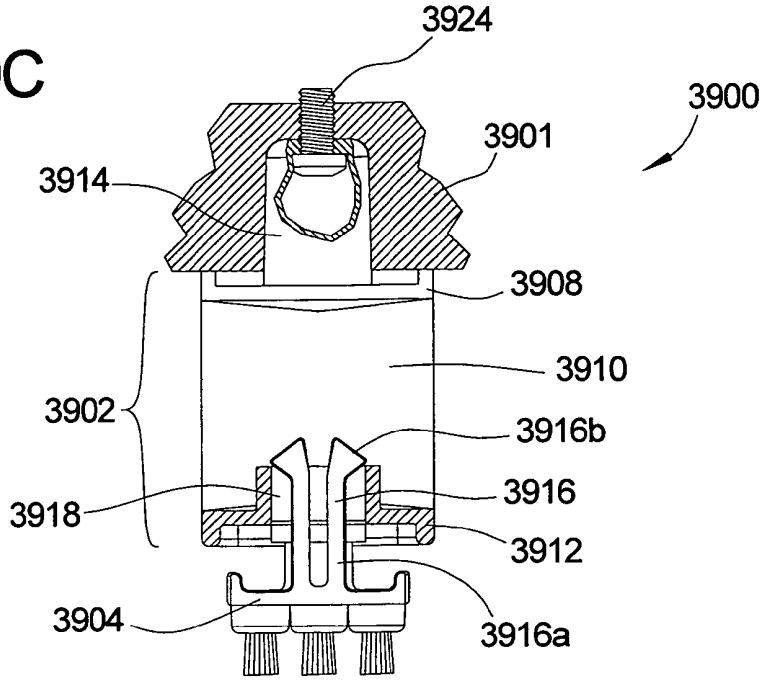

FIG. 39D

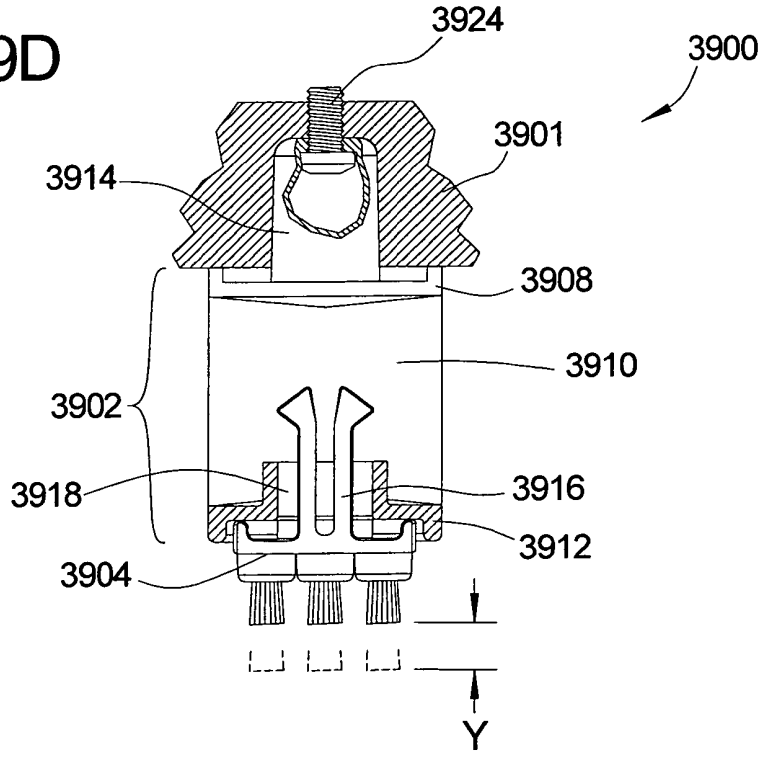

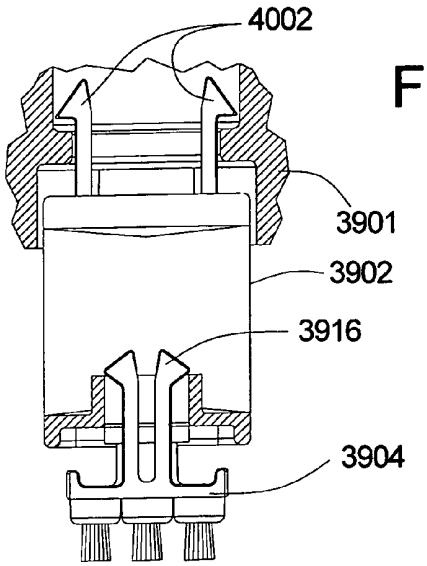

FIG. 40A

FIG. 40B

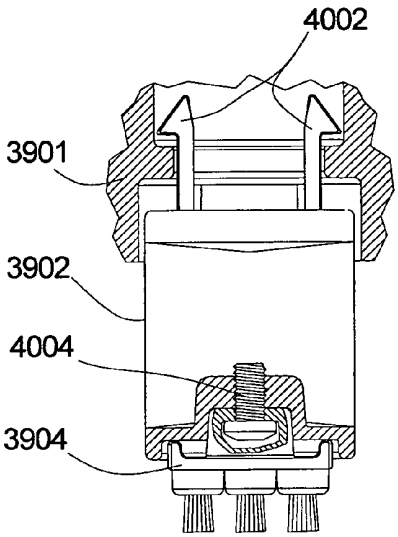

FIG. 40C

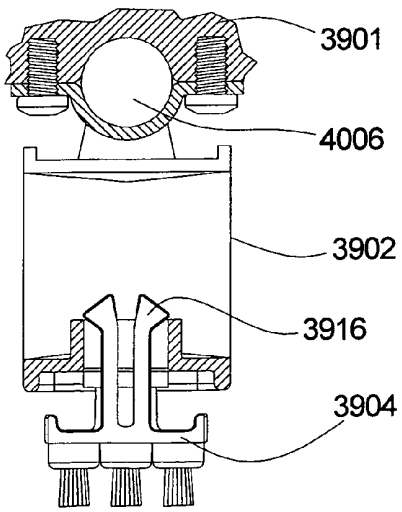

FIG. 41A

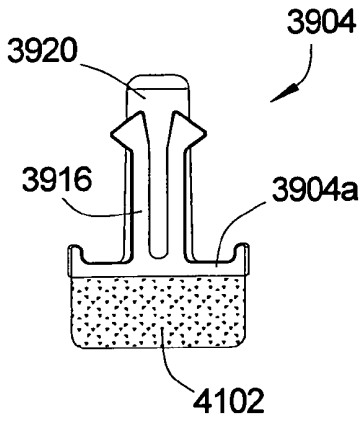

FIG. 41B

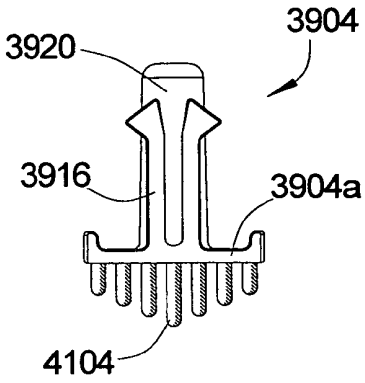

FIG. 41C

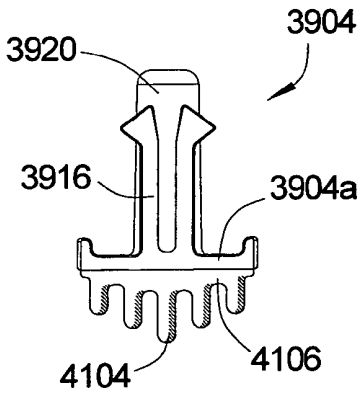

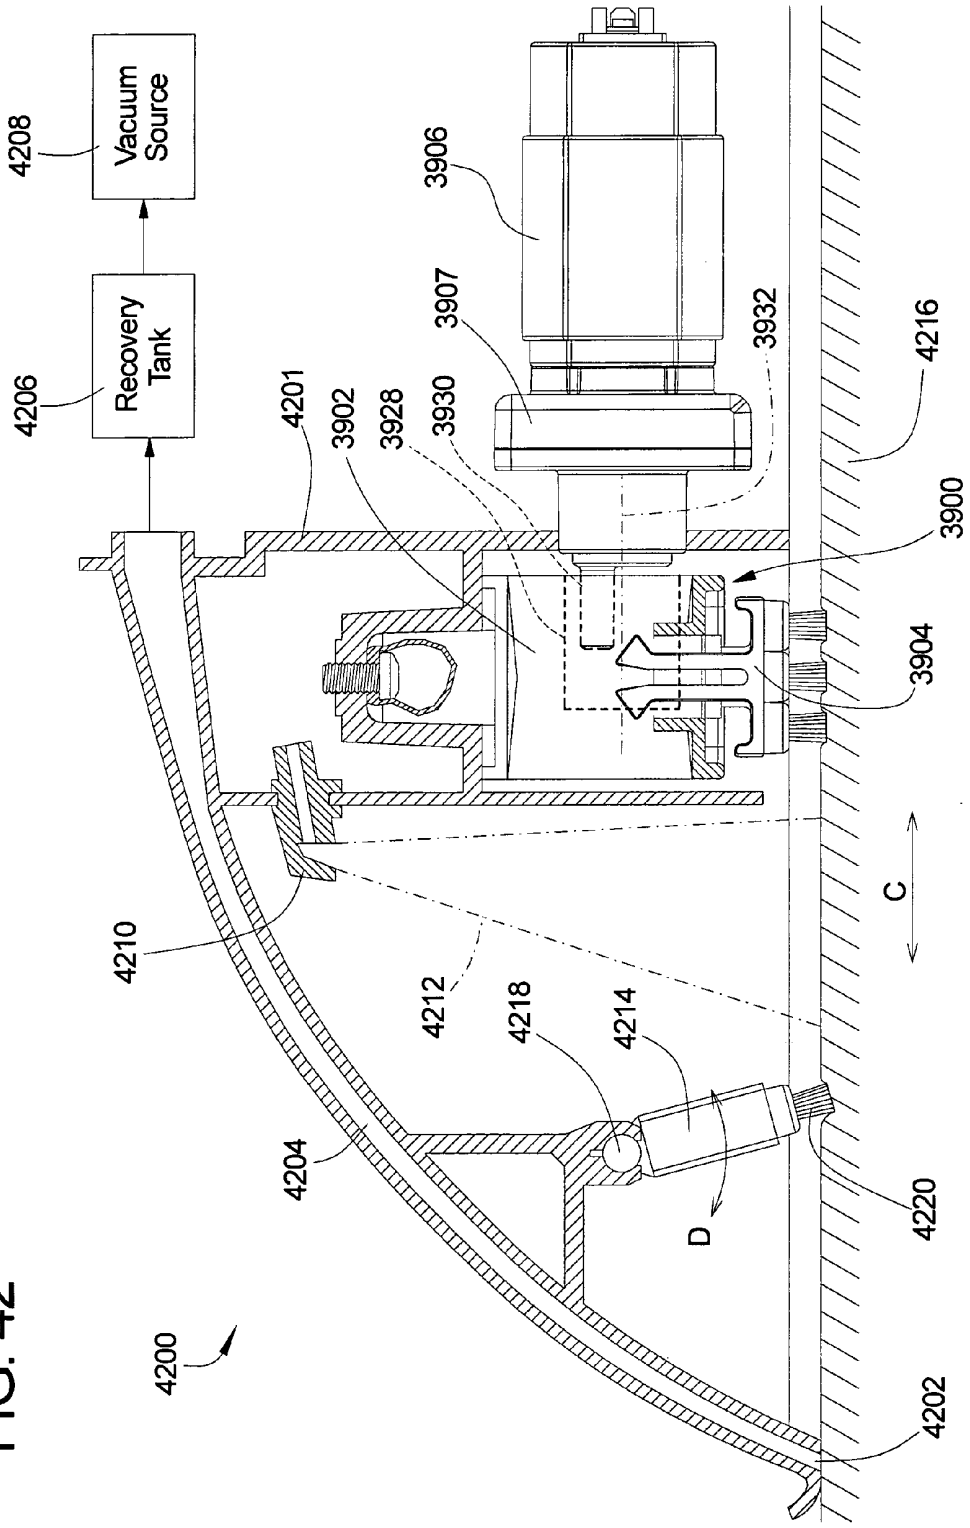
4208
Vacuum Source
4206
Recovery Tank
4201
3902
3928
3930
3906
3907
3932
4216
3900
3904
C
4210
4212
4218
4214
4204
D
4220
4200
4202

FIG. 42

FIG. 43A

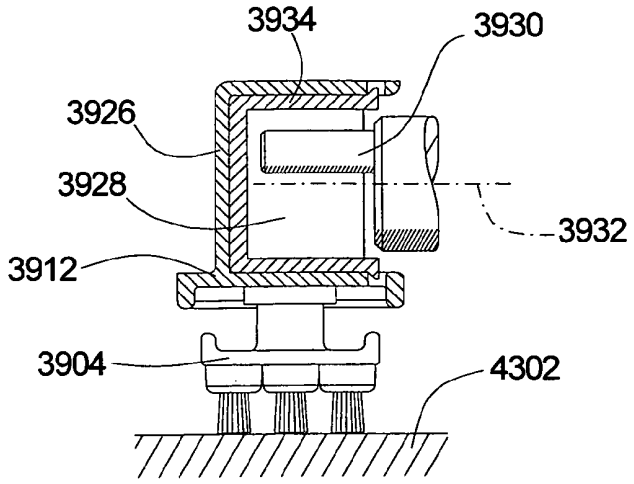

FIG. 43B

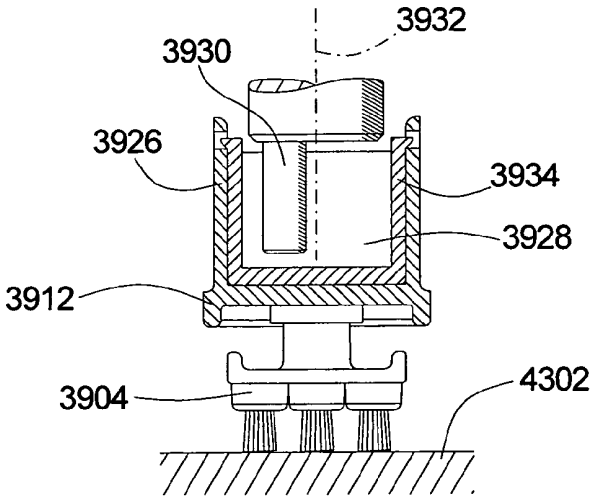

FIG. 43C

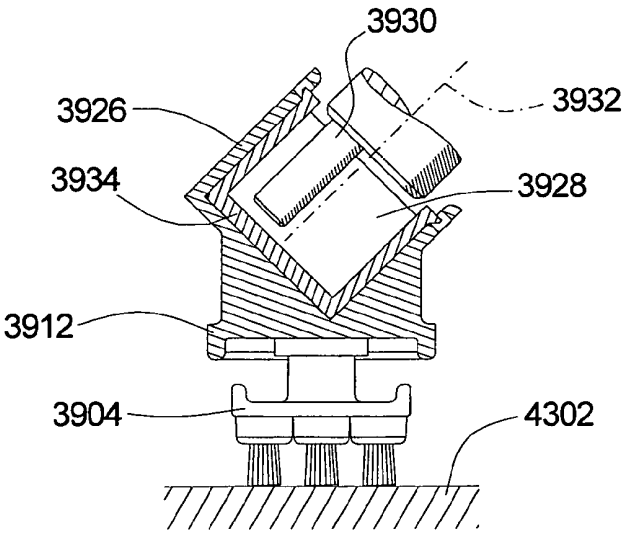

FIG. 44A

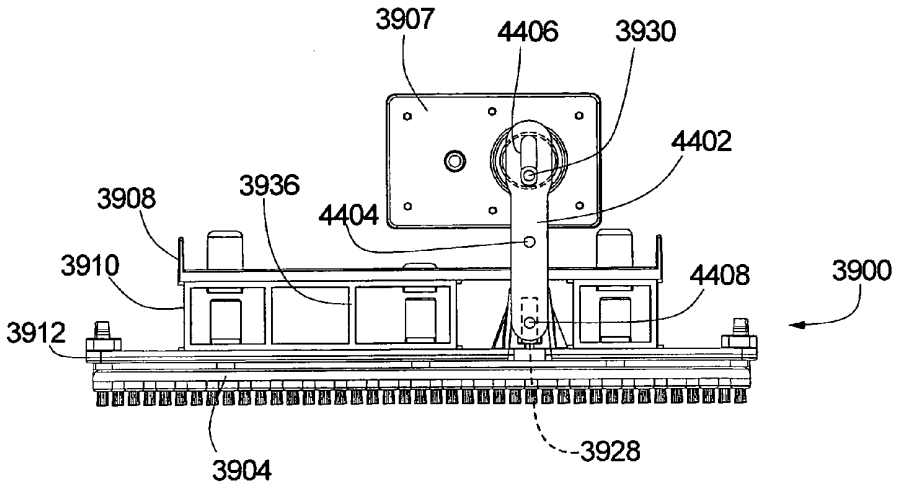

FIG. 44B

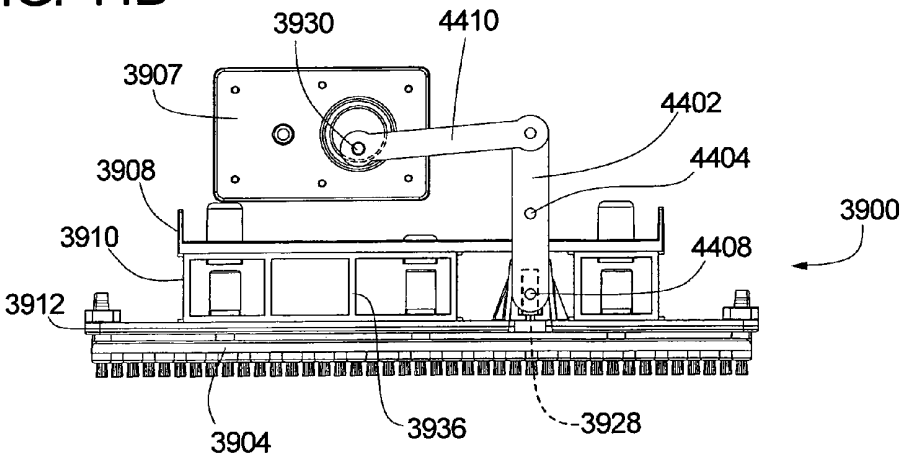

FIG. 44C

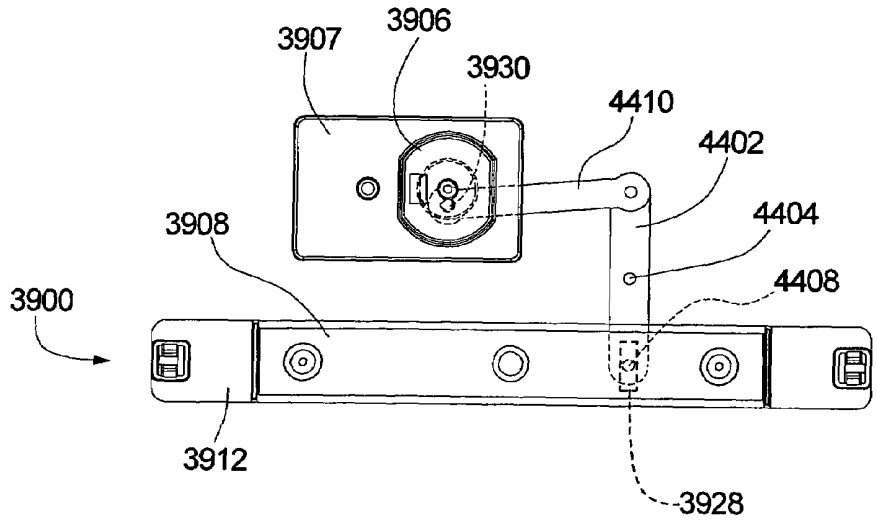

FIG. 44D

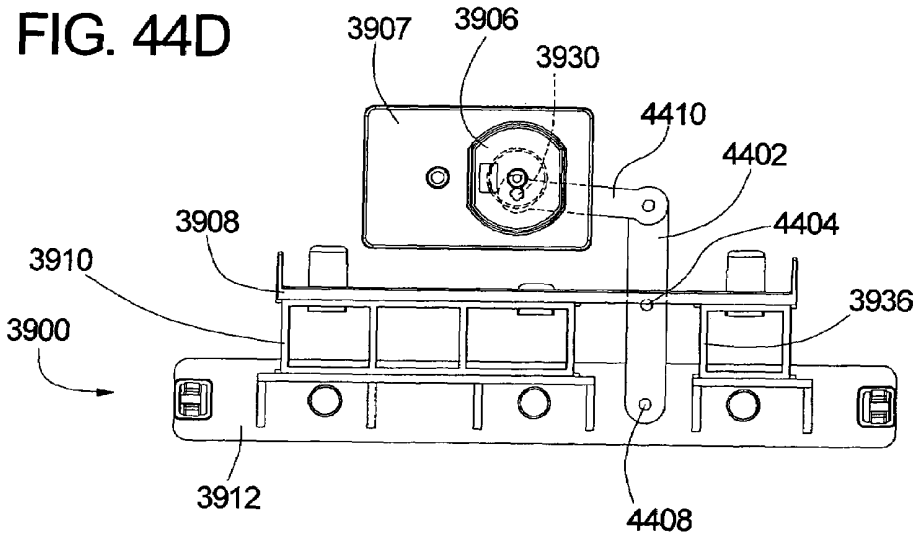

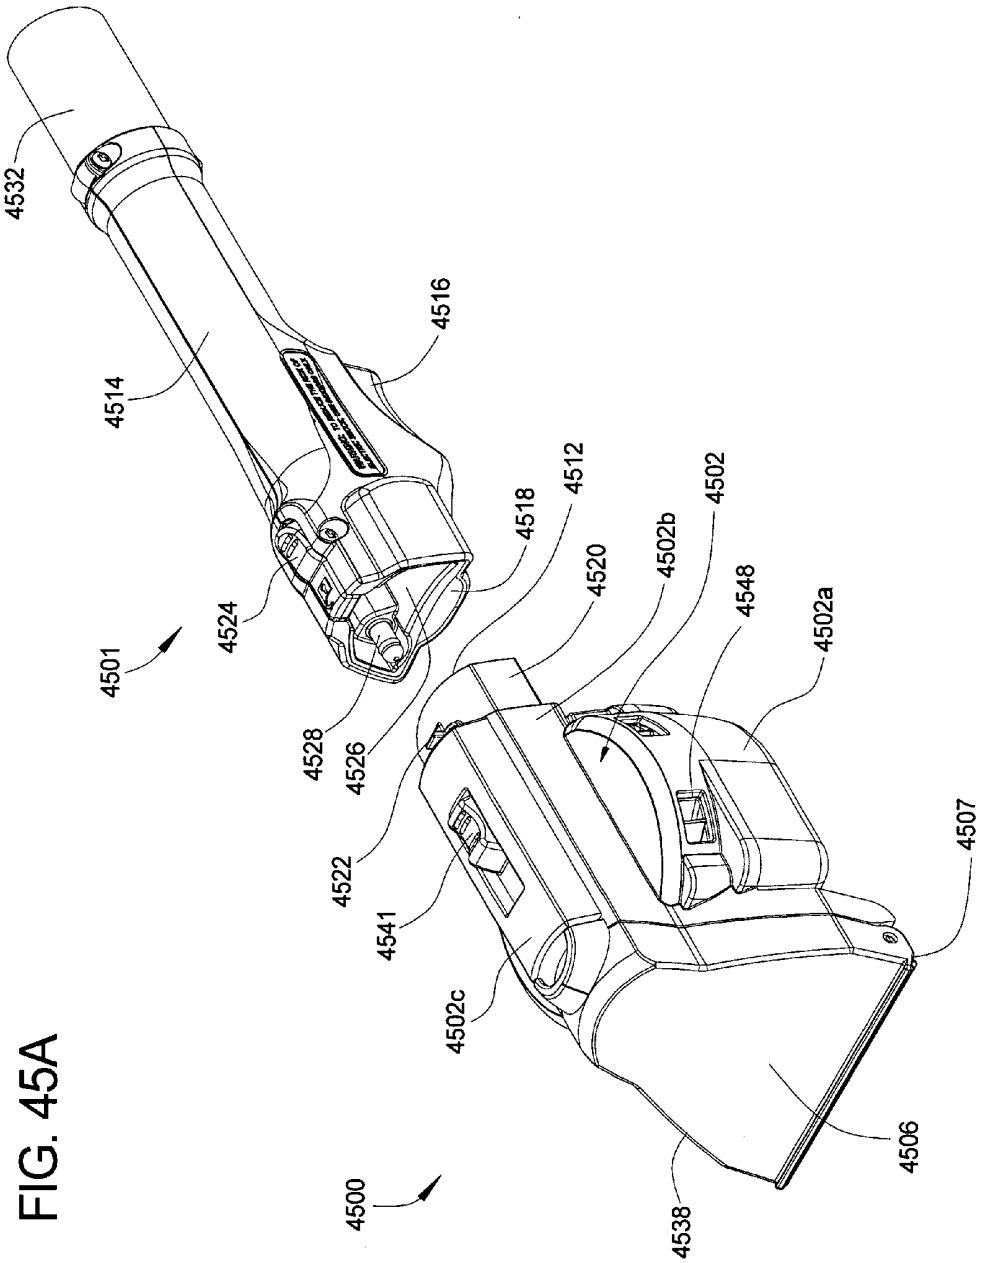
4532
4516
4514
4512
4518
4502
4502b
4520
4548
4502a
4524
4501
4528
4526
4522
4541
4507
4502c
4506
4538
4500

FIG. 45A

FIG. 45B

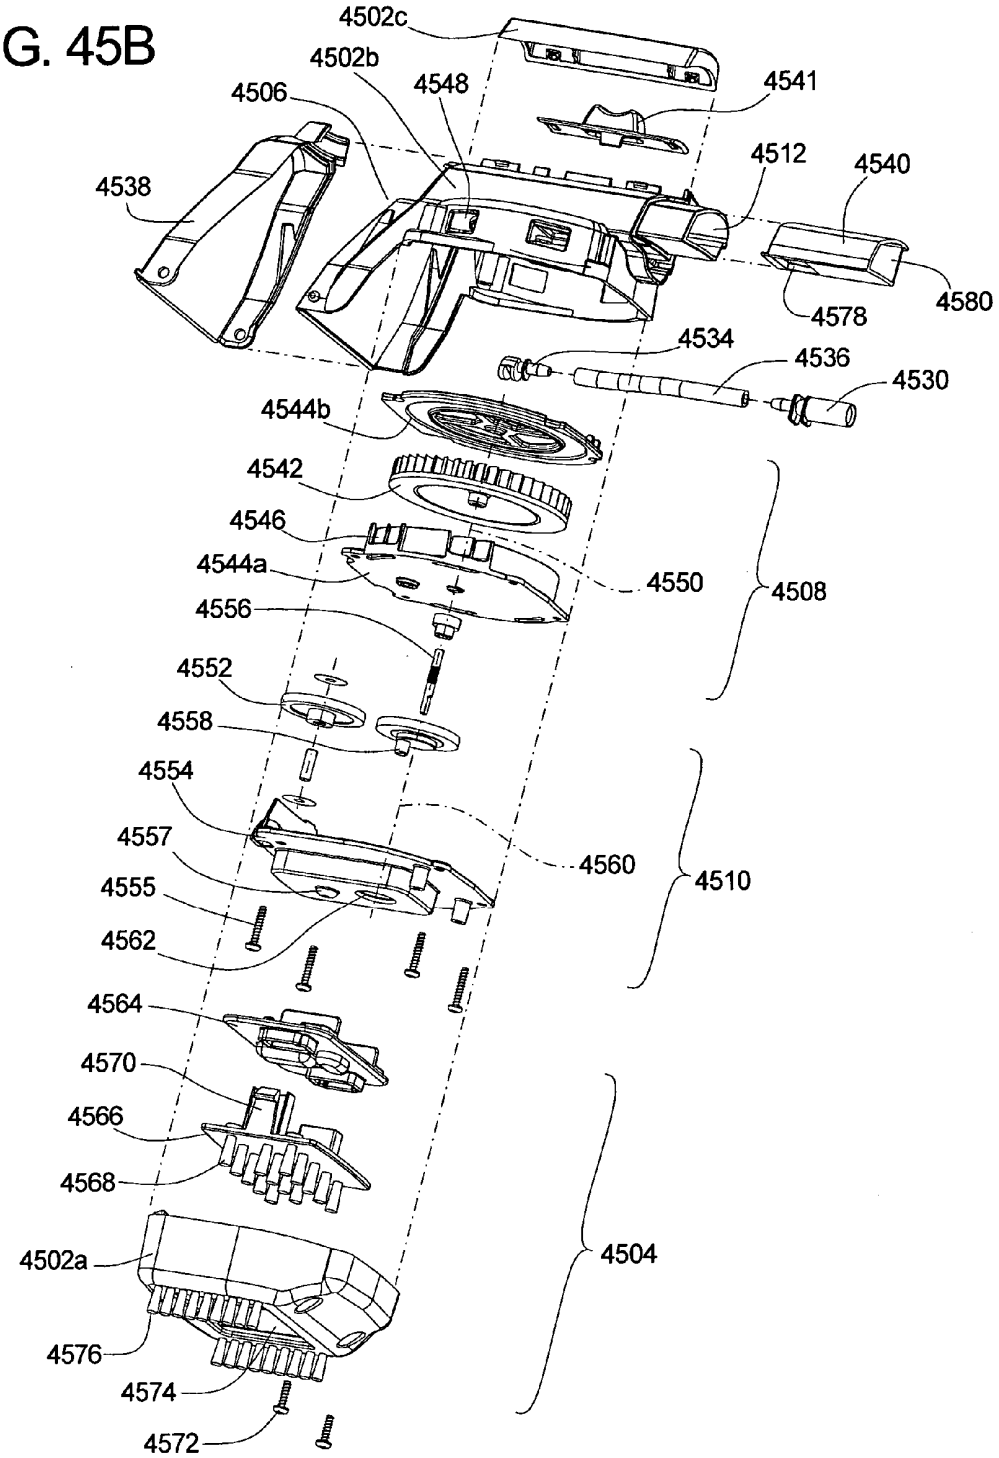
4502c
4502b
4548
4506
4541
4538
4512
4540
4578
4580
4534
4536
4530
4544b
4542
4546
4544a
4550
4508
4556
4552
4558
4554
4557
4560
4555
4510
4562
4564
4570
4566
4568
4502a
4504
4576
4574
4572

FIG. 46

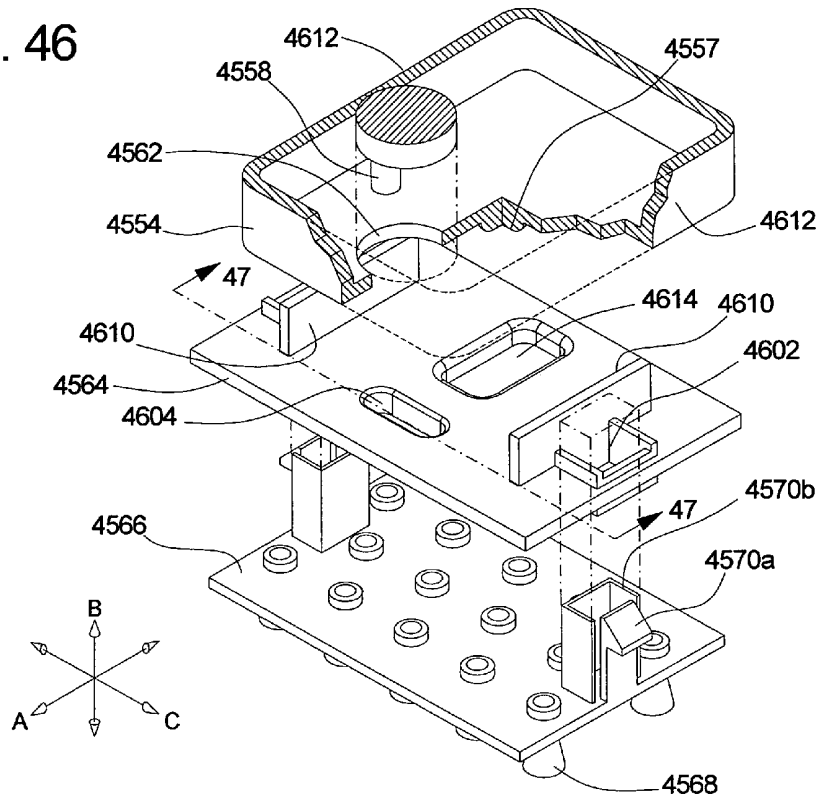
4612
4557
4558
4562
4554
4612
47
4614
4610
4610
4602
4564
4604
4570b
47
4566
4570a
B
A
C
4568

FIG. 47

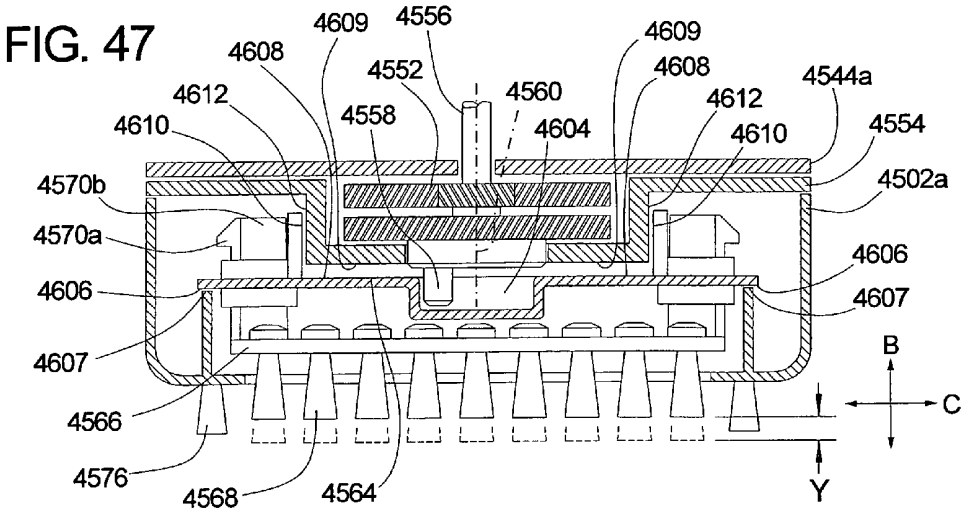
4609
4556
4608
4609
4552
4608
4544a
4612
4560
4612
4610
4558
4604
4610
4554
4570b
4502a
4570a
4606
4606
4607
4607
B
C
4566
Y
4576
4568
4564

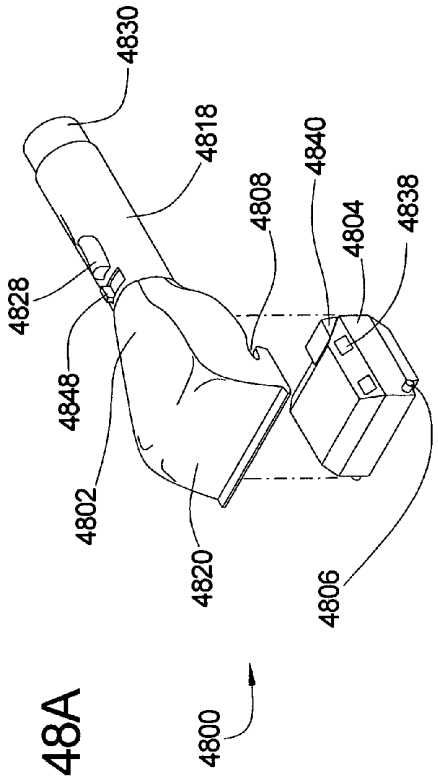

FIG. 48A

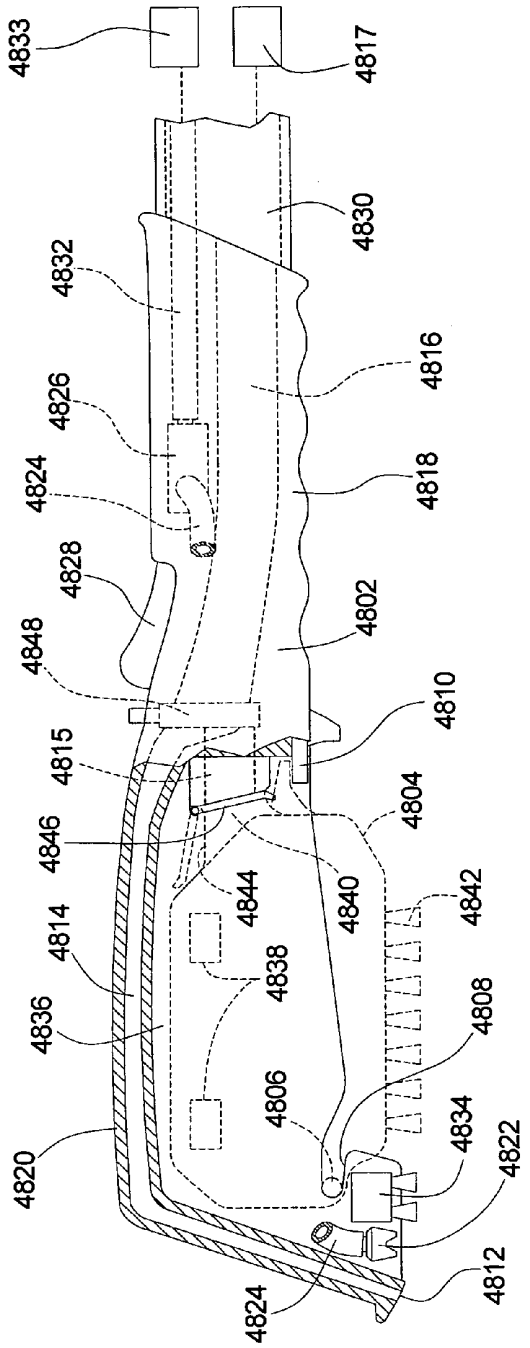

FIG. 48B

FIG. 49A

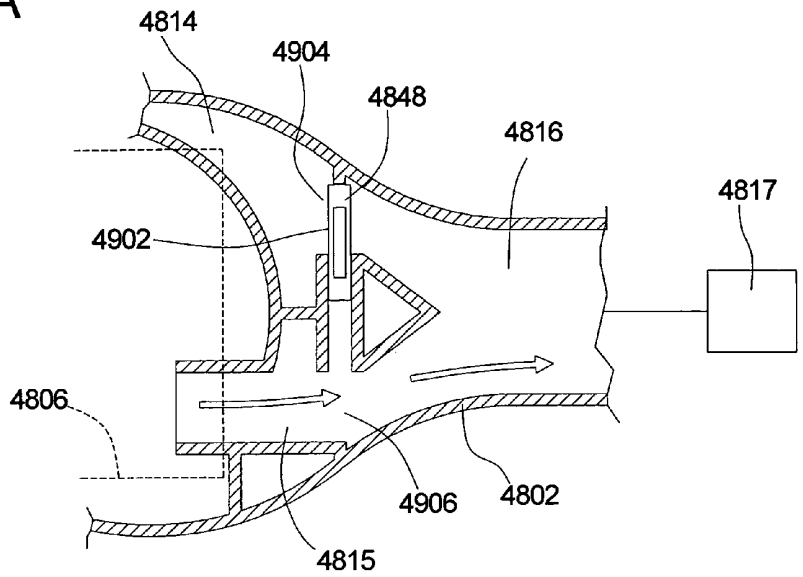

FIG. 49B

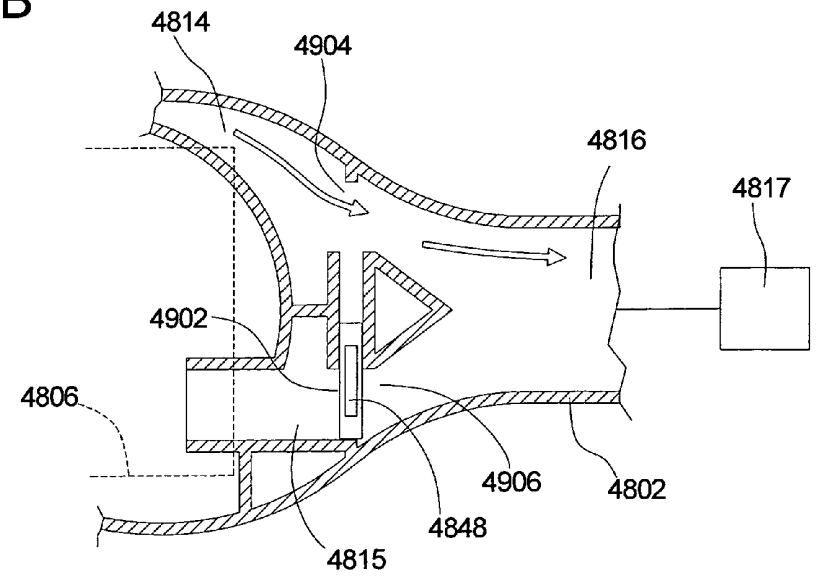

FIG. 50A

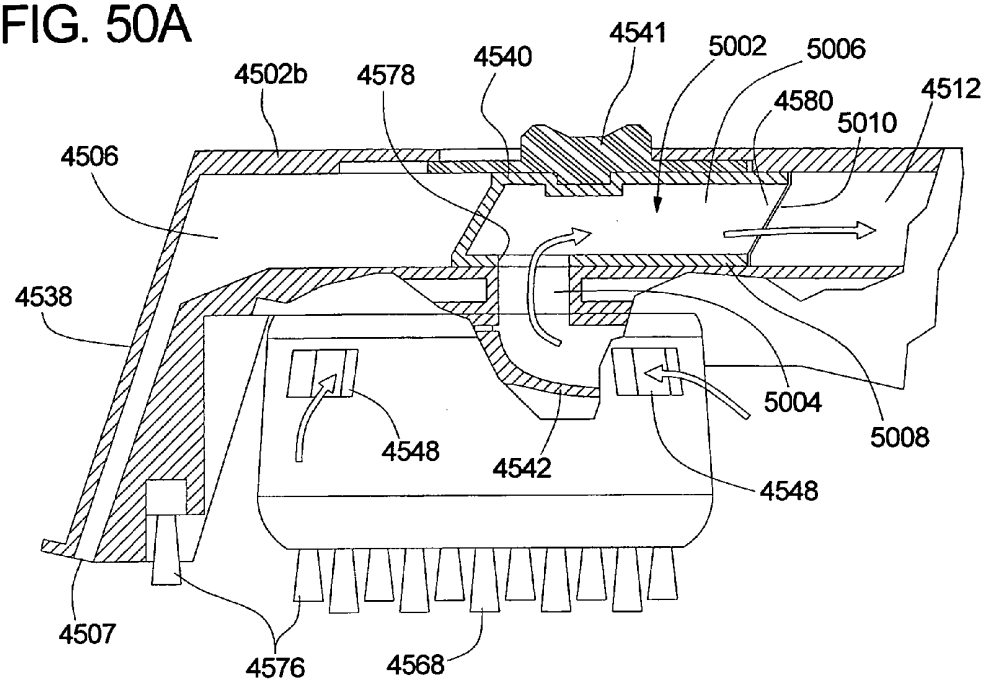

FIG. 50B

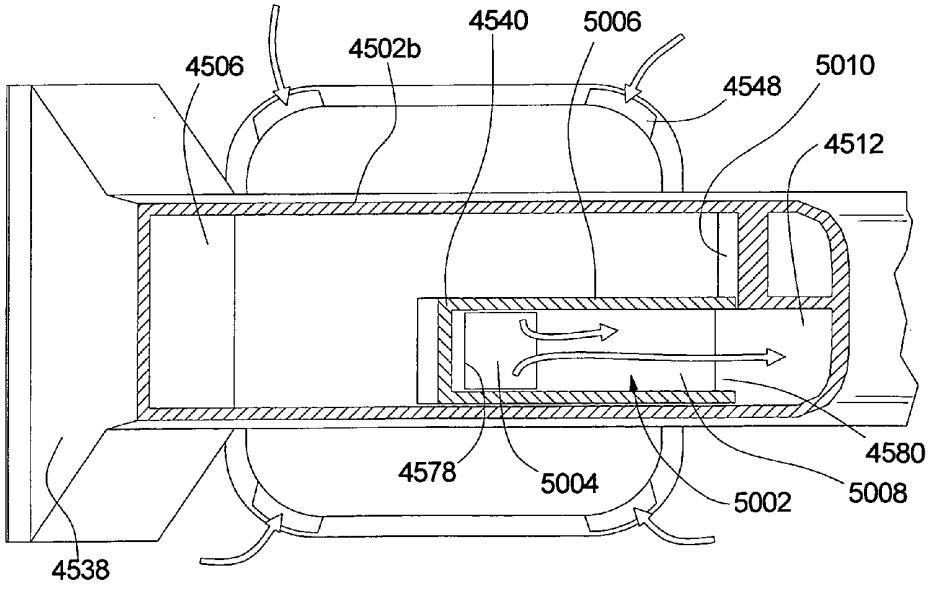

FIG. 50C

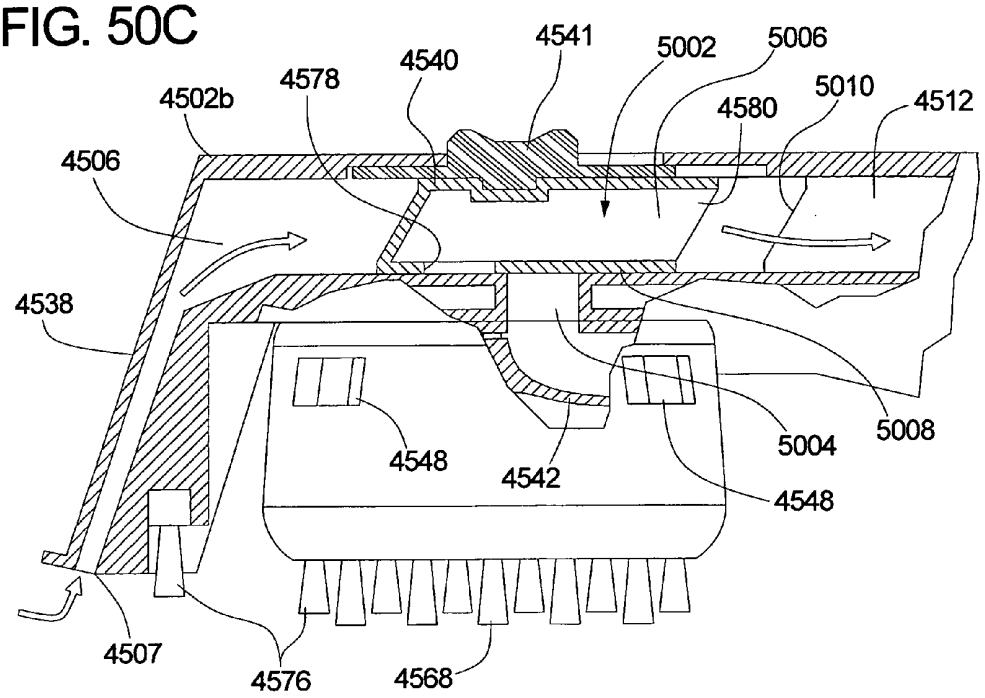

FIG. 50D

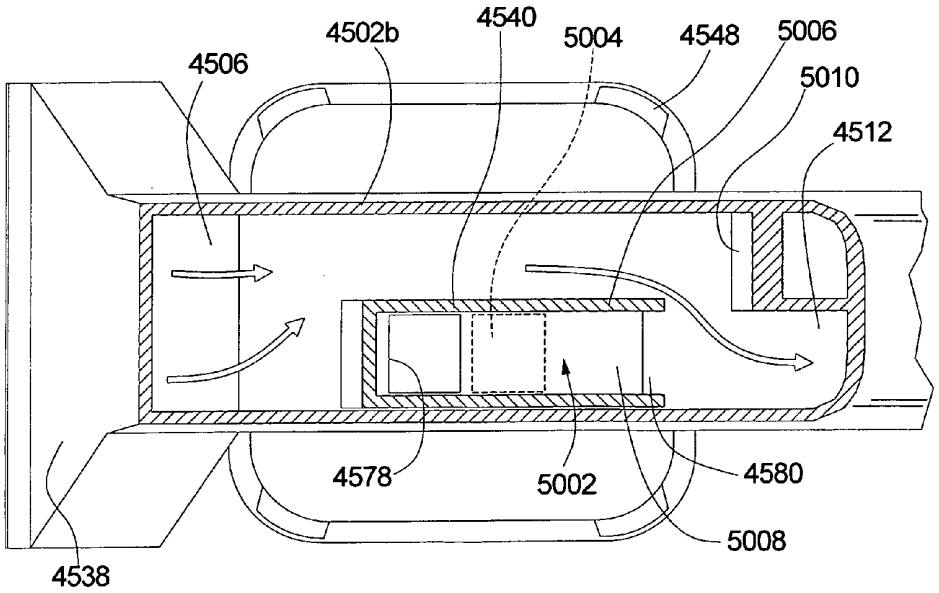

FIG. 51A

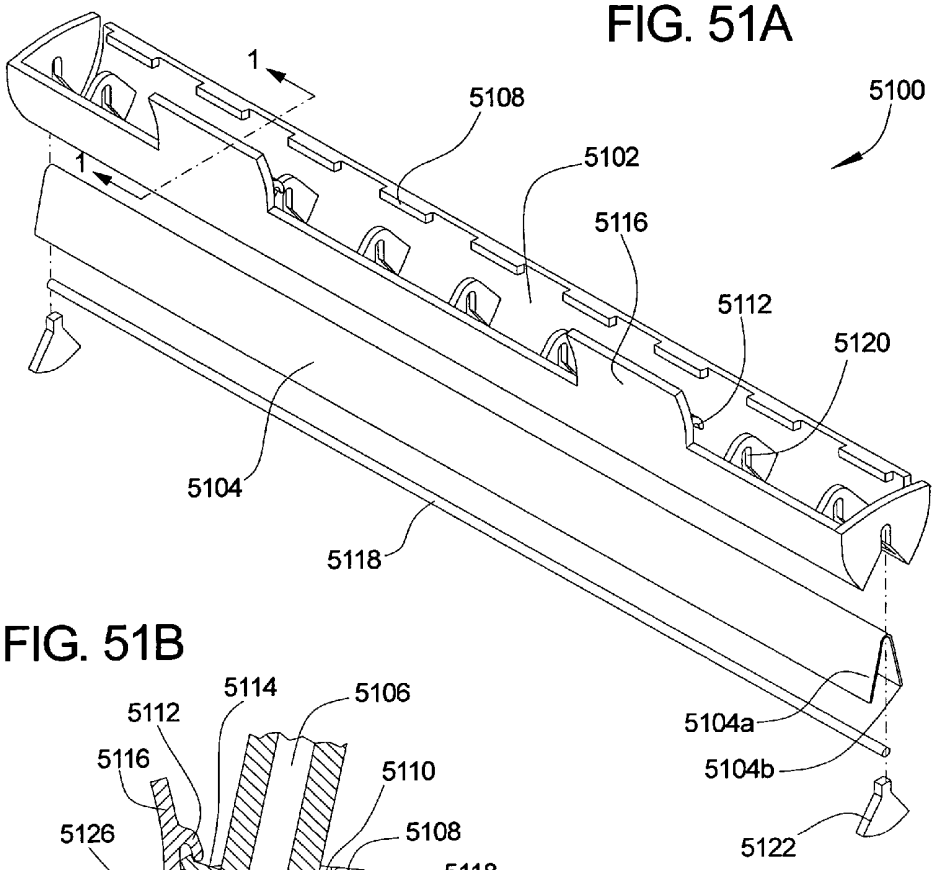

FIG. 51B

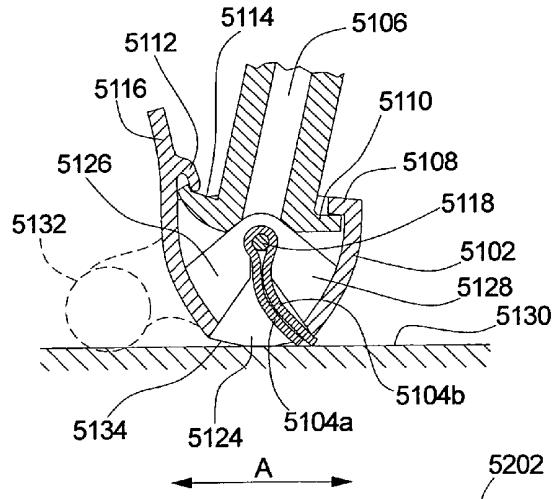

FIG. 52

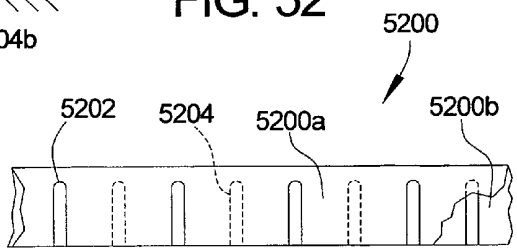

FIG. 53

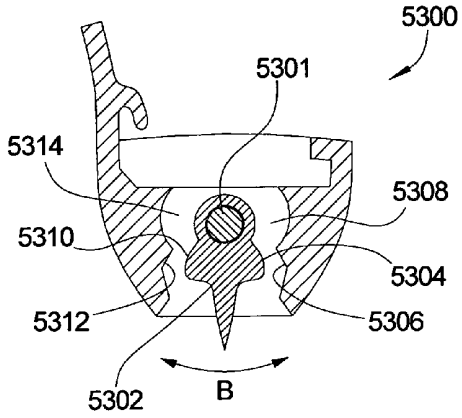

FIG. 54

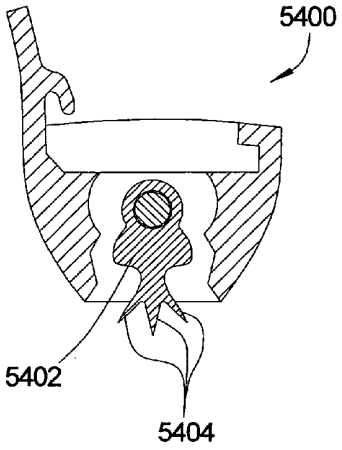

FIG. 55

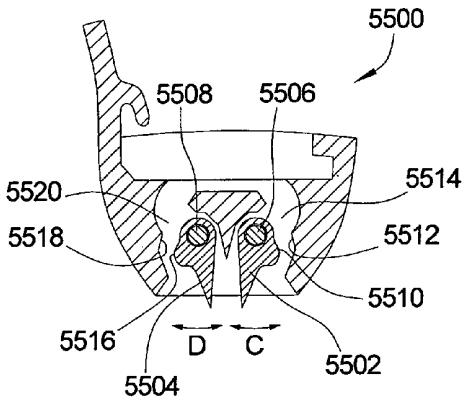

FIG. 56

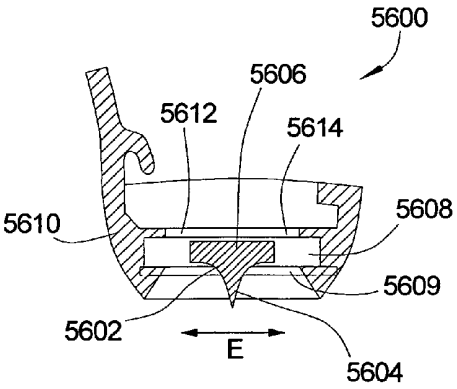

FIG. 57

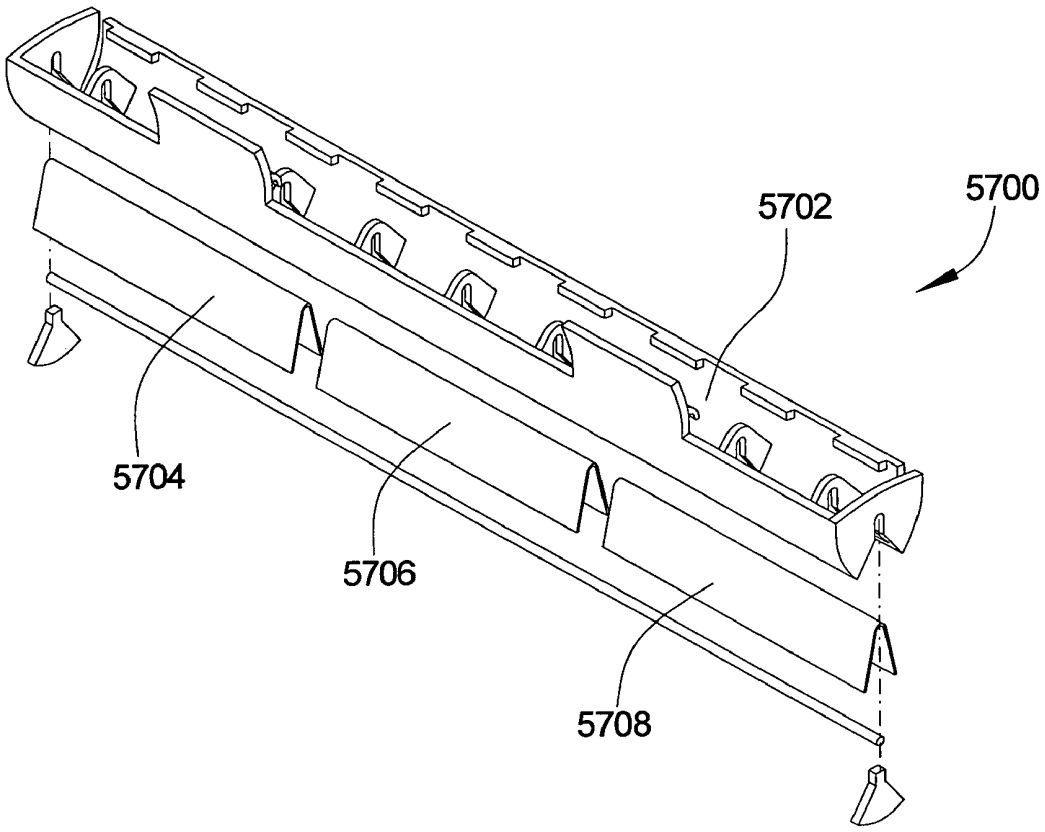

FIG. 58

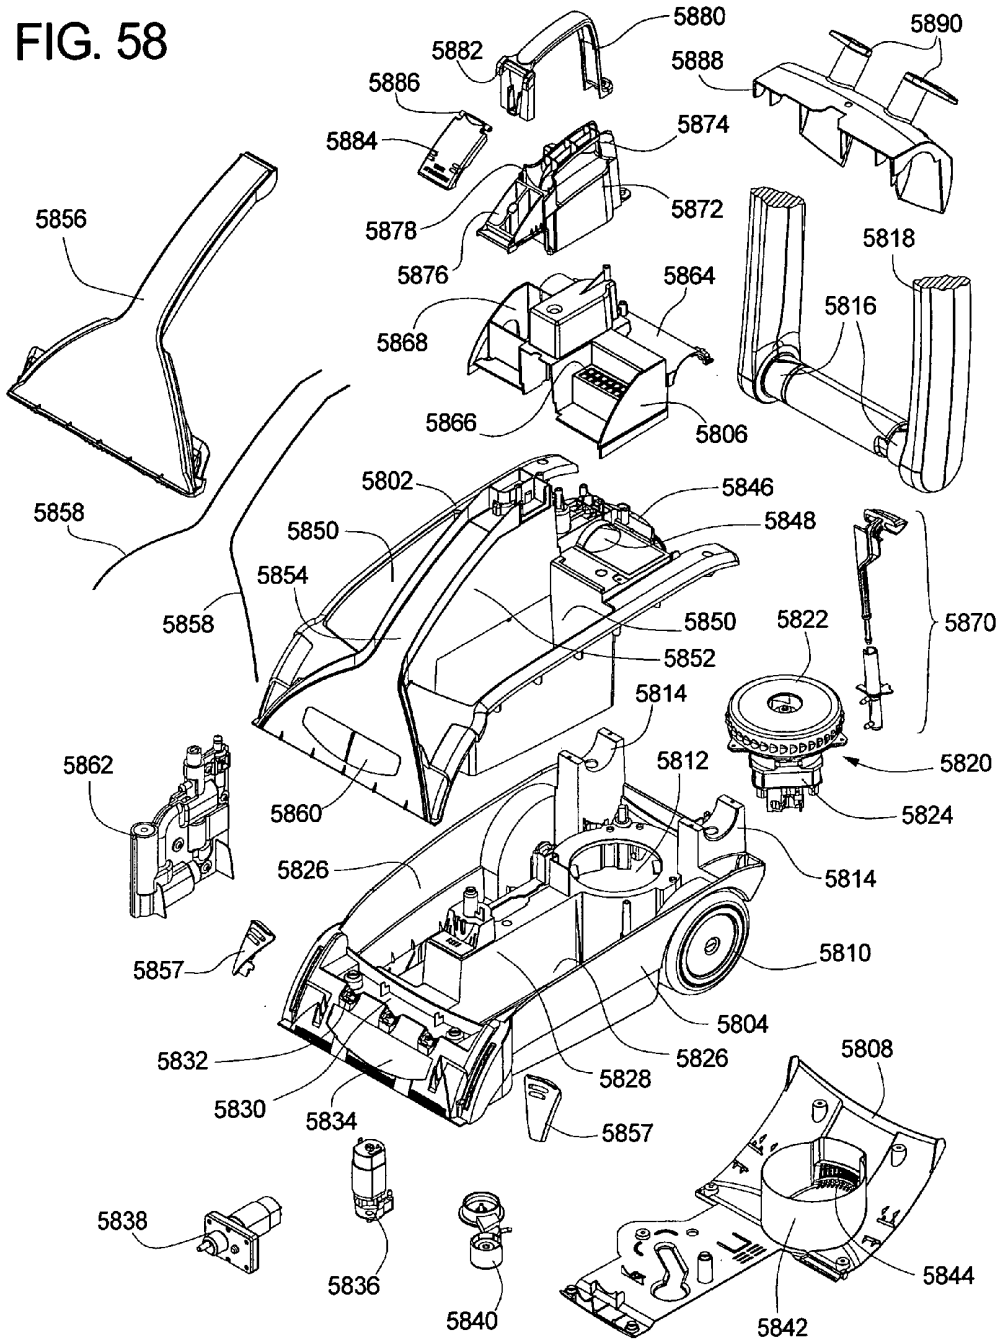
5880
5882
5886
5884
5878
5876
5874
5872
5890
5888
5856
5868
5866
5864
5806
5818
5816
5858
5802
5846
5850
5848
5854
5858
5850
5852
5822
5870
5814
5862
5860
5812
5820
5824
5826
5814
5857
5810
5804
5832
5826
5828
5830
5834
5857
5808
5838
5836
5840
5844
5842

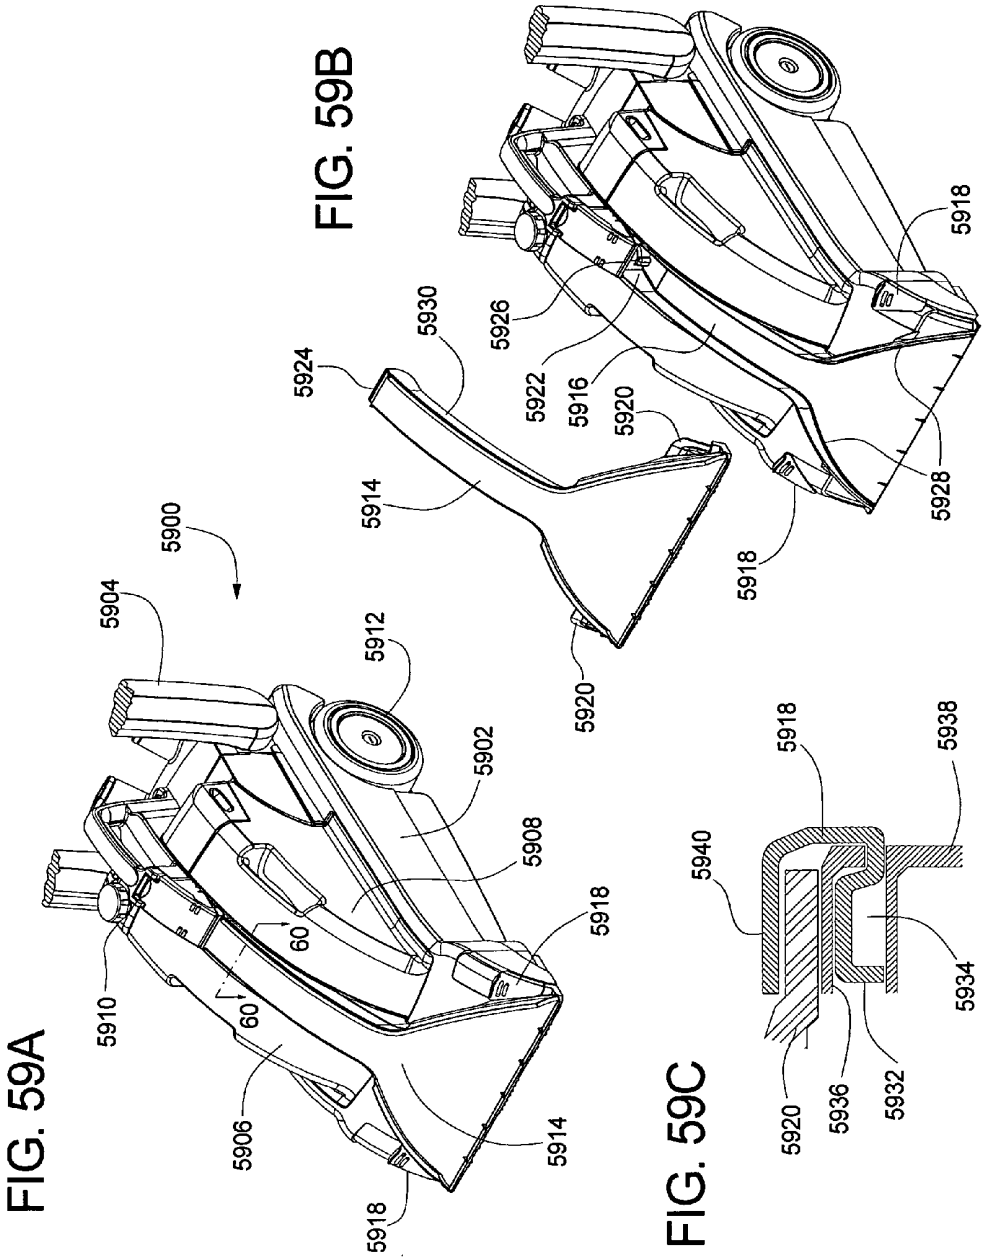
5900
5904
5912
5902
5908
5918
5910
60
60
5906
5914
5918
FIG. 59A
5924
5930
5926
5922
5916
5920
5914
5920
5918
5928
5918
FIG. 59B
5940
5918
5938
5934
5920
5936
5932
FIG. 59C

FIG. 60A

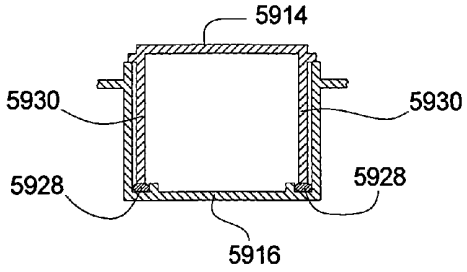

FIG. 60B

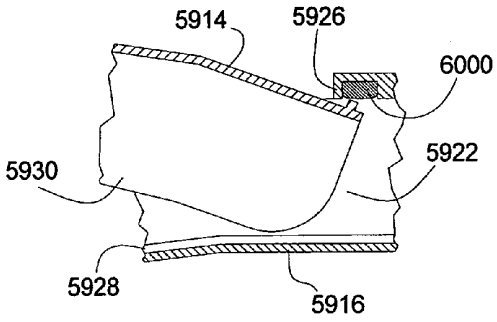

FIG. 60C

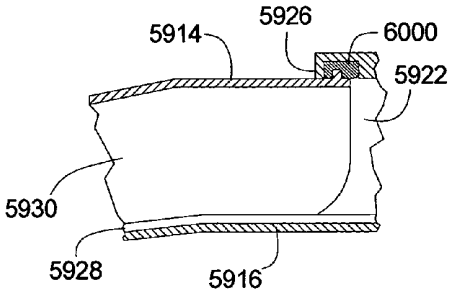

FIG. 61A

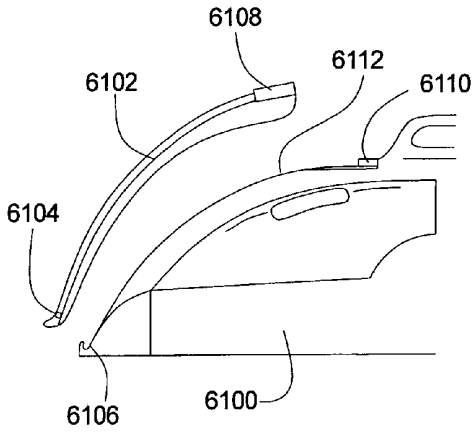

FIG. 61B

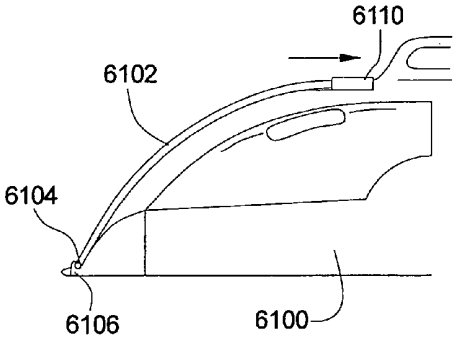

FIG. 62
PRIOR ART

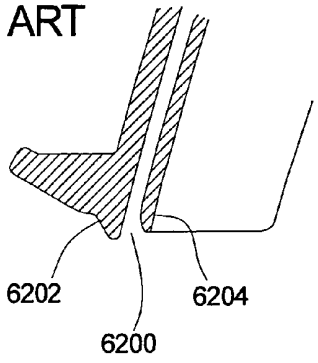

FIG. 63

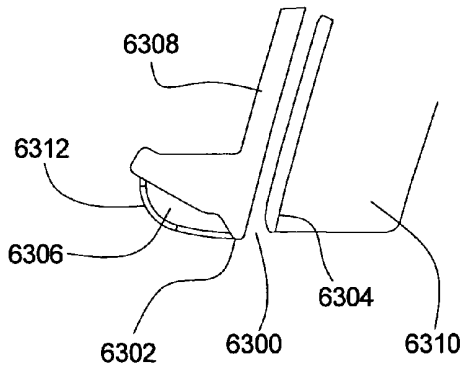

FIG. 64A

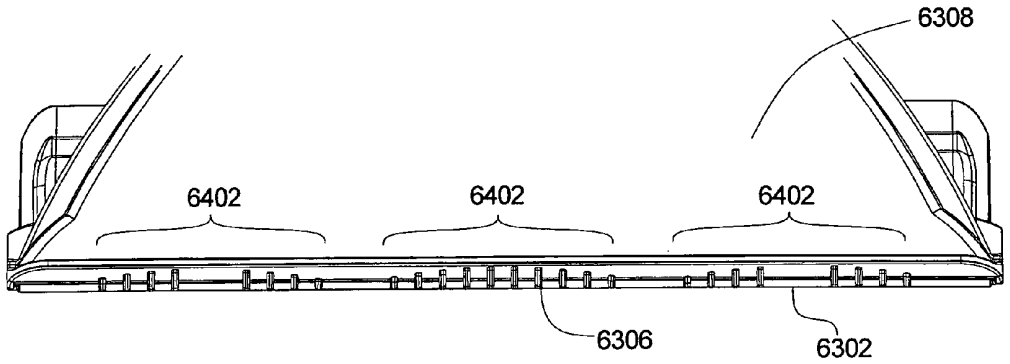

FIG. 64B

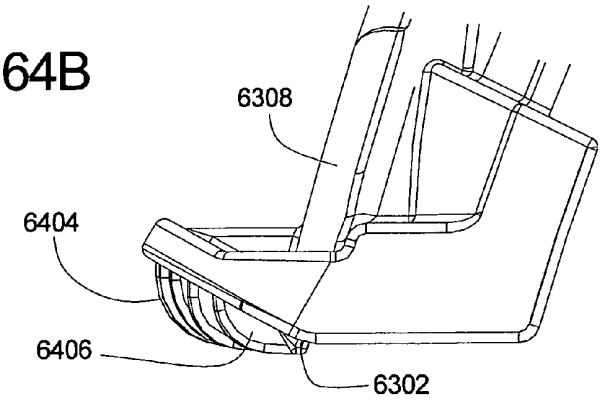

WET EXTRACTOR CLEANING DEVICE FLUID TANK ARRANGEMENT

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims priority to U.S. Provisional Application No. 60/506,180, filed on Sep. 29, 2003, and U.S. Provisional Application No. 60/528,187, filed on Dec. 10, 2003, which are incorporated herein by reference in their entirety.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to floor cleaning devices.

2. Description of Related Art

Many different types of floor cleaning devices are commonly used to clean carpets, rugs and bare floors. Examples of such devices include wet extractors, vacuum cleaners, floor polishers, steam cleaners and the like. A traditional upright floor cleaning device has a base assembly and an operating handle that extends upwardly from the rear of the base assembly. The operating handle is used to guide the base assembly across the floor during operation, and in operation the handle is pushed forward, causing the base to move forward and the handle to pivot downward, and pulled back, causing the handle to move up and the base to move backwards. The operating handle is frequently designed to incorporate various parts of the cleaning device, such as water tanks, vacuum motors, filters, and the like. In these configurations, much of the device's weight is moved up to the handle, thus requiring the user to bear a portion of this weight when operating the device, particularly on the forward strokes. The operating handle also may be equipped with accessory cleaning tools and an extension hose for remote cleaning.

The operating handle of conventional cleaning devices is not configured to facilitate compact storage, shipping, and/or transportation of the device. Specifically, when the floor cleaning device is not in use, most users desire to store the device in a closet or other small space. Because the operating handle occupies a relatively large amount of space, its design is not ideal for compact storage. Shipping is also problematic with conventional cleaning devices because their bulky shapes can not be fit into conventional rectangular shipping boxes without including a large amount of unused air space in the box, which increases shipping cost. In order to reduce this additional shipping expense, some manufacturers disassemble the devices for shipment. While such disassembly reduces shipping costs, it is less desirable to customers, who typically prefer not to assemble the devices, may not be able to do so, and may find it inconvenient to disassemble the device for later storage, shipment and/or transportation. Also, when the floor cleaning device must be transported from one location to another (e.g., up or down a flight of stairs), a user must lift the device off the floor by the operating handle and carry the device in a relatively awkward position to the new location. It can be appreciated that the bulky nature of the device makes this an undesirable task for many users. Similarly, transporting the floor cleaning device in a vehicle (e.g., in a trunk compartment) can be challenging for many users due to the difficulties in loading and unloading the device into and out of the vehicle. This challenge is compounded by the fact that, in the case of wet extractors, users may wish to avoid tipping the device on its side to prevent water from escaping into the vehicle.

In an effort to overcome these problems, floor cleaning devices have been designed in which the operating handle can be partially collapsed to facilitate storage, shipping, and/or transportation of the device. For example, one floor cleaning device has been designed in which the operating handle includes an upper fork and a lower fork, wherein the upper fork can be folded downwardly to a position adjacent the lower fork. An example of such a device is shown in U.S. Pat. No. 3,673,628 to Gaudry et al. (This patent and all others discussed in the present disclosure are hereby incorporated herein by reference in their entireties.) While this device is an improvement on traditional devices, the operating handle is only partially collapsible and thus continues to occupy too much vertical space.

Another floor cleaning device has been designed in which the operating handle includes a pair of upper arms and a pair of lower arms, wherein the lower arms can be pivoted downwardly relative to the base assembly and then the upper arms can be slid inwardly alongside the lower arms. An example of such a device is shown in U.S. Pat. No. 4,245,371 to Satterfield. While the collapsed operating handle of this device occupies a smaller amount of vertical space, a portion of the operating handle still extends laterally a considerable distance from the base assembly and thus occupies a larger amount of horizontal space. As such, this design in not ideal for compact storage, shipping, and/or transportation of the device.

Yet other floor cleaning devices have been designed in which the operating handle includes an upper portion and a lower portion, wherein the upper portion can be folded downwardly relative to the lower portion and then the folded upper/lower portions can be pivoted downwardly relative to the base assembly. Examples of such devices are shown in U.S. Pat. No. 3,203,707 to Anderson and U.S. Pat. No. 3,204,272 to Greene et al. While the collapsed operating handles of these devices occupy a smaller amount of vertical space, substantial portions of the operating handles extend laterally from the base assemblies and thus occupy an even larger amount of horizontal space. As such, these designs are not suitable for compact storage, shipping, and/or transportation of the devices.

Still other floor cleaning devices have been designed in which the operating handle extends upwardly from a two-part base assembly (which includes a horizontal portion and a vertical portion), wherein the vertical portion of the base assembly can be pivoted downwardly onto the floor and then the operating handle can be folded onto the two-part base assembly. Examples of such devices are shown in U.S. Pat. No. 4,660,246 to Duncan et al, U.S. Pat. No. 4,662,026 to Sumerau et al., U.S. Pat. No. 4,670,937 to Sumerau et al., U.S. Pat. No. 4,763,382 to Sumerau, and U.S. Pat. No. Des. 310,438 to Burns. While these devices also occupy less vertical space, the collapsed base assembly occupies an even larger amount of horizontal space. Thus, these designs are also not suitable for compact storage, shipping, and/or transportation of the devices. Furthermore, such devices require the operator to actually remove the handle, reverse it, and reinsert it into the device, which is inconvenient for the operator. This design also limits the manufacturer's ability to place electric switches in the handle, which also inconveniences the operator.

A variety of wet extraction cleaning devices are available for cleaning carpets and bare floors. Typical wet extractors have a supply tank for storing cleaning fluid, and a fluid

deposition system that is used to deposit the cleaning fluid onto the floor. In some cases, a mixture of water and detergent may be placed in the supply tank, but in other cases, the wet extractor has a separate detergent tank, and fresh water is placed in the supply tank and is mixed with detergent from the detergent tank by the fluid deposition system. Typical wet extractors also have a vacuum source that is used to suck in the deposited cleaning fluid, and any dirt or grime that it extracts from the floor, through a floor nozzle. This waste fluid is deposited and stored in a recovery tank.

In order to prevent waste fluid from entering and possibly damaging the vacuum source, the recovery tank is positioned, in a fluid flow sense, between the vacuum source and the floor nozzle. The recovery tank is designed to remove the waste fluid from the air flow in which it is entrained, while allowing the air to continue to the vacuum source. Typical wet extractors also have a shutoff mechanism that blocks the vacuum source when the recovery tank is full and prevents waste fluid in the recovery tank from sloshing into the vacuum source when the wet extractor is moved back and forth by the operator. This shutoff mechanism is usually provided in the form of a float device. The float device has a buoyant float that rises on the water, and a sealing surface on or attached to the buoyant float that blocks the passage to the vacuum source. In many cases, the operator of the wet extractor will be alerted to the fullness of the recovery tank by the change in pitch of the vacuum source as its air flow is becoming cut off, and this serves as a signal to empty the recovery tank.

Although a number of different wet extractors, supply tanks and recovery tanks have been produced, the prior art suffers from numerous shortcomings. One shortcoming of prior wet extractors is the that the inlet nozzle often becomes coated or clogged by dirt and debris removed from the surface being cleaned. This is especially true where the inlet nozzle is provided as a narrow slit, which is a common and favorable configuration to generate high-speed airflow and strong, focused suction to remove the fluid and dirt. Because the nozzle profile is so narrow, it is difficult to clean using conventional means, and users must resort to cleaning the nozzle with pipe cleaners and other specialized devices.

Another shortcoming of the prior art relates to supply tanks, which are typically difficult to fill unless a large sink or hose is available. For example, U.S. Pat. No. 5,406,673 to Bradd et al. (the '673 patent) and U.S. Pat. No. 5,937,475 to Kasen et al. (the '475 patent) provide supply tanks that are approximately bucket-shaped, and require a large vertical clearance to place them under sink faucet outlets. Furthermore, such a design may be difficult to fill unless the faucet can be swiveled out of the way to place the tank into the sink. Still further, the supply tank of the '475 patent is retained in place by latching devices that must be manipulated before removing the supply tank. Such latches require additional manufacturing, are subject to breaking, are often not intuitively understood by users, making them difficult to operate, unhook and realign for reinstallation. Similar problems are present with the supply tank of U.S. Pat. No. 6,073,300 to Zahuranec et al. (the '300 patent).

Other shortcomings of the prior art relate to the design of the recovery tank. For example, the recovery tank disclosed in the '673 patent has a complex multi-chambered design that requires the incoming air/fluid mixture to traverse a horizontal inlet that can easily backflow when the vacuum source is turned off, causing waste fluid to seep back out onto the floor. The recovery tank of the '673 patent is also inconveniently placed below the supply tank, and an operator must tilt the operating handle back and away from the upright resting position in order to access the recovery tank. Such maneuvering is awkward to perform and risks toppling the device during recovery tank removal and insertion. Still another shortcoming of the '673 device is that the recovery tank float is located in a relatively large chamber, making it more subject to fluid sloshing and unnecessary vacuum cut-off. The complex structure of the '673 recovery tank also requires disassembly to drain, and is relatively expensive to manufacture.

The recovery tank of the '475 patent also suffers from shortcomings. One shortcoming is that the fluid inlet leads almost directly into the main reservoir of the water recovery tank, and allows the incoming air/fluid mixture to short-circuit the reservoir and go directly into the outlet leading to the vacuum source. Another shortcoming of the '475 recovery tank is that it requires a complex multi-piece construction in which the float is permanently sealed, increasing the cost of construction, making it difficult or impossible to service the float, and necessitating the inclusion of a separate drain plug. Also, like the '673 device, the '475 recovery tank is retained in the wet extractor under the supply tank, and the operating handle must be tilted back from the upright resting position to remove the recovery tank. Still further, the '475 recovery tank uses a pivoting tank handle, which requires additional material and construction effort, and is susceptible to breaking. The recovery tank of the '300 patent has similar shortcomings. In addition to being a complex multi-piece structure, the '300 recovery tank is retained by a latch that requires additional material and construction effort, may be difficult to operate, and appears to be operable only when the operating handle is leaned back from the upright resting position. Other prior art recovery tanks suffer from these and other problems.

Other shortcomings of the prior art relate to the overall configuration of the supply and recovery tanks in the wet extractor. In many instances, such as in the '673 patent, the '475 patent and the '300 patent, the supply tank is carried in the operating handle of the device. Such devices suffer from being difficult to ship and store. These configurations are also unduly complex, making them expensive to manufacture and difficult to operate. Still further, such devices require more operator effort because the operator must bear the weight of the heavier operating handle when the wet extractor is at the end of the forward stroke and the handle is tilted at its lowest angle relative to the ground. Other devices, such as the wet extractor disclosed in U.S. Pat. No. 6,131,237 to Kasper et al. (the '237 patent), have reduced the weight of the operating handle by placing both the supply and recovery tanks in the base, but in the '237 patent device, the handle weight is increased by mounting an accessory device to it, and the operating handle still must be reclined away from the upright resting position to remove the tanks. Furthermore, the supply and recovery tanks of the '237 patent are contained in a single complex chamber having a flexible bladder, which is relatively difficult to manufacture, operate and clean.

Numerous fluid systems for extractors have been developed that apply fluids to a surface to be cleaned to help clean stubborn stains and extract deeply-rooted dirt and grime. The fluid may simply be water, or it may include detergents, fabric brighteners, perfumes and other useful compounds. The fluid also may be heated or converted to steam before being deposited. Liquid management is a continuing challenge in the design of wet extractors. In order to operate well, the operator of the wet extractor must be provided with some way of controlling when the fluid is deposited onto the

floor or other surface being cleaned. Furthermore, such operations should be performed for both floor operations, and, if an auxiliary tool attachment is provided, for remote operations.

Previous attempts to provide liquid management systems have entailed the use of complex, bulky and costly arrangements of pumps, valves, solenoids, switches and the like. For example, U.S. Pat. No. 6,286,180 (the '180 patent) and U.S. Pat. No. 6,131,237 (the '237 patent), both to Kasper et al., disclose decentralized liquid management systems that require the pump priming assembly to be connected to a vacuum source to prime the pump. This requires additional construction material and limits flexibility in locating the priming assembly. This also may cause some delay between the time the pump is activated and the time that fluid is pressurized and available for depositing on the surface to be cleaned. As such, these systems require the fluid pump to operate at all times, and must use a mechanical pushbutton-type valve to control the flow of fluid. The use of this mechanical valve requires the valve to be located in the handle of the device so that it can be operated by the user. Furthermore, alternatives to mechanical valves in systems such as those in the '180 and '237 patents typically require the use of expensive electrically-operated solenoid valves to control fluid flow, such as shown in U.S. Pat. No. 6,513,188 to Zahuranec et al. (the '188 patent). A similar deficiency is encountered in the gravity-fed systems of U.S. Pat. No. 6,073,300 to Zahuranec et al. (the '300 patent), and U.S. Pat. No. 5,676,405 to Reed (the '405 patent), which also require a mechanical valve that must be positioned in the handle of the device, or, if the valve is positioned outside the handle, an expensive solenoid to operate the valve.

Another deficiency of prior art liquid management systems relates to the manner in which such systems are converted to operate in an accessory tool mode. In typical prior art systems, such as those disclosed in the '300 patent, the '180 patent, and the '405 patent, the accessory tool is installed in at least two steps. In one step, the vacuum hose for the accessory tool is installed, and in the other step the fluid line to the accessory tool is attached. In many cases, such as in the '405 and '300 patents, the fluid hose hookup is also constructed as a complex and relatively expensive fitting that has a shutoff valve integrally formed with the fluid passage at the point of connection. These systems are inconvenient and relatively difficult to use.

Other prior art accessory tool hookup systems have been developed that use a single plug to install both the vacuum source and the fluid line. Examples of such devices are provided in U.S. Pat. No. 5,400,462 to Amoretti (the '462 patent), U.S. Pat. No. 5,459,901 to Blase et al., (the '901 patent), and U.S. Pat. No. 5,669,098 to Tono (the '098 patent). Although these devices conveniently use a single plug to attach the tool to a vacuum source and a fluid source, neither the '462 patent nor the '901 patent provides any way to divert vacuum and fluid flow from a floor-cleaning circuit to the accessory tool circuit. Both of these devices also pose electrical shock risks to the user due to the exposed electrical switch and terminals in the '462 patent, and the use of a separate electrical plug in the '901 patent. This risk is compounded by the lack of any sort of shutoff valve or anti-siphoning device for the fluid lines at or near the connection point. The '098 patent also suffers from deficiencies as it relies on a coaxial design that is unnecessarily complex, and uses a complex shutoff valve that is integrally formed with the fluid passage at the point of connection with the accessory tool. Such combined fluid passage/shutoff valves can be relatively expensive, and, because the valve is necessarily positioned at the point of contact between the parts, the valves are susceptible to being contaminated by dirt and debris on the parts, which may impair the seal and result in leakage.

Other deficiencies of prior art liquid management systems relate to detergent mixing and metering systems. It many instances, wet extractors have been provided with separate clean water and detergent tanks so that the user does not have to mix the fluids into a single tank. The use of separate clean water and detergent tanks also allows the user to adjust the amount of detergent that is mixed with the water. Previous detergent control valves have been unduly complex. For example, the control valve disclosed in U.S. Pat. No. 4,570,856 to Groth et al. (the '856 patent) uses a complex system of hoses to pressurize the detergent chamber, and uses a rocker assembly to selectively pinch off the detergent supply hose, which can damage the hose and require more expensive hose material. Other systems, such as the system in U.S. Pat. No. 5,937,475 to Kasen et al. (the '475 patent), use valve assemblies that are located in the clean water flow path, and require a rotational movement to actuate such devices allow clean water and detergent to mix even when the device is inactive, and must be turned by hand to change the detergent mixture setting.

It is well known in the art of cleaning floors and other surfaces that it is often desirable to agitate the surface being cleaned to shake out and extract deeply embedded dirt and grime. As such, various different mechanical agitators have been made to agitate floors and carpets to assist with cleaning operations. These devices have been used on their own, in conjunction with vacuums and wet extractors and with other cleaning devices. Many previously known agitators can generally be placed into various categories, such as horizontal rotating brushes (often called "beater brushes" or "disturbulators"), and vertical rotating brushes, but other types of agitator have also been devised.

One type of agitator, the horizontal rotating brush, is exemplified by the device disclosed in U.S. Pat. No. 5,937,475 to Kasen et al. (the '475 patent). In this design, the brush comprises an elongated spindle that is oriented horizontally with its rotating axis parallel to the surface to be cleaned, and has a number of bristles extending radially from its surface. When the spindle is rotated, the bristles are driven downward into the surface being cleaned and swept back through a circular arc. Although these devices have been used with some success, it has been found that they suffer from some disadvantages. For example, they tend to spray fluids deposited by wet extractors, they accumulate dirt (especially hair) and require constant cleaning and attention, and are subject to bearing and drive belt failure. In addition, the aggressive sweeping of the bristles through the carpet or other surface being cleaned tends to cause accelerated wear of the surface, and may be unsuitable for delicate fabrics.

A second type of agitator, the vertical rotating brush, is exemplified by U.S. Pat. No. 6,009,593 to Crouser et al. (the '593 patent). This type of agitator comprises one or more spindles that rotate about an axis aligned orthogonally to the surface being cleaned. Each brush has a number of bristles that project approximately along the axis of rotation, and are swept through a flat circular path (relative to the device) when the brushes rotate. Like the horizontal rotating brush design, this design is prone to accumulating dirt, and particularly hair. Furthermore, it has been found that the counter-rotating vertical brushes of this agitator tend to leave an undesirable streaked pattern in the nap of some carpets, and, when used in a wet extractor, tend to leave corresponding streaks of unrecovered fluid on the surface

being cleaned. The aggressive sweeping of the bristles through a large path of travel is also believed to contribute to accelerated carpet wear and may be unsuitable for delicate fabrics.

Another type of agitator that has been devised uses a brush that is simultaneously vibrated laterally relative to the fore-aft direction of the cleaning device and vertically relative to the plane of the surface being cleaned. Such devices are shown in U.S. Pat. No. 2,109,621 to Kirby (the '621 patent) and U.S. Pat. No. 6,353,964 to Andrisin, Jr. et al. (the '964 patent). The '621 patent uses a turbine to drive a shaft that has a brush at its end and an eccentric weight between the brush and the turbine. As the shaft rotates, the eccentric weight applies both vertical and lateral centripetal forces to thereby impel the brush with a "rapid scratching movement." Additional vertical forces against the surface being cleaned are applied by a set of springs mounted between the brush and the device's housing. The '964 patent uses a similar arrangement, but instead drives the brush using an eccentric that rotates in a corresponding hole in the brush. The eccentric rotates about an axis that is angled relative to the floor, and thereby imparts lateral, longitudinal and vertical forces and movements to the brush. Both of these agitators apply a significant vertical force to the brush, which is believed to contribute to accelerated wear of the surface being cleaned and tends to pound dirt and debris more deeply into the surface being cleaned. These agitators (especially the '621 patent) are also believed to provide inconsistent cleaning due to the somewhat random movements generated by their drive systems. Furthermore, these agitators are somewhat limited in their application because they rely on turbine drives that can not be operated independently of the vacuum source.

Still another agitator has been devised that moves laterally relative to the device's fore-aft direction of operation, such as shown in U.S. Pat. No. 3,685,081. However, this device also suffers from notable shortcomings, for example, the two reciprocating brushes do not fully cover the surface being cleaned, and therefore are believed to provide inconsistent cleaning. Furthermore, the device is believed to cause accelerated wear of the surface being cleaned because the entire weight of the device rests on the agitator brushes, and the brushes sweep through a relatively large range of motion. This device also fails to provide any vacuuming capability, and appears to be very difficult to operate on carpeted floors or other surfaces that would tend to hold the brushes and cause the machine to move erratically.

Similar agitating devices have been employed with accessory tool devices and "power heads" that plug into the main body of a cleaning device to provide remote cleaning capability. These devices suffer from similar deficiencies.

Vacuum cleaning devices often benefit from using a flexible strip that contacts the surface being cleaned to focus the vacuumed air and physically constrain the debris being recovered and direct it through the device's vacuum inlet nozzle. Such flexible strips are typically referred to as "wipers" or "squeegees." Wipers are particularly effective when the device is used to clean bare floors, windows, or other hard surfaces that form a solid lower barrier that works in conjunction with the flexible strip to prevent debris from escaping the vacuum inlet nozzle. Wipers are also particularly useful with devices that are intended to recover fluids from the surface being cleaned, such as wet extractors and window washers, which deposit cleaning fluid on the surface then recover the fluid with a vacuum. These wipers can be used with both floor cleaning devices and hand-held cleaners, such as accessory cleaning tools and portable cleaners. While many designs for such wipers have been illustrated in the prior art, there still remains a need to provide an improved squeegee system that provides acceptable cleaning performance, but can be selectively removed from a cleaning device in a convenient manner.

Therefore, the objectives of the present invention are to provide various floor cleaning devices and features that partially or fully overcome or ameliorate these and various other shortcomings of the prior art. Although certain deficiencies in the related art are described in this background discussion and elsewhere, it will be understood that these deficiencies were not necessarily heretofore recognized or known as deficiencies. Furthermore, it will be understood that, to the extent that one or more of the deficiencies described herein may be found in an embodiment of the claimed invention, the presence of such deficiencies does not detract from the novelty or non-obviousness of the invention or remove the embodiment from the scope of the claimed invention.

SUMMARY OF THE INVENTION

These and other objectives of the invention are addressed by an embodiment of the invention comprising a wet extraction floor cleaning device having a base assembly adapted for movement on a surface being cleaned, an operating handle pivotally attached to the base assembly, a supply tank having a supply tank outlet, and a recovery tank having a recovery tank inlet and a recovery tank outlet. The base assembly has an inlet nozzle that extends from an inlet slip proximal the surface being cleaned to a nozzle outlet. The device further includes a fluid deposition assembly that can be selectively placed in fluid communication with the supply tank outlet, a vacuum source, and first and second external pockets. The supply and recovery tanks are adapted to be selectively placed in the first and second external pockets, thereby placing the supply tank outlet in fluid communication with the fluid deposition system, the recovery tank inlet in fluid communication with the nozzle outlet, and the recovery tank outlet in fluid communication with the vacuum source inlet.

In various additional embodiments, the supply tank and the recovery tank may be received in the first pocket and the second pocket, respectively, by snap engagement, or may be individually removable.

The first and second external pockets also may be located in the base assembly. In such an embodiment, either or both of the first and second external pockets may be adapted to receive the supply tank or recovery tank and thereby prevent longitudinal or lateral translation of the supply or recovery tank relative to the base assembly when received therein. In such an embodiment, the supply or recovery tank may be slidably receivable into the respective external pocket in a substantially vertical direction. The first and second pockets may also be positioned between the nozzle inlet and the pivot axis. In still another embodiment, the base assembly may further have a third external pocket and a detergent tank adapted to be selectively received in the third pocket. In this embodiment, the supply tank, the recovery tank and the detergent tank may be individually removable.

In still another embodiment, the supply tank and the recovery tank may protrude from the lower housing. In this embodiment, the upper housing may have a vertical rib positioned between the supply tank and the recovery tank. A handle lock may also be provided and adapted to selectively

hold the operation handle in an upright resting posit ion, in which the supply tank and the recovery tank are selectively removable.

In yet another embodiment, the first and second external pockets may be arranged on opposite sides of a longitudinal centerline of the device, or may be laterally juxtaposed with one another relative to a longitudinal axis of the base assembly.

In still other embodiments, the inlet nozzle may comprise a selectively removable nozzle cover attachable and removable without the use of tools.

Furthermore, the operating handle may comprise a collapsible handle having an upper handle portion and a lower handle portion. In one such embodiment, the device further comprises a handle lock adapted to selectively hold the lower handle portion in an upright resting position, and the supply tank and the recovery tank are selectively removable when the lower handle portion is in the upright resting position. In another such embodiment, the lower handle portion is pivotally attached to the base assembly, and the upper handle portion being pivotally attached to the lower handle portion.

In still another embodiment, the device may further include a carry handle, which may be located on or adjacent to a vertical rib between the supply tank and the recovery tank. In an embodiment having a vertical rib between the tanks, the fluid deposition assembly may comprise a valve assembly located within the vertical rib and fluidly connected to one or more spray nozzles. The inlet nozzle may also be located at least partially on top of the vertical rib, and the device may have an accessory tool attachment port located on the rib and in fluid communication with the nozzle and the recovery tank.

The present invention will be better understood from the following detailed description of the invention, read in connection with the drawings as hereinafter described.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** is a front perspective view of a floor cleaning device in accordance with a preferred embodiment of the present invention, with the operating handle shown in the extended position.

FIG. **2** is a rear perspective view of the floor cleaning device of FIG. **1**, showing the handle release pedal of the lower lock.

FIG. **3** is a fragmented side cross-sectional view of the lower lock of FIG. **2** taken along line **3**—**3**, shown in the locked position.

FIG. **4** is a fragmented side cross-sectional view of the lower lock of FIG. **3**, shown in the released position.

FIG. **5** is an exploded fragmented front perspective view of the floor cleaning device of FIG. **1**, showing the interrelationship between the upper handle, the lower handle and the upper lock.

FIG. **6** is a fragmented front perspective view of the upper lock of FIG. **5**, shown in the locked position.

FIG. **7** is a fragmented rear perspective view of the upper lock of FIG. **6**, shown in the locked position.

FIG. **8** is a fragmented exploded front perspective view of the upper lock of FIG. **6**, shown in the locked position.

FIG. **9** is a fragmented exploded front perspective view of the upper lock of FIG. **6**, shown in the released position.

FIG. **10** is a front perspective view of the floor cleaning device of FIG. **1**, with the operating handle shown in a partially collapsed position.

FIG. **11** is a front perspective view of the floor cleaning device of FIG. **1**, with the operating handle shown in the collapsed position.

FIG. **12** is a front perspective view of a floor cleaning device in accordance with a first alternative embodiment of the present invention, with the operating handle shown in the extended position.

FIG. **13** is a front perspective view of the floor cleaning device of FIG. **12**, with the operating handle shown in a partially collapsed position.

FIG. **14** is a front perspective view of the floor cleaning device of FIG. **12**, with the operating handle shown in the collapsed position.

FIG. **15** is a front perspective view of a floor cleaning device in accordance with a second alternative embodiment of the present invention, with the operating handle shown in the extended position.

FIG. **16** is a front perspective view of the floor cleaning device of FIG. **15**, with the operating handle shown in a partially collapsed position.

FIG. **17** is a front perspective view of the floor cleaning device of FIG. **15**, with the operating handle shown in the collapsed position.

FIG. **18** is a front perspective view of a floor cleaning device in accordance with a third alternative embodiment of the present invention, with the operating handle shown in the extended position.

FIG. **19** is a front perspective view of the floor cleaning device of FIG. **18**, with the operating handle shown in a partially collapsed position.

FIG. **20** is a front perspective view of the floor cleaning device of FIG. **18**, with the operating handle shown in the collapsed position.

FIG. **21** is a front perspective view of a floor cleaning device in accordance with a fourth alternative embodiment of the present invention, with the operating handle shown in the extended position.

FIG. **22** is a front perspective view of the floor cleaning device of FIG. **21**, with the operating handle shown in a partially collapsed position.

FIG. **23** is a front perspective view of the floor cleaning device of FIG. **21**, with the operating handle shown in the collapsed position.

FIG. **24** is a fragmented front disassembled view a wet extractor of one embodiment of the present invention.

FIG. **25** is a fragmented front perspective view of supply and recovery tank designs of one embodiment of the present invention.

FIG. **26** is a fragmented front perspective view of supply and recovery tank designs of another embodiment of the present invention.

FIG. **27**A is a perspective view of a recovery tank and a recovery tank float assembly of one embodiment of the present invention.

FIG. **27**B is a perspective view of the recovery tank float assembly of FIG. **27**A.

FIG. **27**C is a cutaway side view of the recovery tank of FIG. **27**A shown with the recovery tank float assembly of FIG. **27**B installed therein.

FIG. **28**A is a perspective view of a supply tank of one embodiment of the present invention.

FIG. **28**B is a cross-section view of a supply tank valve assembly.

FIG. **29** is a fragmented cutaway front view of the housing and recovery tank of FIG. **24**, as shown when the recovery tank is installed in the housing.

FIG. **30**A is a side view of an embodiment of a liquid management assembly of the present invention.

FIG. **30**B is an isometric view of a mixing manifold of an embodiment of the present invention.

FIG. **31** is an exploded view of an embodiment of a flow valve assembly of the present invention.

FIG. **32** is a cutaway side view of an embodiment of a pump switch assembly of the present invention.

FIG. **33**A is a side view of an embodiment of another liquid management assembly of the present invention.

FIG. **33**B is an exploded and partially cut away isometric view of the liquid management assembly of FIG. **33**A.

FIG. **33**C is the liquid management assembly of FIG. **33**B shown fully assembled.

FIG. **33**D is a cutaway side view of another embodiment of a flow valve of the present invention.

FIG. **34**A is a partially cut away fragmented perspective view of an embodiment of an accessory tool plug of the present invention.

FIG. **34**B is an exploded view of the accessory tool plug of FIG. **34**A.

FIG. **35**A is fragmented perspective view of an embodiment of an accessory tool outlet of the present invention, shown in the opened position.

FIG. **35**B is fragmented perspective view of the accessory tool outlet of FIG. **35**A, shown in the closed position.

FIG. **35**C is fragmented perspective view of the accessory tool outlet of FIG. **35**A, shown in the open position and with the accessory tool plug of FIG. **34**A installed therein.

FIG. **36** is a cut away side view of an embodiment of a detergent valve assembly of the present invention.

FIG. **37** is a cut away side view of another embodiment of a detergent valve assembly of the present invention.

FIG. **38** is a fragmented perspective view of a wet extractor incorporating a detergent valve assembly of the present invention.

FIG. **39**A is a partially exploded isometric view of linear agitator of the present invention.

FIG. **39**B is an exploded rear view of the linear agitator of FIG. **39**A.

FIG. **39**C is a partially cut away side view of the linear agitator of FIG. **39**A, shown installed in a device housing and in the extended position.

FIG. **39**D is a partially cut away side view of the linear agitator of FIG. **39**A, shown installed in a device housing and in the retracted position.

FIGS. **40**A–C are a partially cut away side views of three other embodiments of linear agitators of the present invention, shown installed in device housings.

FIGS. **41**A–C are side views of three embodiments of agitator combs of the present invention, shown uninstalled.

FIG. **42** is a cut away, partially schematic, side view of a wet extractor housing incorporating a linear agitator of the present invention.

FIGS. **43**A–C are partially cut away side views of three embodiments of linear agitator drive interfaces of the present invention.

FIGS. **44**A and **44**B are front views of two embodiments of drive systems of the present invention.

FIGS. **44**C and **44**D are top views of two additional embodiments of drive systems of the present invention.

FIG. **45**A is an isometric view of an agitator assembly and handle of another embodiment of the present invention.

FIG. **45**B is an exploded view of the agitator assembly of FIG. **45**A.

FIG. **46** is a partially cut away isometric exploded view of an embodiment of an agitator of the present invention.

FIG. **47** is a cut away view of the agitator of FIG. **46** as viewed along reference line **47**—**47**, shown installed in an agitator assembly housing.

FIG. **48**A is an exploded isometric view of an embodiment of a modular agitator assembly of the present invention.

FIG. **48**B is a partially cut away side view of the modular agitator assembly of FIG. **48**A.

FIGS. **49**A and **49**B are a cut away top views of the modular agitator assembly of FIG. **48**A showing a mode selector valve in the agitating and vacuuming positions, respectively.

FIGS. **50**A and **50**B are partially cut away side and top views, respectively, of the modular agitator assembly of FIG. **45**A showing the mode selector valve in the agitating position.

FIGS. **50**C and **50**D are partially cut away side and top views, respectively, of the modular agitator assembly of FIG. **45**A showing the mode selector valve in the vacuuming position.

FIG. **51**A is an exploded isometric view of a surface cleaning tool of one embodiment of the present invention.

FIG. **51**B is a cut away side view of the surface cleaning tool of FIG. **51**A as seen from reference line **1**—**1** thereof, and shown attached to the inlet nozzle of a cleaning device.

FIG. **52** is a fragmented front view of an embodiment of a wiper that may be used with an embodiment of the present invention.

FIGS. **53** to **56** are cut away side views of four additional embodiments of surface cleaning tools of the present invention.

FIG. **57** is an exploded isometric view of another embodiment of a surface cleaning tool of the present invention.

FIG. **58** is an exploded isometric view of a wet extractor of the present invention showing the housing construction thereof.

FIGS. **59**A and **59**B are isometric views of the embodiment of FIG. **58**, shown with the nozzle cover attached and removed, respectively.

FIG. **59**C is a section view of a nozzle assembly tab of the embodiment of FIGS. **59**A and B.

FIG. **60**A is a section view of the nozzle cover and housing of FIG. **59**A, as viewed along line **60**—**60** of FIG. **59**A.

FIGS. **60**B and **60**C are a side section views of the nozzle cover and housing of FIG. **59**A, shown with the nozzle cover partially and fully installed, respectively.

FIGS. **61**A and **61**B are side views of another embodiment of a nozzle cover assembly of the present invention shown uninstalled and installed, respectively.

FIG. **62** is a section view of a prior art extractor inlet nozzle.

FIG. **63** is a section view of an extractor inlet nozzle of the present invention.

FIGS. **64**A and **64**B is a front and side views, respectively, of a removable nozzle cover of the present invention having chatter-reducing structures of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

As used herein, and unless otherwise specified, the term "longitudinal" refers to the fore-aft direction of the cleaning device, as generally defined by the device's intended direction of movement during use. In devices with fixed wheels, the longitudinal direction is typically parallel with the orientation of the device's fixed wheels. Also as used herein,

and unless otherwise specified, the term "lateral" refers to the direction perpendicular to the longitudinal direction and generally in the plane of the surface being cleaned. Finally, unless otherwise specified, the term "vertical" means the direction orthogonal to the plane of the floor or other surface upon which the device is intended to be operated. The use of these terms is intended to clarify explanation of the invention, and these terms are not intended to limit parts and features described thereby to being strictly co-linear with the above-described directions. For example, a part, such as an operating handle, that is described as extending "vertically" is not limited to only being orthogonal to the plane of the surface to be cleaned, and may additionally extend longitudinally and/or laterally, to thereby be oriented at an angle of less than 90 degrees to the surface to be cleaned. Furthermore, these terms are used in a relative sense with the device as a the frame of reference (rather than using a global frame of reference), and it will be appreciated that a part that is described as having a particular orientation may have a different global orientation if the entire device is rotated in the global frame of reference. The same holds true for terms describing relative positions, such as "side-by-side," "left," "right," "above," "below," "next to," "behind," "in front of," "juxtaposed," and so on.

A first aspect of the present invention is directed to a floor cleaning device with a collapsible operating handle that is designed for compact storage, shipping, and/or transportation of the device. While the invention will be described in detail herein with reference to several embodiments of the invention applied to wet extractors, it should be understood that the invention may be applied to other types of floor cleaning devices, such as vacuum cleaners, floor polishers, steam cleaners and the like. In one preferred embodiment, the device includes a base assembly adapted to be guided across a floor during operation of the device. Also included is an operating handle having a lower handle and an upper handle, which is moveable between an extended position and a collapsed position for storage, shipping, and/or transportation of the device. When the operating handle is moved to the collapsed position, the upper and lower handles are folded on one another. Thus folded, the lower and upper handles preferably also may be pivoted so that they are positioned atop the base assembly so that they do not extend laterally from the outer periphery of the base assembly by a substantial distance. As such, the operating handle occupies a minimal amount of vertical and horizontal space when collapsed. Examples of other advantages provided by embodiments of the present invention are the ability to instantly set up the device without using tools to attach the handle, and the ability to incorporate wiring and switches into the handle.

Referring to FIG. **1**, a floor cleaning device in accordance with a preferred embodiment of the present invention is designated generally as reference numeral **10**. Device **10** includes a base assembly **12** that is adapted to be guided across a floor during operation of device **10**. Base assembly **12** may comprise an articulated base having multiple parts that pivot relative to one another, such as a floor portion and an upright portion, or may comprise a single unitary base that does not have a separate pivoting upright portion other than the handle. Device **10** has a pair (or more) of wheels **11** located near its back end to facilitate its operation and movement. Device **10** also includes an operating handle **14** that extends upwardly from the rear of base assembly **12**. As will be described in greater detail herein, operating handle **14** is moveable between an extended position for upright operation of device **10** (as shown in FIG. **1**) and a collapsed position for compact storage, shipping, and/or transportation of device **10** (as shown in FIGS. **10** and **11**), or for use of the device as a canister-type device. It will be readily appreciated that the operating handle **14** is shown in FIG. **1** in a fully-upright position, and can be tilted backwards to facilitate normal cleaning operations in the upright cleaning mode. The operating handle **14** preferably also may be stored in this fully-upright position if it is not desired or necessary to fold the handle for storage.

Base assembly **12** includes a base housing **16** that surrounds and/or holds various internal components of device **10**. Base housing **16** has a lower housing **18** positioned adjacent the floor, and an upper housing **20** projecting above lower housing **18** that slopes upwardly from the front side to the rear side thereof. Lower housing **18** may be formed integral with upper housing **20**, or may be formed as separate parts and connected together in any suitable manner. Base housing **16** may be formed of any rigid material, and is preferably formed of a material that provides high strength with low weight, such as conventional structural plastic materials, aluminum, and the like. The exterior surface of base housing **16** also may comprise various different parts of the device **10**. For example, the exterior surface of base housing **16** may be formed in part by structural housing members, and in part by water tanks, detergent containers, vacuum nozzles, clear windows, and the like.

The outer periphery of lower housing **18** is formed by a front side **22**, a rear side **24**, a right side **26** (i.e., the side shown in the foreground of FIG. **1**) and a left side **28** (i.e., the side shown in the background of FIG. **1**), which together define the floor space occupied by base assembly **12**. A first support ledge **30** extends generally horizontally along the top surface of lower housing **18** adjacent the right side **26** thereof, and a second support ledge **32** extends generally horizontally along the top surface of lower housing **18** adjacent the left side **28** thereof. It will be seen that support ledges **30** and **32** are positioned and configured to support the lower arms of operating handle **14** when moved to the fully collapsed position. Although support ledges **30** and **32** are shown extending along the entire length of lower housing **18**, it will be understood that this is not required.

Operating handle **14** includes a lower handle **34** having a pair of spaced lower arms **36** and **38**. Lower arms **36** and **38** are preferably disposed generally parallel to each other, and may have a slight inward taper at their upper ends (i.e., the ends distal from the base assembly **12**), as shown in FIG. **1**. Of course, lower arms **36** and **38** also may be curved or bent and may project at angles relative to one another. Operating handle **14** also includes an upper handle **40** having a pair of spaced upper arms **42** and **44** that extend upwardly and outwardly from an intermediate yoke **46**. Upper arms **42** and **44** are connected together at their upper ends to form a transversely extending hand grip **48**, which may be grasped by a user during operation of device **10**. Although the transverse hand grip **48** design is preferred because it provides improved leverage and control over conventional one-hand grips, a one-hand grip also may be used with the present invention, as shown with reference to FIGS. **18**–**23**.

It should be understood that lower handle **34** and upper handle **40** are each preferably formed as two separate clamshell parts or halves (such as the first half **46***a* and the second half **46***b* of yoke **46** in FIG. **5**) that are connected together in any suitable manner, although they could of course be formed as integral parts. Also, lower handle **34** and upper handle **40** may be formed of any rigid material, and are preferably formed of a material that provides high

strength with low weight, such as conventional structural plastic materials, aluminum, and the like.

A switch **50** is located on hand grip **48** to facilitate easy control of the various power-driven components located within base housing **16**, such as an agitator, pump motor and suction motor. These components are described in more detail elsewhere herein. Switch **50** may be located in the center of the transverse grip **48**, as shown, or may be located to the sides. In a preferred embodiment, switch **50** comprises a 3-position rocker switch that turns the device off in its first position, activates a vacuum source in its second position, and activates a vacuum source and a floor agitator in its third position. In other embodiments, multiple different independent switches may instead be used to activate the vacuum source and floor agitator, and such switches may be located together or separately from one another. Switch **50** also may be supplemented with a pushbutton (not shown) that electrically or mechanically activates a fluid deposition system that deposits cleaning fluid onto the floor. As is known in the art, a power cord (not shown) interconnects switch **50** to the power-driven components. Preferably, operating handle **14** is hollow to permit the power cord to be encased therein. It should be understood that the power cord has enough slack to allow operating handle **14** to be moved between the extended position (as shown in FIG. **1**) and the collapsed position (as shown in FIGS. **10** and **11**).

Referring now to FIG. **2**, it can be seen that lower arms **36** and **38** of lower handle **34** are pivotally connected at their lower ends to opposite sides of upper housing **20** at the rear of base assembly **12**. Lower handle **34** includes a lower cross member **52** (shown in cross-section in FIGS. **3** and **4**) that is generally tubular in shape and extends transversely between the lower ends of lower arms **36** and **38** within upper housing **20**, as shown in phantom lines in FIG. **2**. One end of lower cross member **52** is rigidly connected to the lower end of lower arm **36**, and the other end of lower cross member **52** is rigidly connected to the lower end of lower arm **38**. As such, pivotal movement of lower arms **36** and **38** causes rotation of cross member **52**.

Referring now to FIGS. **3** and **4**, a lower lock **54** is provided that is moveable between a locked position to prevent pivotal movement of lower handle **34** relative to base assembly **12** (as shown in FIG. **3**) and a released position to allow pivotal movement of lower handle **34** relative to base assembly **12** (as shown in FIG. **4**). Lower lock **54** has a pocket **56** formed in lower cross member **52** and a spring-biased lever **58** that cooperate together to form the lower lock. Lever **58** is pivotally connected to base assembly **12** at a pivot point **60** and includes a locking lug **62** that is aligned to be engaged within pocket **56**. Lever **58** also includes a handle release pedal **64** that projects outwardly from the rear of base assembly **12** (see FIG. **2**).

When lower lock **54** is in the locked position, lever **58** is biased upwardly under the action of a spring (not shown) and locking lug **62** is engaged within pocket **56**. As such, lower handle **34** is fixed to base assembly **12** in an upright position and cannot be pivoted relative thereto. This locked position is shown in FIG. **1**, and is useful for holding the handle **14** in place when the user is preparing to use the device **10**, and also may be used to pull back on the handle **14** to thereby lift the front end of the device to convey it by its wheels **11** over obstacles such as carpet edges and the like. To move lower lock **54** to the released position, handle release pedal **64** may be depressed (such as with a user's foot) so as to pivot lever **58** in the direction of arrow A (see FIG. **3**) against the bias of the spring. When handle release pedal **64** is depressed, locking lug **62** is disengaged from pocket **56** to thereby permit rotation of cross member **52** in either of directions B or C (see FIG. **4**). As such, lower handle **34** may be pivoted relative to base assembly **12** to either fold handle **14** forward (direction B) to collapse handle **14**, or lean handle **14** back (direction C) to operate the device. Lower cross member **52** may also have a second pocket (not shown) located elsewhere on its surface to engage with the locking lug **62** when the lower handle **34** is pivoted to another position. For example, a second pocket may be provided to lock lower handle **34** in the collapsed position, as it is shown in FIGS. **10** and **11**.

Lower cross member **52** also may have a cam surface (not shown) that actuates an override switch (not shown) to deactivate switch **50** when lower handle **34** is folded forward to prevent operation of the device when it is collapsed. The override switch may fully or partially disable device **10**. In a preferred embodiment, when handle **14** is collapsed, an override switch disables operation of a floor agitator located in base housing **16**, but allows operation of a vacuum source, to thereby allow device **10** to operate as a canister-like device.

Although the lower lock system described herein with reference to FIGS. **2–4** is preferred, other locking systems may be used with device **10** to pivotally lock lower handle **34** relative to base housing **16** in one or more locking positions, as will be appreciated by those of ordinary skill in the art. Furthermore, the lower lock system may not employ a positive lock that requires a release lever to be actuated to overcome the lock, and may instead comprise a device that simply increases the pivoting resistance at one or more points, and only requires the operator to apply pressure to handle **14** to overcome the pivoting resistance.

Referring now to FIG. **5**, it can be seen that lower handle **34** includes an upper cross member **66** that is generally tubular in shape and extends transversely between the upper ends of lower arms **36** and **38**. One end of upper cross member **66** is rigidly connected to the upper end of lower arm **36**, and the other end of upper cross member **66** is rigidly connected to the upper end of lower arm **38**. As can be seen, yoke **46** of upper handle **40** includes a first half **46***a* and a second half **46***b* that are configured to clamshell around upper cross member **66**. As such, yoke **46** is pivotally connected to upper cross member **66** to thereby allow pivotal movement of upper handle **40** relative to lower handle **34**. Preferably, yoke **46** and lower handle **34** have engaging surfaces (not shown) to prevent upper handle **40** from being over-rotated relative to lower handle **34**.

Referring now to FIGS. **5–9**, an upper lock **68** is provided that is moveable between a locked position (as shown in FIG. **8**) to prevent pivotal movement of upper handle **40** relative to lower handle **34** and a released position (as shown in FIG. **9**) to allow pivotal movement of upper handle **40** relative to lower handle **34**. As will now be described, upper lock **68** comprises a slide lock **70**, locking rings **72** and **74**, and a twist lever **76** that cooperate together to form the upper lock **68**.

As best shown in FIG. **7**, slide lock **70** of upper lock **68** includes a slide body **78** that is configured to be captured between the yoke **46** and the upper cross member **66**. As can be seen, slide body **78** has an upper edge **80** and a lower edge **82** that fit into a rectangular slot in yoke **46** such that slide body **78** can slide back and forth relative to yoke **46**, but can not rotate in yoke **46**. Slide body **78** also has two curved surfaces **81**, **83** that abut and upper cross member **66** and allow slide body **78** to rotate about and slide axially along upper cross member **66**.

Slide body **78** also includes a plurality of generally square-shaped tabs **84**, **86**, **88**, **90** that extend inwardly toward upper cross member **66**. Although four tabs have been shown in the illustrated embodiment, it should be understood that any number of tabs may be used, and the tabs may have shapes other than square shapes.

Slide lock **70** also includes two spring retainer posts **92** and **94** that project outwardly from the side of slide body **78**. Mounted on spring retainer posts **92** and **94** are two coil compression springs **96** and **98**, respectively, that are biased to urge slide body **78** in the direction of arrow D (see FIG. **7**) to the locked position. Springs **96** and **98** are seated within two U-shaped spring stops **100** and **102**, respectively, so as to maintain springs **96** and **98** on spring retainer posts **92** and **94**. Spring stops **100** and **102** are attached to, or formed integrally with, the inner surface of first half **46***a* of yoke **46** at the appropriate position so as to surround springs **96** and **98** and spring retainer posts **92** and **94** when assembled.

As best shown in FIGS. **8** and **9**, locking rings **72** and **74** of upper lock **68** are each rigidly connected around and may be integrally formed with upper cross member **66** of lower handle **34**. Locking ring **72** has two notches **104** and **106** formed therein that are circumferentially spaced to engage tabs **84** and **86**, respectively, of slide lock **70**. Similarly, locking ring **74** has two notches **108** and **110** formed therein that are circumferentially spaced to engage tabs **88** and **90**, respectively, of slide lock **70**. It should be noted that retainer posts **92** and **94**, springs **96** and **98** and spring stops **100** and **102** have been removed from FIGS. **8** and **9** for ease of illustration.

As best shown in FIGS. **6** and **7**, twist lever **76** of upper lock **68** comprises a twist handle **112** that is rigidly connected to an actuation pawl **114**. Twist lever **76** is mounted to upper handle **40** such that twist handle **112** projects outwardly through an opening formed in first half **46***a* of yoke **46** (see FIG. **1**) and actuation pawl **114** is positioned within a recess **116** formed in slide body **78** of slide lock **70**. Twist handle **112** may be rotated by a user to cause pivotal movement of actuation pawl **114** about the center of twist handle **112**. Twist lever **76** may also have a bias spring (not shown) attached thereto to hold the actuation pawl **114** against one side of recess **116** to prevent it from rattling in the recess and to ensure that twist handle **112** returns to its original position when not being used.

When upper lock **68** is in the locked position, slide lock **70** is biased in the direction of arrow D (see FIG. **7**) by springs **96** and **98**. In this position, tabs **84**, **86**, **88** and **90** of slide lock **70** are engaged within notches **104**, **106**, **108** and **110**, respectively, of locking rings **72** and **74** (as shown in FIG. **8**). As such, upper handle **40** is fixed to lower handle **34** in an upright position and cannot be pivoted relative thereto. The tabs and/or the notches may be provided with a slight taper so that they self-tighten when they engage to reduce any play that may be present in the lock. To move upper lock **68** to the released position, twist handle **112** may be rotated by a user in the direction of arrow E (see FIG. **6**), whereby actuation pawl **114** engages the edge of recess **116** and moves slide lock **70** against the bias of springs **96** and **98** in the direction of arrow F (see FIG. **6**). In this position, tabs **84**, **86**, **88** and **90** of slide lock **70** have disengaged notches **104**, **106**, **108** and **110**, respectively, of locking rings **72** and **74** (as shown in FIG. **9**). As such, upper handle **40** may be pivoted relative to lower handle **34**. It will be understood that locking rings **72** and **74** may also have a second set of notches (not shown) into which tabs **84**, **86**, **88** and **90** engage when upper handle **40** is fully folded relative to lower handle **34**, to thereby lock handle **14** in the folded position, as shown in FIG. **11**. Similar structures may also be provided to lock the handle **14** in partially-folded positions.

Although the upper lock **68** described herein with reference to FIGS. **5**–**9** is preferred, it will be appreciated by those of ordinary skill in the art that other devices and assemblies may be employed with device **10** to pivotally lock upper handle **40** relative to lower handle **34** in one or more locked positions.

As will now be described in detail, operating handle **14** is moveable between an extended position for operation of device **10** (as shown in FIG. **1**) and a collapsed position for compact storage, shipping, and/or transportation of device **10** (as shown in FIGS. **10** and **11**).

Referring to FIG. **1**, when operating handle **14** is in the extended position, upper lock **68** is in the locked position (as shown in FIG. **8**) such that upper handle **40** is fixed to lower handle **34** in an upright position and cannot pivot relative thereto. As such, lower and upper handles **34** and **40** are maintained in a substantially rigid extended position. Generally, during use, lower lock **54** is released and operating handle **14** is tilted back towards the operator to allow easy manipulation of the device **10** in a back-and-forth motion. Handle **14** also may by pivoted into an upright position (as shown in FIG. **1**), where lower lock **54** engages (as shown in FIG. **3**) such that lower handle **34** is fixed to base assembly **12** in an upright position and cannot pivot relative thereto. This upright locked position is useful to allow device **10** to stand on its own when the operator needs to momentarily leave device **10**, such as to relocate the power cord to a different power outlet, and also allows the user to pull back on handle **14** to pivot the front end of base assembly **12** upwards to facilitate movement on wheels **11**.

Referring now to FIGS. **10** and **11**, when it is desired to move operating handle **14** to the collapsed position for storage, shipping, and/or transportation of device **10**, a user may depress handle release pedal **64** (see FIG. **2**) to move lower lock **54** to the released position (as shown in FIG. **4**) and thereby permit pivotal movement of lower handle **34** relative to base assembly **12**. The user may also rotate twist handle **112** to move upper lock **68** to the released position (as shown in FIG. **9**) and thereby permit pivotal movement of upper handle **40** relative to lower handle **34**.

When lower lock **54** and upper lock **68** are both in the released position, operating handle **14** may be moved to the fully collapsed position by folding lower handle **34** downwardly and forwardly to a position atop lower housing **18** (see FIG. **10**), and then folding upper handle **40** downwardly and backwardly to a position atop upper housing **20** (see FIG. **11**). Of course, it should be understood that operating handle **14** could alternatively be moved to the fully collapsed position by folding upper handle **40** downwardly and backwardly, and then folding lower handle **34** downwardly and forwardly to the position shown in FIG. **11**, or the folding of the upper and lower handles **40** and **34** may be done simultaneously.

When operating handle **14** is in the collapsed position, it can be seen that lower arms **36** and **38** of lower handle **34** rest on support ledges **30** and **32** of lower housing **18** and straddle upper housing **20**. Preferably, the front surfaces of lower arms **36** and **38** are in substantially continuous contact with support ledges **30** and **32**, and the inner side surfaces of lower arms **36** and **38** are in close proximity to the side surfaces of upper housing **20**. In this manner, lower arms **36** and **38** substantially conform in shape to the space provided above support ledges **30** and **32** and to the sides of upper housing **20** so that lower arms **36** and **38** may solidly rest on support ledges **30** and **32**. However, if support ledges **30** and

32 do not extend along the entire length of lower housing 18, then lower arms 36 and 38 may instead rest only partially on support ledges 30 and 32. In another embodiment, the support ledges may also be omitted entirely, and the lower arms may rest on other parts of the base assembly 12.

It can also be seen that yoke 46 of upper handle 40 rests on upper housing 20 when operating handle 14 is in the collapsed position. Preferably, the back surface of yoke 46 is in substantially continuous contact with the sloped top surface of upper housing 20. In this manner, yoke 46 substantially conforms in shape to the sloped top surface of upper housing 20 so that yoke 46 may solidly rest thereon.

In addition, when operating handle 14 is in the collapsed position, it can be seen that lower and upper handles 34 and 40 do not extend laterally from the outer periphery of base assembly 12 by any significant distance. For example, in a preferred embodiment, lower and upper handles 34 and 40 extend less than about 4 inches, and more preferably less than about 1 inch, from the outer periphery of base assembly 12. This provides a minimal footprint, as viewed from above, which facilitates storage in tight closets and other small spaces. This sizing also allows the device 10 to be shipped with corner or edge shipping supports—which increase the overall size of the base assembly's periphery—without making special accommodations for the handle, because any overhanging portions of the lower and upper handles 34 and 40 can be fitted between the shipping supports. Furthermore, in order to obtain the greatest degree of compactness for purposes of shipping and transporting the device 10, it is preferred that the overall length, width and height of the collapsed device 10 do not significantly exceed the overall length, width and height, respectively, of the base assembly 12. In these embodiments, operating handle 14 collapses so that it occupies a minimal amount of horizontal and vertical space to facilitate compact storage, shipping, and/or transportation of device 10, but can still be extended to a height and length that is comfortable for the operator during use.

It can be appreciated that device 10 offers several advantages over traditional floor cleaning devices. For example, device 10 may be compactly stored in a closet or other small space. Also, the compact design of device 10 allows it to be easily transported from one location to another (e.g., up or down a flight of stairs) by grasping a carrying handle 118 positioned on top of upper housing 20 between upper arms 42 and 44. Device 10 may also be easily transported in the trunk compartment or other area within a vehicle without having to tip the device on its side or disassemble it. In addition, device 10 may be compactly packed in a single carton for shipment to a user, whereby operating handle 14 is pre-assembled to base assembly 12 upon delivery and can be used immediately upon unpacking. Further, the compact nature of device 10 when collapsed provides better protection against damage that could be caused to device 10 during transport or shipment.

Device 10 also may be conveniently used as a canister-type cleaning device by providing an accessory outlet 119 that is accessible and usable when the device 10 is in the collapsed position. Accessory outlet 119 may comprise, for example, a simple vacuum hose connection, or a wet extractor spot cleaning attachment point. This outlet 119 may also be used when the operating handle is un the extended position.

Referring to FIG. 12, a floor cleaning device in accordance with a first alternative embodiment of the present invention is designated generally by reference numeral 210. Device 210 includes a base assembly 212 that is adapted to be guided across a floor during operation of device 210. Device 210 also includes an operating handle 214 that extends upwardly from the rear of base assembly 212. As will be described in greater detail herein, operating handle 214 is moveable between an extended position (as shown in FIG. 12) for upright operation of device 210 for use on floors or with accessory tools, and a collapsed position for use with accessory tools, compact storage, shipping, and/or transportation of device 210 (as shown in FIGS. 13 and 14).

Base assembly 212 includes a base housing 216 that surrounds or holds the various internal components of device 210, as is known in the art. Base housing 216 includes a lower housing 218 positioned adjacent the floor, and an upper housing 220 projecting above lower housing 218 that slopes upwardly from the front side to the rear side thereof. The outer periphery of lower housing 218 is formed by a front side 222, a rear side 224, a right side 226 and a left side 228, which together define the floor space occupied by base assembly 212. A first support ledge 230 extends generally horizontally along the top surface of lower housing 218 adjacent the right side 226 thereof, and a second support ledge (not shown) extends generally horizontally along the top surface of lower housing 218 adjacent the left side 228 thereof. It will be seen that support ledges 230 are positioned and configured to support the lower arms of operating handle 214 when it is moved to the collapsed position.

Operating handle 214 includes a lower handle 234 having a pair of spaced lower arms 236 and 238 disposed generally parallel to each other, which are pivotally connected at their lower ends to opposite sides of upper housing 220 at the rear of base assembly 212. The upper ends of the lower arms 236 and 238 are connected to one another by a cross-piece 246. Operating handle 214 also includes an upper handle 240 having a pair of spaced upper arms 242 and 244 disposed generally parallel to each other, which are pivotally connected at their lower ends to the upper ends of lower arms 236 and 238. Upper arms 242 and 244 may taper outwardly at their upper ends and are connected together to form a transversely extending hand grip 248, which may be grasped by a user during operation of device 210.

As shown in FIG. 12, when operating handle 214 is in the extended position, upper handle 240 is fixed to lower handle 234 and cannot pivot relative thereto. As such, lower and upper handles 234 and 240 are maintained in a substantially rigid extended position for operation of device 210. Also, lower handle 234 may be fixed to base assembly 212 in an upright position such that it cannot pivot relative thereto by using a selectively releasable lower lock. It should be understood by one skilled in the art that any suitable releasable lower lock may be used to fix lower handle 234 to base assembly 212, such as lower lock 54 shown in FIGS. 3 and 4. Likewise, any suitable releasable upper lock may be used to fix upper handle 240 to lower handle 234. As with various other embodiments described herein, the lower lock may be released to allow handle 214 to pivot backwards relative to base assembly 212 to facilitate operation, and forward to collapse handle 214.

As shown in FIGS. 13 and 14, operating handle 214 may be moved to the collapsed position by releasing the lower lock and folding lower handle 234 downwardly and forwardly to a position atop lower housing 218 (see FIG. 13), and then releasing the upper lock and folding upper handle 240 downwardly and backwardly to a position atop lower handle 234 (see FIG. 14). Of course, it should be understood that operating handle 214 could alternatively be moved to the collapsed position by folding upper handle 240 down-

wardly and backwardly, and then folding lower handle **234** downwardly and forwardly to the position shown in FIG. **14**, of both folds may be performed simultaneously.

When operating handle **214** is in the collapsed position, it can be seen that lower arms **236** and **238** of lower handle **234** rest on support ledges **230** of lower housing **218** and straddle upper housing **220**. Preferably, the front surfaces of lower arms **236** and **238** are in substantially continuous contact with support ledges **230**, and the inner side surfaces of lower arms **236** and **238** are in close proximity to the side surfaces of upper housing **220**. In this manner, lower arms **236** and **238** substantially conform in shape to the space provided above support ledges **230** and to the sides of upper housing **220** so that lower arms **236** and **238** may solidly rest on support ledges **230**.

It can also be seen that upper arms **242** and **244** of upper handle **240** are stacked on lower arms **236** and **238** and straddle upper housing **220** when operating handle **214** is in the collapsed position. Preferably, the back surfaces of upper arms **242** and **244** are in substantially continuous contact with the back surfaces of lower arms **236** and **238** so that upper arms **242** and **244** may solidly rest on lower arms **236** and **238**.

In addition, when operating handle **214** is in the collapsed position, it can be seen that lower and upper handles **234** and **240** are substantially contained within the outer periphery of base assembly **212**. As such, operating handle **214** occupies a minimal amount of horizontal and vertical space to facilitate compact storage, shipping, and/or transportation of device **210**. Furthermore, handle **219** may be readily grasped to convey the device **210** while it is in the collapsed configuration.

Referring to FIG. **15**, a floor cleaning device in accordance with a second alternative embodiment of the present invention is designated generally by reference numeral **310**. Device **310** includes a base assembly **312** that is adapted to be guided across a floor during operation of device **310**. Device **310** also includes an operating handle **314** that extends upwardly from the rear of base assembly **312**. As will be described in greater detail herein, operating handle **314** is moveable between an extended position for operation of device **310** (as shown in FIG. **15**) and a collapsed position for compact storage, shipping, and/or transportation of device **310** (as shown in FIGS. **16** and **17**).

Base assembly **312** includes a base housing **316** that surrounds or otherwise holds the various internal components of device **310**, as is known in the art. Base housing **316** includes a lower housing **318** positioned adjacent the floor, and an upper housing **320** projecting above lower housing **318** that slopes upwardly from the front side to the rear side thereof. The outer periphery of lower housing **318** is formed by a front side **322**, a rear side **324**, a right side **326** and a left side **328**, which together define the floor space occupied by base assembly **312**. A first support ledge (not shown) extends generally horizontally along the top surface of lower housing **318** adjacent the right side **326** thereof, and a second support ledge **332** extends generally horizontally along the top surface of lower housing **318** adjacent the left side **328** thereof. It will be seen that support ledges **332** are positioned and configured to support the lower arms of operating handle **314** when it is moved to the collapsed position.

Operating handle **314** includes a lower handle **334** having a pair of spaced lower arms **336** and **338** disposed generally parallel to each other, which are pivotally connected at their lower ends to opposite sides of upper housing **320** at the rear of base assembly **312**. Operating handle **314** also includes an upper handle **340** having a pair of spaced upper arms **342** and **344** disposed generally parallel to each other, which are telescopically connected at their lower ends to the upper ends of lower arms **336** and **338**. The outer diameter of upper arms **342** and **344** is slightly smaller than the inner diameter of lower arms **336** and **338** such that upper arms **342** and **344** may be telescoped within lower arms **336** and **338**. Upper arms **342** and **344** taper outwardly at their upper ends and are connected together to form a transversely extending hand grip **348**, which may be grasped by a user during operation of device **310**.

As shown in FIG. **15**, when operating handle **314** is in the extended position, upper handle **340** is fixed to lower handle **334** such that it cannot be telescoped therein. As such, lower and upper handles **334** and **340** are maintained in a substantially rigid extended position for operation of device **310**. Also, lower handle **334** may be fixed to base assembly **312** in an upright position so that it cannot pivot relative thereto, to allow handle **314** to stand upright. Handle **314** may be pivoted backwards, as described elsewhere herein, to operate the device **310**, while upper handles **340** remain telescopically fixed relative to lower handles **334**. It should be understood by one skilled in the art that any suitable releasable lower lock may be used to pivotally fix lower handle **334** to base assembly **312**, such as lower lock **54** shown in FIGS. **3** and **4**. Likewise, any suitable releasable upper lock may be used to telescopically fix upper handle **340** to lower handle **334**, such as a rack-and-pinion type lock or any other suitable device.

As shown in FIGS. **16** and **17**, operating handle **314** may be moved to the collapsed position by releasing the upper lock and telescoping upper arms **342** and **344** into lower arms **336** and **338** (see FIG. **16**), and then releasing the lower lock and folding lower handle **334** downwardly and forwardly to a position atop lower housing **318** (see FIG. **17**). Of course, it should be understood that operating handle **314** could alternatively be moved to the collapsed position by folding lower handle **334** downwardly and forwardly, and then telescoping upper arms **342** and **344** into lower arms **336** and **338** to the position shown in FIG. **17**, or the folding and telescoping steps may be performed simultaneously.

When operating handle **314** is in the collapsed position, it can be seen that lower arms **336** and **338** (with upper arms **342** and **344** telescoped therein) rest on support ledges **332** of lower housing **318** and straddle upper housing **320**. Preferably, the front surfaces of lower arms **336** and **338** are in substantially continuous contact with support ledges **332**, and the inner side surfaces of lower arms **336** and **338** are in close proximity to the side surfaces of upper housing **320**. In this manner, lower arms **336** and **338** substantially conform in shape to the space provided above support ledges **332** and to the sides of upper housing **320** so that lower arms **336** and **338** may solidly rest on support ledges **332**.

In addition, when operating handle **314** is in the collapsed position, it can be seen that lower and upper handles **334** and **340** are substantially contained within the outer periphery of base assembly **312**. As such, operating handle **314** occupies a minimal amount of horizontal and vertical space to facilitate compact storage, shipping, and/or transportation of device **310**. Furthermore, handle **319** is readily accessible to use to transport device **310** when it is in the collapsed position. It will be apparent from FIG. **17** that the device may also be stored on its rear side **324** if it is flat or provided with support members. This vertical storage feature may also be provided with the other embodiments described herein.

Referring to FIG. **18**, a floor cleaning device in accordance with a third alternative embodiment of the present

invention is designated generally by reference numeral **410**. Device **410** includes a base assembly **412** that is adapted to be guided across a floor during operation of device **410**. Device **410** also includes an operating handle **414** that extends upwardly from the rear of base assembly **412**. As will be described in greater detail hereinbelow, operating handle **414** is moveable between an extended position for operation of device **410** (as shown in FIG. **18**) and a collapsed position for compact storage, shipping, and/or transportation of device **410** (as shown in FIGS. **19** and **20**).

Base assembly **412** includes a base housing **416** that surrounds or carries the various internal components of device **410**, as is known in the art. Base housing **416** includes a lower housing **418** positioned adjacent the floor, and an upper housing **420** projecting above lower housing **418** that slopes upwardly from the front side to the rear side thereof. The outer periphery of lower housing **418** is formed by a front side **422**, a rear side **424**, a right side **426** and a left side **428**, which together define the floor space occupied by base assembly **412**. A first support ledge **430** extends generally horizontally along the top surface of lower housing **418** adjacent the right side **426** thereof, and a second support ledge (not shown) extends generally horizontally along the top surface of lower housing **418** adjacent the left side **428** thereof. It will be seen that support ledges **430** are positioned and configured to support the lower arms of operating handle **414** when moved to the collapsed position.

Operating handle **414** includes a lower handle **434** having a pair of spaced lower arms **436** and **438** that taper inwardly to a pivot point **440**. Lower arms **436** and **438** are pivotally connected at their lower ends to opposite sides of upper housing **420** at the rear of base assembly **412**. Operating handle **414** also includes an upper handle **442** having a single upper arm **444**, which is pivotally connected at its lower end to pivot point **440**. Upper arm **444** has a hand grip **446** formed at its distal end, which may be grasped by a user during operation of device **410**.

As shown in FIG. **18**, when operating handle **414** is in the extended position, upper handle **442** may be fixed to lower handle **434** such that it cannot pivot relative thereto. During use, the entire handle **414** may be pivoted relative to the base assembly **412**. Alternatively, lower handle **434** may be fixed to the base assembly **412** in an upright position and upper handle **442** may pivot relative to lower handle **434** during use. Of course, both upper and lower handles **442** and **434** may be adapted to be locked in pivotally fixed positions, if desired. It should be understood by one skilled in the art that any suitable releasable lower lock may be used to fix lower handle **434** to base assembly **412**, such as lower lock **54** shown in FIGS. **3** and **4**. Likewise, any suitable releasable upper lock may be used to fix upper handle **442** to lower handle **434**.

As shown in FIGS. **19** and **20**, operating handle **414** may be moved to the collapsed position by releasing the lower lock and folding lower handle **434** downwardly and forwardly to a position atop lower housing **418** (see FIG. **19**), and then releasing the upper lock and folding upper handle **442** downwardly and backwardly to a position atop upper housing **420** (see FIG. **20**). Of course, it should be understood that operating handle **414** could alternatively be moved to the collapsed position by folding upper handle **442** downwardly and backwardly, and then folding lower handle **434** downwardly and forwardly to the position shown in FIG. **20**, or such folding can be done simultaneously.

When operating handle **414** is in the collapsed position, it can be seen that lower arms **436** and **438** of lower handle **434** rest on support ledges **430** of lower housing **418** and straddle upper housing **420**. Preferably, the front surfaces of lower arms **436** and **438** are in substantially continuous contact with support ledges **430**, and the inner side surfaces of lower arms **436** and **438** are in close proximity to the side surfaces of upper housing **420**. In this manner, lower arms **436** and **438** substantially conform in shape to the space provided above support ledges **430** and to the sides of upper housing **420** so that lower arms **436** and **438** (or ledges (not shown) on the inward-facing sides thereof) may solidly rest on support ledges **430**. It can also be seen that hand grip **446** of upper handle **440** rests on upper housing **420** when operating handle **414** is in the collapsed position. Preferably, upper arm **444** has a slight curvature that allows it to conform in shape to the sloped top surface of upper housing **420**.

In addition, when operating handle **414** is in the collapsed position, it can be seen that lower and upper handles **434** and **442** do not extend laterally from the outer periphery of base assembly **412**. As such, operating handle **414** occupies a minimal amount of horizontal and vertical space to facilitate compact storage, shipping, and/or transportation of device **410**. Furthermore, hand grip **446** provides a convenient carrying handle that can be used when device **410** is collapsed, provided upper and lower handles **442**, **434** can be fixed in the folded position by the upper and lower locks.

Referring to FIG. **21**, a floor cleaning device in accordance with a fourth alternative embodiment of the present invention is designated generally by reference numeral **510**. Device **510** includes a base assembly **512** that is adapted to be guided across a floor during operation of device **510**. Device **510** also includes an operating handle **514** that extends upwardly from the rear of base assembly **512**. As will be described in greater detail hereinbelow, operating handle **514** is moveable between an extended position for operation of device **510** (as shown in FIG. **21**) and a collapsed position for compact storage, shipping, and/or transportation of device **510** (as shown in FIGS. **22** and **23**).

Base assembly **512** includes a base housing **516** that surrounds or holds the various internal components of device **510**, as is known in the art. Base housing **516** includes a lower housing **518** positioned adjacent the floor, and an upper housing **520** projecting above lower housing **518** that slopes upwardly from the front side to the rear side thereof. The outer periphery of lower housing **518** is formed by a front side **522**, a rear side **524**, a right side **526** and a left side **528**, which together define the floor space occupied by base assembly **512**. A recess **530** is formed in upper housing **520**, and a support surface **532** is formed on the top surface of lower housing **518** within recess **530**. It will be seen that support surface **532** is positioned and configured to support the lower arm of operating handle **514** when moved to the collapsed position.

Operating handle **514** includes a lower handle **534** having a single lower arm **536**, which is pivotally connected at its lower end to upper housing **520** at the rear of base assembly **512**. Operating handle **514** also includes an upper handle **538** having a single upper arm **540**, which is pivotally connected at its lower end to the upper end of lower arm **536**. Upper arm **540** has a hand grip **542** formed at its distal end, which may be grasped by a user during operation of device **510**.

As shown in FIG. **21**, when operating handle **514** is in the extended position, upper handle **538** is fixed to lower handle **534** and cannot pivot relative thereto. As such, lower and upper handles **534** and **538** are maintained in a substantially rigid extended position for operation of device **510**. In addition, lower handle **534** may be selectively fixed to base assembly **512** in an upright position and such that it cannot

pivot relative thereto. Of course, handle **514** may be pivoted backwards at its junction with the base assembly **512** during use to accommodate the back-and-forth movement of the device **510**. It should be understood by one skilled in the art that any suitable releasable lower lock may be used to fix lower handle **534** to base assembly **512**. Likewise, any suitable releasable upper lock may be used to fix upper handle **538** to lower handle **534**.

As shown in FIGS. **22** and **23**, operating handle **514** may be moved to the collapsed position by releasing the lower lock and folding lower handle **534** downwardly and forwardly to a position atop housing **516** (see FIG. **22**), and then releasing the upper lock and folding upper handle **538** downwardly and backwardly to a position atop lower handle **534** (see FIG. **23**). Of course, it should be understood that operating handle **514** could alternatively be moved to the collapsed position by folding upper handle **538** downwardly and backwardly, and then folding lower handle **534** downwardly and forwardly to the position shown in FIG. **23**, or these folding motions can be performed simultaneously.

When operating handle **514** is in the collapsed position, it can be seen that lower arm **536** rests on support surface **532** of lower housing **518** within recess **530** of upper housing **520**. Preferably, the front surface of lower arm **536** is in substantially continuous contact with support surface **532**, and the outer side surfaces of lower arm **536** are in close proximity to the side surfaces of recess **530**. In this manner, lower arm **536** substantially conforms in shape to the space provided above support surface **532** within recess **530** so that lower arm **536** may solidly rest on support surface **532**. It can also be seen that hand grip **542** of upper handle **538** rests on lower arm **536** when operating handle **514** is in the collapsed position.

In addition, when operating handle **514** is in the collapsed position, it can be seen that lower and upper handles **534** and **538** do not extend laterally from the outer periphery of base assembly **512**. As such, operating handle **514** occupies a minimal amount of horizontal and vertical space to facilitate compact storage, shipping, and/or transportation of device **510**. Furthermore, hand grip **542** provides a convenient lifting handle, provided upper and lower handles **540**, **536** are lockable in the collapsed position.

Another aspect of the present invention is directed towards a novel arrangement of supply and recovery tanks in a wet extractor. In a preferred embodiment, the present invention provides a recovery tank having a tank inlet for receiving air and waste water, a tank outlet for evacuating air, interior wall surfaces defining a waste water reservoir, exterior wall surfaces defining an outer periphery of the recovery tank, and a generally downward sloped inlet conduit having an upper wall, a lower wall and side walls. The exterior wall surfaces may be adapted to slidably engage with an extractor housing. The recovery tank may also have a unique float assembly, filter chamber, airflow and baffling systems, and other features, as described herein. In other preferred embodiments, the invention also provides a supply tank that is shaped to increase its ease of use and is slidably received in the extractor housing. The supply and recovery tanks may beneficially be located laterally relative to one another to provide a compact and functional design that maintains the overall weight of the device in approximately the same location throughout use of the device.

A wet extractor employing one embodiment of the novel tank configuration is shown in FIG. **24**, in which a wet extractor **2410** approximately of the design shown in FIG. **1** is shown with various components removed from the wet extractor **2410**. The wet extractor **2410** comprises a housing **2412**, a supply tank **2414** and a recovery tank **2416**. Supply tank **2414** and recovery tank **2416** are each preferably formed from a transparent material so that their contents can be readily determined. Wet extractor **2410** also may be provided with a detergent tank **2418** (also preferably a transparent material) so that the operator does not have to manually mix detergent and water in supply tank **2414**. In addition, recovery tank **2416** may be equipped with a removable float assembly **2420**, which is more clearly shown in FIGS. **27**A–B, or may have an integral float assembly.

Supply tank **2414** and recovery tank **2416** are slidably engageable with housing **2412**. Preferably, supply tank **2414** and recovery tank **2416** are individually removable, but they may be joined together to be removable as a unit, either by integrally forming the tanks or by attaching a common handle to both. In the embodiment of FIG. **24**, supply tank **2414** slides into opening **2422** and recovery tank **2416** slides into opening **2424**. Tanks **2414** and **2416** may be shaped so that they do not fit into the wrong opening **2422** and **2424**. Openings **2422** and **2424** comprise pockets formed in housing **2412** that retain supply tank **2414** and recovery tank **2416** in both the longitudinal direction and the lateral direction. It is preferred for openings **2422** and **2424** to have essentially vertical side walls so that tanks **2414** and **2416** are removable in a direction orthogonal to the floor, but openings **2422** and **2424** may be angled somewhat relative to the ground so that tanks **2414** and **2416** are pulled out at an angle relative to the floor. Openings **2422** and **2424** (or the tanks) also may be tapered to help align tanks **2414** and **2416** as they are being inserted. In this configuration, tanks **2414** and **2416** are securely held in housing **2412**, but are selectively removable by simply sliding them upwards out of housing **2412**. Although it is preferred that housing **2412** has a separate opening for each tank, as shown in FIG. **24**, it is also envisioned that supply tank **2414** and recovery tank **2416** can be inserted into a single continuous opening or that the openings be otherwise joined to one another.

In the embodiment of FIG. **24**, housing **2412** is adapted to be moved (or move under the device's own motive power, if a drive motor is provided) on a surface to be cleaned on wheels **2434** located at the rear part of housing **2412**. The front part of housing **2412** rests on an inlet slit **2440** that leads into inlet nozzle **2432**. Inlet slit **2440** is preferably formed as a narrow elongated slot between inlet nozzle **2432** on one side and housing **2412** on the other side, but may be entirely formed by housing **2412** or inlet nozzle **2432**. In one embodiment, inlet nozzle **2432** comprises a transparent removable cover that can be removed by an operator to be cleaned. Preferably such a removable nozzle **2432** can be removed without the use of tools, as described elsewhere herein. Inlet nozzle **2432** provides a fluid communication path between inlet slit **2440** and recovery tank **2416**. Inlet nozzle **2432** may have a rounded or ramped surface protruding forward of housing **2412** to help slide housing **2412** across the surface to be cleaned, as will be understood by those of ordinary skill in the art. While it is preferred for the weight of housing **2412** to be distributed primarily between wheels **2434** and the portions of inlet nozzle **2432** and housing **2412** that form inlet slit **2440**, it is also possible for the agitator (if used), additional wheels (if used), or other surfaces on the bottom of housing **2412** to bear some of the weight of housing **2412**.

In a preferred embodiment, supply tank **2414** and recovery tank **2416** are located in front of the pivot axis **2401** of handle **2402** and are laterally juxtaposed relative to the longitudinal axis of housing **2412**. In this embodiment, tanks

2414 and 2416 are also preferably generally positioned between inlet slit 2440 and wheels 2434 to distribute their weight approximately between them. Housing 2412 forms a vertical rib 2430 that extends between tanks 2414 and 2416, and may be provided with a carry handle 2444 that can be used to lift and move wet extractor 2410. Inlet nozzle 2432 extends backwards and is located, at least in part, atop vertical rib 2430. Inlet nozzle terminates at a nozzle outlet 2442, and outlet 2442 is positioned adjacent a corresponding recovery tank inlet 2712 (FIG. 27A) when recovery tank 2416 is installed. In this embodiment, recovery tank 2416 also has an outlet that abuts vacuum source opening 2428 when the recovery tank 2416 is installed to thereby connect recovery tank 2416 in fluid communication between inlet nozzle 2432 and a vacuum source. Rib 2430 may also be provided with an accessory tool attachment port 2446 (shown covered by a door) that provides a fluid communication path to recovery tank 2416 when opened. A preferred accessory tool attachment system is described elsewhere herein, and other such systems are known in the art.

Wet extractor 2410 is also provided with a fluid deposition assembly (not shown in FIG. 24) that receives liquid from supply tank 2414 (and detergent tank 2418, if used) and deposits the liquid on the surface to be cleaned. A preferred deposition assembly is described elsewhere herein, and other deposition assemblies are known in the art. Such fluid deposition assemblies generally include a valve assembly that is used to control the flow of liquid, and a nozzle that is directed to spray or trickle fluid onto the surface to be cleaned. A pump also may be provided to pressurize the liquid, and a heater or steam generator may be provided to heat the liquid. In a preferred embodiment, at least the valve assembly portion of the fluid deposition system is conveniently located in rib 2430.

The preferred configuration of FIG. 24, in which tanks 2414 and 2416 are laterally juxtaposed around a central rib 2430, has been discovered to provide an extremely compact design that does not sacrifice any of the functionality of the wet extractor 2410. Furthermore, this configuration does not require any of the main components to be located in operating handle 2402 (although operating switches preferably are conveniently placed in operating handle 2402). Some or all of the liquid management and deposition system, which is preferably a liquid management assembly as described herein, can be housed entirely within central housing rib 2430 between supply tank 2414 and recovery tank 2416; intake nozzle 2432 is conveniently located on top of central housing rib 2430; and the vacuum source and motors and other power and drive gear (if used), water heaters (if used) and the like, are readily located in the back of housing 2412 behind supply tank 2414 and recovery tank 2416 to localize their weight over wheels 2434.

In the pocketed configuration of the present invention, tanks 2414 and 2416 are retained in the housing, at least in part, by their own weight. The security of the tanks' engagement with the pockets can be increased by shaping them such that tanks 2414 and 2416 fit snugly into their respective pockets 2422 and 2424. Another way to improve the engagement between tanks 2414 and 2416 with pockets 2422 and 2424 is to form them to "snap" into one another. For example, each opening may be provided with a slight protrusion that fits into a corresponding snap detent 2830 on the side of the part that fits therein, or vice-versa. Of course, snap engagement can be provided by any other structure that causes one part to have a slight interference fit, at least during engagement, with the part with which it is being engaged. The interfering structures may be positioned to firmly hold the parts together when they are fully engaged, or may allow some play between the parts, depending on the desired design and the tolerances of the parts.

The use of sliding and snap engagement in the present invention provides numerous advantages. For example, this configuration is simple and intuitive to operate and eliminates the need for mechanical fasteners, such as locking levers or latches. Such mechanical fasteners increase the cost of manufacture, can be difficult to understand and operate and are subject to breaking. In addition, supply tank 2414 and recovery tank 2416 are preferably positioned in housing 2412 to be removable when the operating handle 2402 (or the lower portion thereof, if operating handle 2402 is collapsible) is in the upright resting position, as shown in FIG. 1. This eliminates the inconvenience of having to tilt operating handle 2402 back to access tanks 2414 and 2416, as required in prior art devices. When the operating handle 2402 is a folding handle, the tanks may be constructed to be removable even during various stages of folding, or when the operating handle is completely folded, as shown in FIGS. 13, 14, 16, 17, 19, 22 and 23. Still another advantage of this construction is that tanks 2414 and 2416 are removable without having to remove housing covers, shrouds or other encasing or covering structures. As used herein, the term "upright resting position" includes any position in which a device's handle will remain upright when unattended, and includes, but is not limited to, configurations in which the handle has a lower lock, as described elsewhere herein, has a friction stop or rests by abutting part of the lower housing.

Detergent tank 2418 and removable float assembly 2420, if provided, may be adapted to slidably engage with housing 2412 in a manner similar to that described with respect to tanks 2414 and 2416. Alternatively, detergent tank 2418 and/or removable float assembly 2420 may be adapted to slidably engage with supply tank 2414 and recovery tank 2416, respectively, in which case detergent tank 2418 may be removable with supply tank 2414 as a unit and removable float assembly 2420 may be removable with recovery tank 2416 as a unit. In the embodiment of FIG. 24, detergent tank 2418 fits into its own separate opening (not visible) and removable float assembly 2420 fits into recovery tank 2416, as described with reference to FIGS. 27A–C. In another embodiment, removable float assembly 2420 may slide partly into recovery tank 2416, and partly into opening 2428 to provide a vacuum passage between the vacuum source and recovery tank 2416.

Supply tank 2414 and detergent tank 2418 have fill caps 2415 and 2419, respectively, that are removable to fill the tanks with fluid. In order to provide fluid passages between supply tank 2414 and detergent tank 2418 and the device 2410, opening 2422 and the detergent tank opening have dry-break valve assemblies (such as shown as supply tank receptacle 3060 in FIG. 30B) that mate with corresponding valve assemblies (see, e.g., 2810 in FIGS. 28A–B) on the bottoms of supply tank 2414 and detergent tank 2418. Such dry-break valves are known in the art, and typically comprise a simple spring-biased rubber plug that closes when the valve is disengaged from housing 2412 and is opened by a pin (3062 in FIG. 30B) mounted in housing 2412 when engaged. A rubber seal typically surrounds either the pin or the plug to provide a water-tight seal around the valve assembly.

Supply tank 2414 and recovery tank 2416 each have an integrally formed handle 2436 and 2438, respectively, to facilitate their removal, carrying and installation. Integral handles 2436 and 2438 are formed directly in the exterior

walls of the tanks **2414** and **2416**, and require no additional parts or assemblies. As such, integral handles **2436** and **2438** are substantially stronger than attached handles, less expensive to produce, and more convenient to use. The additional strength of integral handles **2436** and **2438** is particularly advantageous when tanks **2414** and **2416** are held in firm snap engagement with housing **2412**, because there is no risk that handles **2436** and **2438** will separate from tanks **2414** and **2416** during removal from housing **2412**. Handles **2436** and **2438** also may be provided with a textured or rubberized grip surface. While the handles **2436**, **2438** are preferably deep enough that a typical user's fingers can nest in them to facilitate lifting and holding each tank solely by the handle, one or both of tanks **2414** and **2416** also may have grip detents **2437** and **2764** (FIG. **27**A) positioned opposite integral handles **2436** and **2438** to help the operator grip the tanks. When tanks **2414** and **2416** are installed, their grip detents **2437** may also serve as snap detents by engaging with corresponding protrusions on housing **2412** to hold tanks **2414** and **2416** in snap engagement with housing **2412**.

Referring now to FIGS. **25** and **26**, two additional embodiments of supply and recovery tanks **2414** and **2416** are shown. In the embodiment of FIG. **25**, integral handles **2436** and **2438** are longitudinally oriented in supply tank **2414** and recovery tank **2416**, respectively. In the embodiment of FIG. **26**, integral handles **2436** and **2438** are laterally oriented in supply tank **2414** and recovery tank **2416**, respectively. Of course, handles **2436** and **2438** also may be oriented at angles relative to the longitudinal or lateral directions, and handle **2436** may be oriented differently than handle **2438**.

Referring now to FIGS. **27**A, B and C, an embodiment of a recovery tank **2416** having a removable float assembly **2420** is described. Recovery tank **2416** comprises a plurality of walls having interior and exterior surfaces that form the tank **2416**. It is preferred that recovery tank **2416** has a single-wall construction, in which the walls have outward surfaces that form the exterior of tank **2416** and inward surfaces that form the interior of tank **2416**. It is also envisioned, however, that recovery tank **2416** could have a double-walled design, in which the interior and exterior surfaces are formed from different layered walls. A double-walled design may be favorable to provide insulation if the device employs heated cleaning fluid or steam. An insulating coating may alternatively be used to help insulate recovery tank **2416**. The exterior surfaces of the tank walls, particularly the lower portions thereof **2710**, are shaped to slidably engage with housing **2412**, as described previously herein. The interior surfaces of the tank walls form a waste water reservoir **2711**.

Recovery tank **2416** includes an inlet **2712** that is positioned to align with inlet nozzle outlet **2442** (FIG. **24**) to thereby be in fluid communication with inlet nozzle **2432** (FIG. **24**) of wet extractor **2410**. Recovery tank **2416** also includes an outlet **2429** that can be placed in fluid communication with opening **2428** (FIG. **24**) that leads to a vacuum source contained within housing **2412**. Outlet **2442** and/or inlet **2712** and opening **2428** may be provided with a foam or rubber sealing gasket to improve sealing. FIG. **29** shows a preferred sealing arrangement between inlet nozzle outlet **2442** and recovery tank inlet **2712**. In this embodiment, housing **2412** has a gasket **2902** positioned in a recess around outlet **2442**. Recovery tank inlet **2712** comprises a raised lip **2906** that slides over ramp **2904** and snaps into engagement with housing **2412**. This provides a good seal, and also helps hold recovery tank **2416** in snap engagement with housing **2412**.

In the embodiment of FIG. **27**A, removable float assembly forms part of the fluid communication path between outlet **2429** and the vacuum source, as shown and described in more detail with reference to FIG. **27**C. Recovery tank **2416** may also comprise a filter chamber **2714** that is located outside the waste water reservoir **2711** and proximal to outlet **2429**. Filter chamber **2714** comprises walls that form an inlet **2716** and an outlet **2718**, and is shaped to retain a filter **2720**, such as a foam or synthetic fibrous filter or other filter medium that will not deteriorate if exposed to fluid. Due to the possibility of contact with fluid and wet air, a block of synthetic open cell foam is preferred as the filter **2720**. Filter chamber outlet **2718** is placed in fluid communication, preferably along an airtight passage, with a vacuum source when recovery tank **2416** is installed in the device **2410**.

Recovery tank outlet **2429** doubles as a drain opening for emptying recovery tank **2419** when removable float assembly **2420** is removed. In a preferred embodiment, at least a portion of integral handle **2438** is positioned, with respect to a plane parallel to the surface to be cleaned, between the center of gravity of recovery tank **2416**, as measured with waste water therein, and recovery tank outlet **2429**. This measurement is shown representatively in FIG. **27**C by distance DCG between the center of integral handle **2438** and the recovery tank's center of gravity CG. The purpose of this arrangement is to encourage recovery tank outlet **2429** to tilt upwards when recovery tank **2416** is removed from housing **2412**, to thereby minimize the possibility of waste fluid spilling out of outlet **2429** during removal and transportation.

As best shown in FIGS. **27**B and **27**C, removable float assembly **2420** comprises an inlet **2722**, an outlet **2724** and a plenum **2726** providing a fluid communication path between inlet **2722** and outlet **2724**. Plenum **2726** is preferably formed from a housing **2727** having grip detents **2734** adapted to be gripped by an operator to assist with removal and installation, and is also preferably a transparent material so that an operator can monitor the operation of the device.

Removable float assembly inlet **2722** is adapted to engage with tank outlet **2429**, and float assembly outlet **2724** is adapted to engage with filter chamber inlet **2716**. A gasket **2725** may optionally be provided between removable float assembly **2420** and recovery tank **2416** to improve the vacuum seal between them. It is preferred that removable float assembly **2420** be engageable with recovery tank **2416** by snap engagement. In the embodiment shown in FIG. **27**C, removable float assembly **2420** and recovery tank **2416** are conveniently removable from housing **2412** as a single unit. When recovery tank **2416** and removable float assembly **2420** are installed in housing **2412**, the vacuum source draws the air/fluid mixture from the surface being cleaned through inlet nozzle **2432** (FIG. **24**), into recovery tank inlet **2712** (as shown by arrow "A"), through recovery tank **2416** (arrows "B" and "C") where the liquid entrained in the air is removed and settles in waste water reservoir **2711**, into plenum **2726** (arrow "D") and through filter chamber **2714** (arrow "E") to the vacuum source.

Removable float assembly **2420** has a float device **2728** incorporated therein or attached thereto. Generally speaking, the float device can be any device that detects the level of waste water in recovery tank **2416** and blocks or impedes the flow of air to the vacuum source when the level of waste water rises to a predetermined level. In the embodiment of FIG. **27**A–C, float device comprises a simple buoyant float **2730** that is slidably captured within a float cage **2732**. Float cage **2732** preferably snaps into float assembly inlet **2722** by

one or more hooks **2733**. Buoyant float **2730** comprises an upper surface **2736** that abuts a corresponding surface **2738** (FIG. **27**C) when buoyant float **2730** reaches the top of its travel, to thereby restrict or stop the air flow from recovery tank **2416** to plenum **2726** and indicate to the operator (by change in pitch of the vacuum device) that recovery tank **2716** is full.

The float device **2728** described herein comprises a simple sliding float having a sealing surface positioned directly on the float, however, other float devices may be used with the present invention. For example, the float device may instead comprise a door attached to a float by way of a linkage, post or pushrod. Furthermore, although the float device **2728** is shown being located outside plenum **2726**, it could instead be located therein. Still further, removable float assembly **2420** may be provided as a separate float device **2728** and housing **2727**. In other embodiments, recovery tank **2416** may be provided with an integral float assembly and filter (or the filter may be omitted), in which case, removable float assembly **2420** is not used.

Recovery tank **2416** is configured with various internal passages that have been found to provide efficient water separation and operation characteristics. The inlet of recovery tank **2416** comprises a downward-sloped inlet conduit **2740**, that is formed between an upper exterior wall **2742** of recovery tank **2416**, and a sloped internal wall **2744**. The sides of inlet passage **2740** are formed by exterior side walls of recovery tank **2416**. Inlet passage **2740** extends downward into recovery tank **2416** and terminates at a conduit exit **2746** proximal to the main portion of waste water reservoir **2711**. The downward slope of inlet passage **2740** prevents waste water that might cling to the interior surfaces of recovery tank **2416** from flowing backwards out of the inlet nozzle **2432** and soiling the floor when the vacuum source is off, and also moves the entrance into the reservoir **2711** as far from the suction source as possible to maximize the amount of time available to separate fluid from the airflow.

A rib **2748** is preferably provided at conduit exit **2746** to extend into inlet conduit **2740** to reduce the conduit's cross-sectional area. This reduction in area throttles the airflow and accelerates the air/fluid mixture as it exits inlet conduit **2740**. The abrupt area change before and after rib **2748** also may initiate a swirling movement in the air/fluid mixture. In various embodiments of the invention, inlet conduit **2740** is sloped downward at an angle of about 5 degrees to about 50 degrees, and more preferably about 20 degrees to about 30 degrees, as measured from the center of the conduit at the beginning of the downward slope to the center of the conduit at the conduit exit (not including the rib **2748**, if present).

Integral handle **2438** also may be formed such that the internal surfaces of the walls defining integral handle **2438** extend into inlet conduit **2740**. This also decreases the cross-sectional area of inlet conduit **2740** and throttles the air/fluid mixture as it passes therethrough. The location of integral handle **2438** between upper exterior wall **2742** and sloped interior wall **2744** also increases the strength of integral handle **2438**.

In the embodiment shown in FIGS. **27**A–C, recovery tank inlet **2712** is positioned on the side of recovery tank **2416**. In addition, recovery tank **2416** is generally elongated in the longitudinal direction and has generally parallel interior walls. Inlet conduit **2740** also extends in the longitudinal direction. In this embodiment, the air/fluid mixture recovered from the surface being cleaned enters recovery tank **2416** at approximately right angles to the longitudinal direction, and must immediately negotiate a tight turn to travel longitudinally along inlet conduit **2740** (arrow "A"), which helps separate fluid, by momentum, that is entrained in the air. Separated fluid can then flow down inlet conduit **2740** to waste water reservoir **2711**.

It is preferable, but not necessary, to orient the inlet conduit so that it extends generally away from recovery tank outlet **2429**. This helps prevent the incoming air/fluid mixture from immediately traveling to outlet **2429**, thereby "short-circuiting" the waste water reservoir **2711**. In this embodiment, a flow reversing pocket **2750**, preferably is positioned at conduit exit **2746** to cause the air/fluid mixture to rapidly negotiate a tight change in direction, as shown by arrow "B." Flow reversing pocket **2750** is preferably formed by internal wall **2752**, but may be formed by other surfaces, such as an internal surface of an exterior wall. When the air/fluid mixture negotiates this turn, the relatively heavy water tends to become separated, by its own momentum, from the air in which it is entrained. Separated water may settle on internal wall **2752**, and flow into waste water reservoir.

Inlet conduit **2740** preferably has a substantial length to thereby help prevent short-circuiting and to focus the flow of the incoming air/fluid mixture towards flow reversing pocket **2750**. In a preferred embodiment, inlet conduit **2740** has a length of at least about 1 inch, and more preferably at least about 2 inches, and most preferably at least about 3.5 inches. The length of inlet conduit is measured generally from the center of conduit exit **2746** to the nearest edge of recovery tank inlet **2712**.

After negotiating the turn created by flow reversing pocket **2750**, the air/fluid mixture passes into waste water reservoir **2711**, where it rapidly slows due to the abrupt increase in volume of reservoir **2711**. The air/fluid mixture also may undertake a complex tumbling and recirculating flow pattern when it enters and navigates through waste water reservoir **2711**, which increases the overall length of the air's flow path before it exits recovery tank **2416**. This reduction in speed and increase in flow path length gives entrained water time to precipitate out of the air and settle in reservoir **2711**.

The air, and any remaining entrained fluid, preferably exits recovery tank **2416** by way of a throttling passage **2754**. Throttling passage is most conveniently formed on the top by the bottom side of sloped internal wall **2744**, on the bottom by an additional internal wall **2756**, and on the sides by the sides of recovery tank **2416**. Of course, other wall configurations can be used instead. Throttling passage **2754** has a smaller cross section than waste water reservoir **2711**, and therefore air in throttling passage **2754** tends to accelerate as it passes therethrough. This acceleration tends to remove water entrained in the air because the relatively heavy water does not accelerate as quickly as the air. Throttling passage **2754** exits proximal to recovery tank outlet **2429**, where the air turns 90 degrees to exit recovery tank **2416**. This abrupt turn also tends to remove entrained fluid from the air, as described previously herein with reference to flow reversing pocket **2750**. In a preferred embodiment, throttling passage **2754** is located level with or above the lower wall of conduit exit **2746**, which helps prevent the air/fluid mixture from short-circuiting, and forces the air/fluid mixture to turn upwards before exiting waste water reservoir **2711**, to thereby use gravity to help pull entrained water out of the air.

Recovery tank **2416** preferably includes a baffle **2758** that extends upward from recovery tank floor **2766** and divides

waste water reservoir **2711** into a main chamber **2760** and an isolation chamber **2762**. Baffle **2758** generally extends across the entire width of recovery tank **2416**, and vertically extends to at least about the location of float **2730**. Baffle **2758** also preferably extends in a direction perpendicular, relative to a horizontal plane (i.e., as seen from above), to an imaginary line extending from the center of main chamber **2760** to tank outlet **2429** to thereby form a wall that obstructs liquid movement from the main chamber **2760** to the outlet **2429**. Baffle **2758** preferably also comprises a splash baffle **2770** that extends over main chamber **2760** to impede fluid that might otherwise splash over baffle **2758**. If recovery tank **2416** includes a throttling passage **2754**, then the throttling passage's lower wall **2756** may form splash baffle **2770**.

Fluid in main chamber **2760** can enter isolation chamber **2762** essentially only through a passage **2768** (or passages) formed near the bottom of baffle **2758**, and preferably between baffle **2758** and floor **2766**. Passage **2768** may extend across the entire width of baffle **2758**, or only a portion or portions thereof. Float device **2728** preferably extends downward into isolation chamber **2762**, and isolation chamber **2762** operates to prevent float device **2728** from being inundated with sloshing fluid whenever the wet extractor is moved backwards and forwards during operation.

Isolation chamber **2762** operates by restricting the flow rate of fluid from main chamber **2760** to isolation chamber **2762** during momentary forward and rearward longitudinal accelerations, such as those experienced when the wet extractor is moved back and forth to clean a surface. Such accelerations cause fluid in waste water reservoir **2711** (in both main chamber **2760** and isolation chamber **2762**) to move backwards and forwards, creating sloshing waves. The vertical height of the wave depends on a number of factors, including the length of the chamber, the amount of fluid in the chamber, and the magnitude of the acceleration. Generally, longer chambers produce greater wave height. Baffle **2758** and passage **2768** operate to effectively reduce the length of waste water reservoir **2711** during wave-producing accelerations, without reducing its volume. During accelerations, the small passage **2768** prevents rapid movement of fluid between isolation chamber **2762** and main chamber **2760**, and thereby effectively isolates them from one another, reducing their length and therefore the wave sizes generated in both chambers. By preventing these waves from striking float device **2728**, the present invention prevents float device **2728** from unnecessarily blocking the vacuum source during cleaning, and prevents large sloshing waves from rapidly exiting recovery tank **2416** before float device **2728** has time to close.

It has been found that passage **2768** provides beneficial performance in an approximately 0.60 gallon to one-gallon waste water reservoir, and most preferably about a 0.80 gallon waste water reservoir, when passage **2768** has an area of about 2.50 in^2 or less, and more preferably about 1.50 in^2 or less, and most preferably about 0.75 in^2 or less. These areas may vary, of course, depending on the particular shape and size of the recovery tank **2416**. Preferably, the minimum width of passage **2768** is at least about 0.125 inches, and more preferably at least about 0.500 inches, to prevent clogging. In a most preferred embodiment, passage **2768** is about 3.75 inches wide, and about 0.500 inches high, and located at the bottom of baffle **2758**.

While baffles such as those described herein are useful in many different shapes of any recovery tank, it has been found that such a baffle is particularly useful in a recovery tank, as shown in FIGS. **27**A–C, that is elongated in the longitudinal direction of the wet extractor (i.e., generally parallel to the direction in which the wet extractor is typically rolled or moved during use). As shown in FIGS. **27**A–C, recovery tank **2416** has generally parallel side walls, which are joined by front and rear interior walls, and the outlet **2429** is located near the rear interior wall. Baffle **2758** is particularly useful for preventing the formation of large waves along the relatively long longitudinal recovery tank direction in the present invention.

The various external and internal walls that form the walls and baffles described herein may be fabricated by a number of different methods. However, it has been found that the walls can be inexpensively and efficiently constructed by forming recovery tank **2416** by two halves **2772** and **2774**, as shown in FIG. **27**A, that have the walls and baffles formed integrally thereon. In FIG. **27**A walls **2744**, **2748**, **2752**, **2756** and **2758** are shown being formed integrally with housing half **2772** (wall **2744** is shown with a cutout **2776** that abuts the inner contour of integral handle **2438**). In a more preferred embodiment, walls **2744**, **2748** and **2752** are integrally formed with housing half **2774**, while walls **2756** and **2758** are formed with housing half **2772**. Housing halves **2772** and **2774** may also have grooves formed therein to receive the walls formed in the opposite housing. Housing halves **2772** and **2774** also may be provided with a tongue-and-groove fitment system in which a tongue **2778** extending around the perimeter of one housing half fits into a groove on the other housing half. Each housing half **2772** and **2774** also may be formed by an assembly of subparts that are bonded together.

It will be appreciated by those of ordinary skill in the art that the various recovery tank features described herein may be used separately or in combination, and also may be used in combination with various recovery tank features known in the art.

Referring now to FIG. **28**A, another aspect of the present invention is directed towards a unique supply tank **2414**. Supply tank **2414** may be used to provide fresh water or a mixture of water and detergent. Supply tank **2414** also may be operated in conjunction with a heater or steam generator (not shown). As with recovery tank **2416**, the exterior surfaces of the supply tank walls, particularly the lower portions thereof **2812**, are shaped to slidably engage with housing **2412**, and preferably also form an integral handle **2436** and grip detent **2437**, as described previously herein. Interior surfaces of supply tank **2414** form a fluid reservoir **2814**. Supply tank **2414** may have single walls, double walls, insulated walls, or other configurations, as will be appreciated by those of ordinary skill in the art in light of the teachings herein.

Supply tank **2414** comprises a selectively sealable inlet **2816** having a cover or, more preferably, a screw-on cap **2415**. Cap **2415** or inlet **2816** is also preferably provided with a gasket **2832** to help prevent fluid from leaking therethrough. A vent hole **2820** is located near the uppermost extent of supply tank **2414**, and may be formed in cap **2415**. Supply tank **2414** is provided with a dry-break outlet **2810**, as are known in the art, which is positioned in the lowermost wall **2822** of fluid reservoir **2814** to allow the maximum amount of fluid to be extracted from supply tank **2414** during use. Dry-break outlet **2810** is positioned to engage with a corresponding inlet located in opening **2422** when supply tank **2414** is inserted therein (see FIG. **30**B).

Dry-break outlet **2810** is shown in detail in FIG. **28**B. Outlet **2810** comprises a boot seal **2834** that surrounds a hollow central member **2836**. Boot seal **2834** is configured

to frictionally fit within a hole in the lowermost wall **2822** of supply tank **2414**, and has a skirt portion **2838** that extends downward to seal with a corresponding supply tank receptacle **3060**, such as the one shown in FIG. **30**B. A sliding valve member **2840** is disposed in the bore of hollow central member **2836**, and pre-loaded by a spring **2842** that biases valve member **2840** downward. When in this position, a rubber plug **2844** abuts the upper end of hollow central member **2836** to seal the exit from supply tank **2414**. When dry-break outlet **2810** is pushed downward into engagement with supply tank receptacle **3060**, pin **3062** pushes sliding member **3040** upwards against the spring **2842**, thereby opening the valve formed by rubber plug **2844** and permitting fluid to flow out of supply tank **2414** and into fluid inlet **3064**.

Supply tank **2414** is preferably shaped so that it has a low profile when it is oriented to be filled. This allows supply tank **2414** to be filled even when relatively little vertical room is available, as is often the case in bathroom sinks, in which the sink basin is typically shallower and the faucet is typically lower than in kitchen sinks. In order to accomplish this goal, the exterior walls of supply tank **2414** define a flattened outer periphery that has a first generally flat side **2824**, and selectively sealable inlet **2816** is located on this flattened side **2824**. The filling profile of supply tank **2414** may also be further flattened by providing another substantially flattened side **2826** opposite first flattened side **2824**, as shown in the figures. Filling of supply tank **2414** may be even further facilitated by placing selectively sealable inlet **2816** in a funnel-shaped cavity **2828**, as shown in FIG. **28**A. If such a funnel-shaped cavity is provided, the overall size of supply tank **2414** can be conveniently reduced by shaping cap **2415** to fit within cavity **2816** so that it is flush with or recessed within flattened side **2824**.

In this embodiment, supply tank **2414** is filled by removing it from housing **2412**, removing cap **2415**, turning housing **2414** on its side, and positioning inlet **2816** under a sink faucet. The narrow, flattened profile of supply tank **2414** provides substantially more clearance than typical supply tanks, and allows inlet **2816** to be positioned under faucets in sinks that have relatively shallow basins and low faucets.

Another aspect of the present invention is a unique liquid management assembly for a wet extractor. The liquid management assembly is adapted to perform one or more of various functions that control the flow of clean water, detergent and mixtures thereof in the wet extractor. Functions of the liquid management assembly may include, but are not limited to, priming, pumping, mixing and distribution of cleaning fluids such as water and detergents. It will be appreciated that any suitable fluid or fluids may be used with the present invention, and the term "detergent" includes any useful cleaning fluid, brightener, deodorant, perfume and other useful cleaning compounds. The present invention provides a compact and relatively inexpensive centralized liquid management assembly.

A first embodiment of the liquid management assembly is shown in FIG. **30**A, which is a side view of liquid management assembly **3000**. Assembly **3000** has a pump inlet **3012** that receives pressurized fluid from a conventional pump **3002**. Pump inlet **3012** leads to a flow valve chamber **3014** having a flow valve **3016** (or "power valve"), a first outlet **3024**, and a priming assembly outlet **3018**.

Primer outlet **3018** leads to a priming assembly **3019** that operates to prime pump **3002**. Such priming is useful when pump **3002** does not self-prime, as is the case in typical centrifugal pumps. Priming assembly **3019** has a float chamber **3020** in which a float **3022** is captured such that it can freely slide from the bottom of the chamber to the top. It is preferred that float chamber **3020** be vertical to reduce any friction between float **3022** and the float chamber walls. Float **3022** may be any device that will rise on fluid in float chamber **3020**, and may comprise a sealed air chamber, an inverted cup, or the like. The body of float **3022** is shaped and sized to allow air to pass between float **3022** and the walls of float chamber **3020**. Float chamber **3020** has a vent hole **3026** at its upper end that, in one embodiment, is preferably placed in fluid communication with atmospheric air. Float **3022** is provided with a sealing structure **3028** that engages with vent hole **3026** when float **3022** reaches the upper extent of its travel to thereby seal float chamber **3020** and prevent the escape of fluid. Sealing structure **3028** preferably has a domed shape or a tapered point, but other shapes may be used. In another embodiment, an additional sealing structure (not shown) may be placed on the bottom of float **3022** to seal the entrance to float chamber **3020**, when float **3022** is at the bottom thereof.

When fluid is provided to assembly **3000** the fluid enters float chamber **3020** and raises float **3022** until the float's sealing structure **3028** closes vent **3026** or until the hydrostatic head pressure of the fluid equalizes at some point below the full height of float **3022**. Any air in the system escapes around float **3022** and exits through vent hole **3026**. In this embodiment, it is preferred for the wet extractor's fluid supply tanks, such as supply tank **3004** and detergent tank **3006**, to be positioned above pump **3002** so that fluid flows to and primes pump **3002** by gravity. In this case, priming assembly **3019** serves the useful function of venting any captured air out of the system to allow fluid to flow from tanks **3004** and **3006** to pump **3002**. Also, using this configuration, the vent **3026** need not be connected to a vacuum source as in other systems, which reduces the cost of the device and eliminates the risk of damage that may occur when the vacuum source ingests fluids. Furthermore, if priming assembly **3019** is positioned above the tank attachment points (i.e., above the receptacles with which the tanks' valve assemblies **2810** mate), then one or more check valves (not shown) may be used to prevent fluid in float chamber **3020** from flowing backwards and out of the tank attachment points when the tanks are removed.

Flow valve **3016** is positioned in chamber **3014** to block the fluid communication path between inlet **3012** and outlet **3024** when valve **3016** is in a closed position, and allow fluid communication between inlet **3012** and outlet **3024** when valve **3016** is in an opened position. FIG. **30**A shows valve **3016** in the closed position. When opened, valve **3016** would be moved to the left in FIG. **30**A. A resilient biasing member, such as spring **3030**, is provided to bias flow valve **3016** to the closed position. Spring **3030** may be located outside chamber **3014**, but is preferably inside chamber **3014** to simplify the structural design. When closed, flow valve **3016** blocks the path between inlet **3012** and outlet **3024**, and preferably completely blocks outlet **3024** to prevent any fluid or air passage therethrough. By so covering outlet **3024**, valve **3016** helps prevent fluid either flowing in behind valve **3016** or siphoning out of the system. Although spring **3030** is shown as a coil spring, it, and other resilient biasing members described herein, can be replaced with elastomeric springs, leaf springs and other devices, as will be appreciated by those of ordinary skill in the art.

Pump **3002** and spring **3030** are selected such that pressurized fluid from pump **3002** has sufficient pressure (usually about 7–10 psi) to overcome the spring bias and frictional resistance of the valve seal in the bore. When the bias and friction are overcome, the fluid moves valve **3016**

into the open position, and forces its way into outlet **3024**. When pump **3002** is turned off, spring **3030** forces flow valve **3016** back to prevent fluid communication to outlet **3024**. This feature of the present invention allows the operator to control the flow of fluid to the surface to be cleaned by selectively activating and deactivating pump **3002**, which automatically opens flow valve **3016**. This is advantageous over systems that operate the pump constantly and control flow with a manually-operated mechanical or electric valve. One advantage is that it requires fewer parts because it does not require wiring or mechanical linkages to operate the valve, and instead simply uses the existing power wires to an electric motor driving the pump **3002**. Another advantage of this feature of the invention is that pump **3002** and valve **3016** can be conveniently located virtually anywhere in the wet extractor, whereas systems that have manually operated valves either require the valve to be located in the wet extractor's handle (in the case of mechanically-operated valves) or require the use of expensive solenoid valves and additional wiring (in the case of electrically-operated valves). This configuration also eliminates "dead head" hydrostatic forces that occur when the pump is driven against a closed fluid passage.

In wet extractors having separate supply and detergent tanks, it is often desirable to allow the operator to control the amount of detergent that is mixed with the water from the supply tank. In such cases, it has been found to be desirable to prevent the fluid in the two tanks from intermingling when the wet extractor is not in use. It has been discovered that the flow valve **3016** can also be used to selectively stop the flow of detergent in a wet extractor, thereby isolating the detergent tank from the supply tank when the device is idle.

One embodiment of this feature of the invention is shown in FIG. **30**A, in which valve **2016** is operably connected to a detergent flow valve **3032**. Detergent flow valve **3032** is attached to valve **3016** through a pushrod **3031**, and is fluidly located between a detergent inlet **3034** and a detergent outlet **3036**, so that when it is in the opened position it allows fluid communication between inlet **3034** and outlet **3036**, and when closed it blocks such fluid communication. In the depicted embodiment, the fluid communication path between detergent valve **3032** and detergent outlet **3036** is conveniently made from a portion of valve chamber **3014** that is sealed off from inlet **3012** and outlet **3024** by valve **3016**, but this is not required. In addition, although the embodiment of FIG. **30**A depicts detergent valve **3032** as a poppet or plunger-type valve (i.e., one that operates by plugging and unplugging a hole), detergent valve **3032** could instead comprise any other valve type, such as a piston valve like valve **3016**, a rotary valve, or a slide valve. Plunger valves are preferred for this application due to their typically lower operating friction and inexpensiveness.

Referring now to FIG. **31**, in a preferred embodiment detergent valve **3032**, detergent inlet **3034** and detergent outlet **3036** are constructed as an integral assembly **3100** with valve chamber **3014** and priming assembly **3019**. In this embodiment, valve chamber **3014** is formed in a housing **3102** that includes inlet **3034** and a outlets **3036** and **3024**. The parts are assembled by placing spring **3030** into valve chamber **3014**, inserting valve **3016** and pushrod **3031** (which is attached to valve **3016**) into valve chamber **3014** until the end of pushrod **3031** protrudes through the hole **3032***a* that forms the seat portion of detergent valve **3032**, and placing a rubber plug **3032***b* that forms the valve portion of detergent valve **3032** onto pushrod **3031**. Plug **3032***b* partially encapsulates a knob **3110** on the end of pushrod **3031** and thereby retains the parts together. Valve **3016** comprises a flexible cup-like seal that is overmolded onto the end of pushrod **3031**, one or more o-rings, or any other suitable type of sealing structure. A cap **3104** is glued or screwed to the end of housing **3102** to seal the detergent flow path. Once valve **3016** is in place, a second housing portion **3106** is attached to housing **3102** to close the open end of valve chamber **3014**. Second housing portion **3106** includes inlet **3012** and a float chamber **3020** into which float **3022** is inserted. A cap **3108** having vent **3026** disposed therein is attached to the open end of float chamber **3020** to complete the assembly.

It will be understood that although the configuration described with reference to FIGS. **30** and **31** is preferred and useful to provide a compact assembly, this configuration is not required. In an alternative embodiment, a separate detergent valve assembly, having its own valve and detergent inlet and outlet, may be used instead. In this alternative embodiment, valve **3016** may be attached to detergent valve **3032** by a mechanical linkage, an electrical relay circuit, or by any other connection that causes detergent valve **3032** to open when valve **3016** opens.

Referring back to FIG. **30**A, detergent inlet **3034** is attached (preferably by a flexible hose) to detergent supply tank **3006**. Although the detergent may be pressurized by a pump before it is provided to inlet **3034**, it is preferred to be unpressurized (i.e., not pumped) to reduce cost and the possibility of leakage through valve **3032**, and allow the use of simple low-pressure seals. As used herein, "pressurized" fluid includes any fluid that has its operating pressure increased by a mechanical pump, pneumatic pressurization of the fluid supply tank, and so on, whereas "unpressurized" fluid includes fluid provided by a gravity feed system or any other feed system that does not actively increase the operating pressure of the fluid. Preferably, a detergent valve **3008**, such as those described elsewhere herein (see FIGS. **36**–**37** and accompanying disclosure), is positioned between detergent tank **3006** and inlet **3034**. Detergent outlet **3036** is connected to a mixing manifold **3010** where it mixes with water from supply tank **3004** before going into pump **3002**. One or more check valves (not shown) may be placed along the various fluid circuits to further reduce the incidence of unwanted fluid commingling, backflow and siphoning.

The mixing manifold **3010** is shown in detail in FIG. **30**B. The mixing manifold **3010** comprises a cup-like supply tank receptacle **3060** and a pump receptacle **3072** that are joined by a hollow center passage **3074**. The supply tank receptacle **3060** has a pin **3062** and a fluid inlet **3064**. Pin **3062** engages with a corresponding valve in a supply tank to open a fluid passage from the supply tank to fluid inlet **3064**. Center passage **3074** also includes a detergent inlet **3066** for receiving fluid from detergent outlet **3036** (FIG. **30**A). Pump receptacle **3072** is shaped with an outlet **3070** that receives the inlet of pump **3002**, so that fluid entering fluid inlet **3064** and detergent inlet **3066** is conveyed to pump **3002**. A boot seal **3068** is preferably provided to ensure a water-tight fit between pump **3002** and mixing manifold **3010**.

During operation, when flow valve **3016** moves to place outlet **3024** into fluid communication with inlet **3012**, detergent valve **3032** simultaneously opens and places detergent inlet **3034** in fluid communication with detergent outlet **3036**. Once valve **3032** is opened, detergent can flow into mixing manifold **3010**, become mixed with water from supply tank **3004**, and be pressurized by pump **3002** for deposition onto the surface to be cleaned. When pump **3002** is deactivated, flow valve **3016** closes, simultaneously closing detergent valve **3032**. With detergent valve **3032** closed,

detergent is prevented from flowing from detergent tank **3006** to mixing manifold **3010** and into supply tank **3004**.

Using the present invention, the flow of detergent can be controlled by the pump, rather than requiring separate solenoids or other valves to connect and disconnect the detergent supply. The present invention also reduces or eliminates the problem in some prior art devices in which detergent was free to siphon into the flow path between the supply tank and the pump during idle periods, which resulted in the wet extractor providing an initially high concentration of detergent for a short period after each restart.

Another feature of the invention relates to a system for switching a wet extractor between a floor cleaning mode and an accessory cleaning mode. Many wet extractors are provided with two output modes—one for when the wet extractor is being used on a floor, and one for when an accessory tool is being used with the wet extractor to clean remote surfaces. During accessory tool mode, fluid and vacuum must be diverted away from the floor and to the accessory tool. The unique output valve arrangement of the present invention automatically switches from floor cleaning mode to accessory tool mode when an accessory tool is attached to the wet extractor.

Referring still to FIG. **30**A, liquid management assembly **3000** also includes an output valve assembly **3037** that has an inlet **3038** in fluid communication with valve chamber outlet **3024**. Inlet **3038** opens into chamber **3040** in which a slide valve **3042** is slidably disposed. Slide valve chamber **3040** has a first outlet **3044** and a second outlet **3046**. The first outlet **3044** is adapted to be connected to one or more nozzles **3302** (FIG. **33**B) that are positioned to spray the pressurized fluid directly or indirectly onto a floor. In the embodiment of FIG. **30**A, this connection is provided through an intermediate nozzle outlet **3056**, but such an intermediate attachment point need not be provided (such as shown in FIG. **33**B). Although valve **3042** is shown as a slide valve in the accompanying figures, it will be appreciated by those of ordinary skill in the art that other types of valve (such as a rotating valve) may be used with the present invention.

The second output valve assembly outlet **3046** is adapted to be connected to a detachable accessory tool by way of the tool's attachment plug **3058**. To facilitate this attachment, outlet **3046** preferably leads to a tool hose plug **3048** that attaches to a matching hose plug receptacle **3049** in the tool attachment plug **3058** when it is inserted into the wet extractor. Plug **3048** and receptacle **3049** may comprise any hose attachment system that provides a fluid communication path when connected. In a preferred embodiment, plug **3048** comprises a simple cylindrical plug and receptacle **3049** comprises a slightly larger cylindrical bore. One or both of plug **3048** and receptacle **3049** is preferably provided with a seal, such as an o-ring **3051**, to make the connection fluid-tight.

The position of valve **3042** determines whether the incoming pressurized fluid it transmitted to the first outlet **3044** (and hence to the floor) or the second outlet **3046** (and hence to the accessory tool). Because wet extractors are typically operated primarily in the floor cleaning mode, and it is desirable to cut off fluid flow to the accessory tool when it is not installed, it is desirable to have the default position of valve **3042** be the floor cleaning mode. To this end, output valve assembly **3037** is provided with a resilient biasing member, such as spring **3050**, that urges valve **3042** into a first position (as shown in FIG. **30**A) in which valve **3042** provides a fluid communication path from inlet **3038** to first outlet **3044**, and hence to the floor. When valve **3042** is in the first position (i.e., floor mode), a seal blocks fluid communication to second outlet **3046**. In a preferred embodiment this seal comprises a pair of o-rings **3055** that form an anti-siphon seal that completely blocks fluid and air passage to second outlet **3046**.

When it is desired to attach and operate an accessory tool, slide valve **3042** is moved against the bias of spring **3050**, into its second position (i.e., tool mode) to divert the pressurized fluid to tool outlet **3046**. A second seal blocks fluid communication to the first outlet **3044** in this position. As with the first seal, the second seal preferably comprises a pair of o-rings **3054** that form an anti-siphon seal that completely blocks fluid and air communication to first outlet **3044**. By providing an o-ring **3054** on both sides of outlet **3044**, rather than just placing a single seal between outlet **3044** and inlet **3038**, the seal fully blocks outlet **3044** and prevents any fluid remaining between outlet **3044** and nozzle **3302** from siphoning out of the system and onto the floor. A single large seal or other sealing device that completely covers outlet **3044** could also be used in lieu of the shown double o-ring design.

In a preferred embodiment, valve **2042** is adapted to change from the floor mode to the tool mode simply by the act of installing the accessory tool plug **3058** into the wet extractor. In this embodiment, no additional steps need to be taken to interrupt the fluid communication path to the floor and open the fluid communication path to the tool. In order to provide this automatic switching feature, accessory tool plug **3058** is provided with a structure, such as plunger **3053**, that acts as a valve actuator by pressing on valve **3034** and moving it against the bias of spring **3050** to place it into tool mode. Preferably, plunger **3053** presses against an upper surface **3052** of valve **3042**, but it is also envisioned that plunger **3053** or another structure could press against a trigger protruding from the side of valve **3042**, pull on valve **3042**, or operate valve **3042** through a linkage. Plunger **3053** also may be replaced by a flat surface, in which case top surface **3052** may be shaped to protrude out of output valve assembly **3037** to meet with plug **3058** during engagement with the wet extractor. In an alternative embodiment, in which valve **3042** is actuated by an electrical device such as a solenoid, tool plug **3058** may operate an electrical switch to actuate valve **3042** rather than using a mechanical actuation system as just described.

In the embodiment shown in FIG. **30**A, and the similar embodiment shown in FIGS. **33**A–C, the tool hose attachment structure (e.g., tool hose plug **3048**) is positioned separately from the flow switching structure (e.g., valve upper surface **3052**). This configuration provides several advantages over structures in which the hose attachment structure and output flow switching structure are combined into a single structure, such as in the '098 patent, the '405 patent and the '300 patent described previously herein. One advantage is the reduced cost of the design of the present invention, which requires simpler structures and lower manufacturing tolerances. Another advantage is ease of operation, as the presently disclosed structure does not require any special operation steps to connect the fluid hose. Still another advantage lies in the fact that the hose seal is decoupled from the valve seal, so that a failure of the seal around the fluid connection point (e.g., between plug **4048** and receptacle **3049**) will not cause the output valve assembly **3037** to leak when it is in the floor mode, as may occur in the previously known designs. This final consideration is particularly notable because the fluid connection point on the accessory tool plug **3058** is typically exposed to dust, dirt and other contaminants when it is disconnected from the wet

extractor, and these contaminants can accumulate on and degrade the fluid seal when the accessory tool plug **3058** is inserted into the wet extractor. In contrast, in the embodiments of FIGS. **30** and **33**A–C, if the seal **3051** around the fluid connection point is damaged, it can be easily replaced without having to replace the entire output valve assembly **3037**. Other advantages will be apparent to those of ordinary skill in the art.

Although the separated (i.e., not combined) hose attachment/output valve switching system described thus far is preferred, this does not preclude various embodiments of the present invention from using coaxial, concentric or otherwise combined hose attachment/output valve switching structures, as are known in the art and shown, for example, in the '098, '405 and '300 patents. Such alternative embodiments may include dry-break valves, and systems in which the hose attachment and output valve switching functions are performed either simultaneously or at different times or by different steps. For example, in one alternative embodiment, in which an electric switch is incorporated into the device to automatically operate pump **3002** (as described in more detail below), the device may have an accessory tool plug **3058** having a hose attachment structure that automatically switches the flow output to go to the accessory tool when it is attached. In this embodiment, part of the tool plug, or the fluid valve that is actuated by the tool plug, may be adapted to actuate the electric switch and turn on the pump when the tool plug is inserted into the wet extractor, as described elsewhere herein.

Another feature of the present invention is the inclusion of an electric switch in the liquid management assembly for controlling the operation of pump **3002** during the accessory tool mode. As shown in FIG. **30**A, pump **3002** is operated by a main switch **3003** that selectively activates pump **3002**. During operation on a floor, the wet extractor operator selectively closes switch **3003** whenever the operator desires deposit cleaning fluid. In order to make operation convenient to the operator, switch **3003** is preferably located in the wet extractor handle. In order to prevent inadvertent activation of switch **3003**, a cutoff switch **3005** may be placed in the wet extractor to deactivate switch **3003** whenever the handle is folded, as described elsewhere herein. As noted before, this system reduces the complexity of the device by eliminating the requirement for a manually operated valve (either mechanical or electric), and increases pump life by only activating pump **3002** during actual fluid deposition in the floor cleaning mode. This system also eliminates high "dead head" pressures, and the accompanying strain on the fluid system components and connections, that occur when the pump operates against a closed passage without being able to move fluid.

Although this embodiment of the invention has numerous advantages with regard to operation in floor cleaning mode, in some embodiments switch **3003** may not be easily operated when the operator is using an accessory tool. Although this inconvenience may be overcome by incorporating an electric switch in the accessory tool, similar to the manner shown in U.S. Pat. No. 5,400,462, such a solution is undesirable because it increases the cost of the device and, more importantly, introduces an electrocution hazard. It has been discovered, however, that this inconvenience can be overcome by incorporating a separate automatic pump activating switch directly into the liquid management assembly **3000**. In this embodiment of the invention, whenever the tool accessory plug **3058** is installed in the wet extractor and engaged with the liquid management assembly **3000**, pump **3002** is automatically activated. Fluid flow is then controlled locally at the accessory tool by a trigger valve, such as a pinch valve, slide valve, or the like located in the accessory tool or tool handle. Referring now to FIGS. **32** and **33**A–C, various additional embodiments of the invention having automatic pump switches will now be described.

Referring now to FIG. **32**, there is shown a side view of an automatic pump switch assembly **3200** that may be integrated into the liquid management assembly **3000** of FIG. **30**A. The pump switch assembly **3200** comprises an electrical switch **3212** that is positioned to be activated by a switch plunger **3216** attached to valve **3042**. Switch **3212**, which may be a relay, a microswitch or any other conventional electric switch, is wired to operate pump **3002** regardless of the position of the device's handle switch **3005** or main pump switch **3003** (see FIG. **30**A). Switch **3212** may also be wired to simultaneously activate a vacuum source as well. In this embodiment, switch plunger **3216** comprises or is positioned on an end of valve **3042** opposite the surface **3052** that is pressed by plunger **3052**. In alternative embodiments, plunger **3216** may be located elsewhere, such as on a trigger extending from the side of valve **3042**, or plunger may be replaced by (or work in conjunction with) a mechanical linkage or other device. Although switch **3212** preferably is operated indirectly by the accessory tool plug **3058** by way of valve **3042**, in other embodiments, it may be directly operated by accessory tool plug **3058** itself. For example, switch plunger **3216** may be located on tool plug **3058** itself. Such alternative configurations are acceptable, provided they do not pose an electrical shock hazard.

Various steps can be taken to prevent switch **3212** from being contaminated with fluids or dirt. For example, switch **3212** is preferably encased in a housing **3214** that protects the switch from contact with fluids. While housing **3214** is designed to prevent most fluid from dripping or splashing onto switch **3212**, housing **3214** need not be fluid-tight, and it may be sufficient to simply orient the openings in the housing downward to prevent contact with fluids. In addition, the switch wires **3220**, which provide an electrical connection to pump **3002**, may be looped as shown, to form a drip-stop that prevents fluid from flowing along wires **3220** to switch **3212**. In order to further isolate switch **3214** from potential contact with fluids, switch **3212** may be operated by way of a switch lever **3218** that projects out of housing **3214** with its end positioned in the path of slide valve **3042**.

When valve **3042** is actuated to divert pressurized water to the outlet **3046**, as described above, the switch plunger **3216** engages with switch lever **3218** to activate switch **3212** and turn on pump **3002**. In this embodiment of the invention, all of the necessary functions to activate a detachable accessory tool—such as attaching the fluid hose, switching the fluid valve to operate in tool mode, and activating the pump—can be integrated into a single step of inserting the accessory tool plug into the wet extractor. Furthermore, this embodiment provides a highly centralized liquid management assembly **3000** that can be formed as a unit and easily placed into the wet extractor during assembly.

FIGS. **33**A–C depict another embodiment of a liquid management assembly **3300** having an integrated automatic pump switch. Assembly **3300** operates in substantially the same manner as assembly **3000** described with reference to FIG. **30**A, and therefore the same reference numerals are used where appropriate. The integrated electric switch **3212** of assembly **3300** is operated by a J-hook **3314** that extends from the bottom of valve **3042**. In this embodiment, J-hook **3314** helps prevent any fluids that might escape downward from valve chamber **3040** past valve seals **3055** from shorting out or contaminating integrated switch **3212**.

Instead, any such leaking fluids descend to the bottom of J-hook **3314** and harmlessly drip away. In other respects, the embodiment of FIGS. **33**A–C is essentially the same, at least in operation, as the embodiment of FIG. **30**A.

As previously shown with reference to FIG. **31**, various parts of the liquid management assembly of the present invention can be constructed as joined units. In the case of the embodiment of FIG. **31**, the main flow valve **3016** and its associated parts are joined with the priming assembly **3019**. In other embodiments, various other parts of the liquid management assembly can be joined together, and in a most preferred embodiment, essentially all of the liquid managing parts of the wet extractor are assembled as a conjoined unitary structure. Such an embodiment will now be described with reference primarily to FIGS. **33**B and **33**C, which show exploded and assembled views, respectively, of an embodiment of assembly **3300** of FIG. **33**A. When constructed in this manner, assembly **3300** can be easily incorporated into a wet extractor during assembly and replaced as a compact modular unit.

As shown in FIG. **33**B, assembly **3300** comprises various operating parts, including an integral flow valve/priming assembly **3100**, an output valve assembly **3037**, a switch **3212** and a hose plug **3048**. These parts are fluidly joined to one another by numerous hoses **3304** and hose clamps **3306**, and the parts and hoses are sandwiched between first and second shell halves **3308** and **3310**. Shell halves **3308** and **3310** may be glued or otherwise bonded together, but are preferably held together by one or more screws **3320**. Shell halves **3308** and **3310** may also be formed or provided with locating ribs **3322** or other mounting points that are used to hold assembly **3300** in the proper location in the wet extractor.

In order to hold the parts and hoses in their desired positions, one or both of shell halves **3308** and **3310** are formed with various pockets **3312** and **3316** that contain the parts. One or both of shell halves **3308** and **3310** also may be provided with locating pins **3324** to help hold the parts in their proper locations. In the embodiment of FIG. **33**B, insulation or padding **3318** is also provided to reduce shock on switch **3212** and hold it more firmly in place to ensure consistent operation. Also in the embodiment of FIG. **33**B, pocket **3312** is shaped to hold spring **3050** and retaining washer **3315** in place in valve assembly **3037**, which eliminates the need to provide valve assembly **3037** as a sealed unit. During installation, valve **3042** is inserted into valve housing **3326** until shelf **3327** abuts internal shelf **3328** in chamber **3040**. Spring **3050** is then installed over J-hook **3314**, followed by washer **3315**. When inserted into pocket **3312**, spring **3050** and washer **3315** are retained by a shelf **3330**.

Although the embodiment of FIGS. **33**B and **33**C is shown having various parts captured between shell halves **3308** and **3310**, in alternative embodiments, a unitary assembly of the present invention may be formed from various interlocking parts, parts that are bonded or fastened to one another, combinations of bonded, fastened or captured parts, and so on. Preferably, the present invention uses an inexpensive and compact series of valves, springs, floats and seals to control the fluid flow, prime the pump and prevent unwanted siphoning and provides an improved liquid management assembly that eliminates the expense and bulk of conventional devices. In one embodiment, the liquid management assembly **2610** of FIG. **26** can easily fit into a space less than about 6"×4.75"×1.5", and even more compact designs are possible.

Referring now to FIG. **33**D, an alternative flow valve assembly **3332** for the embodiment of FIG. **33**A is shown. Of course, assembly **3332** may also be used with any of the other liquid management assemblies described herein, and may be integrally formed with other parts, such as priming assembly **3019**, as shown in the embodiment of FIG. **31**. Assembly **3332** comprises a flow valve **3016** slidably disposed in a flow valve chamber **3014**, and a detergent valve **3032** that is attached to flow valve **3016** by a pushrod **3031**. Assembly **3332** is installed in the fluid circuit as described herein, and the parts are essentially identical to those described previously herein, but with two additional features. The first additional feature is that flow valve **3016** comprises a rigid piston body **3334** that is provided with a pair of o-rings **3336** to seal flow valve chamber **3014**, rather than a flexible cup-like structure as shown in FIG. **31**. This construction has been found to provide improved sealing to prevent air or fluid from escaping out of first outlet **3024** when the valve is off.

Another additional feature of the embodiment of FIG. **33**D is a check valve **3338** located in the face of flow valve **3016**. Check valve **3338** comprises a sliding ball **3340** or piston that can be moved to abut and seal a corresponding hole **3342**, and is held in the closed position by a light spring **3344**. Check valve **3338** prevents fluid from passing from flow valve chamber **3014** into the space behind flow valve **3016** (i.e., into the space between flow valve **3016** and detergent valve **3032**), but spring **3344** is light enough to allow air to evacuate from behind flow valve **3016** into flow valve chamber **3014** when the device is priming. Air that passes through check valve **3338** escapes through flow valve chamber **3014** and priming assembly **3019**. Of course, other check valve configurations, such as a rubber flapper door, also may be used. The inclusion of check valve **3338** and o-rings **3336** has been found to improve priming of the system, especially during startup, however these features are not required with the present invention.

The present invention also overcomes the inconvenience of having to perform multiple operations on a device to attach and activate an accessory or spot cleaning tool. In a most preferred embodiment, the operator can attach the accessory tool fluid and vacuum hoses, shut off fluid and vacuum flow to the floor, divert these flows to the accessory tool, and activate the fluid pump to provide pressurized fluid to the accessory tool in a single action. A preferred embodiment of an accessory tool plug and tool plug outlet system that can be used to simultaneously provide these functions will now be described with reference to FIGS. **34**A through **35**C.

A preferred embodiment of an accessory tool plug **3400** is depicted in FIGS. **34**A and **34**B. Plug **3400** comprises a rigid body **3402** attached to one end of a flexible vacuum hose **3404**. The other end of vacuum hose **3404** is attached to an accessory tool, which may be a conventional accessory tool or an accessory tool as described elsewhere herein (see, e.g., FIGS. **45**A–**50**D). A flexible cleaning solution hose **3405** is disposed within (or, alternatively, outside) vacuum hose **3404** and extends between rigid body **3402** and the accessory tool. Rigid body **3402** has three main functional components: a vacuum diverter **3406**, a valve actuator **3408**, and a fluid receptacle **3410** (which is shown partially cut away in FIG. **34**B). Vacuum diverter **3406** comprises one or more blocking surfaces **3412** that block the vacuum path between the wet extractor's floor vacuum nozzle and the recovery tank, and one or more bypass inlets **3414** that provide a vacuum path between the recovery tank and vacuum hose **3404**, as will be described in more detail with reference to

FIG. **35**C. Valve actuator **3408** is shaped to actuate a fluid output valve assembly (**3510** in FIG. **35**A), and fluid receptacle **3410** is adapted to fluidly connect to a tool hose plug (**3508** in FIG. **35**A), as previously described with reference to FIG. **30**A. Preferably, the fluid output valve assembly and tool hose plug are part of a unitary liquid management assembly, as shown in FIGS. **33**A–C.

Plug **3400** may be manufactured or assembled in any way or by any method, but is preferably formed from two housing halves **3420** and **3422**. Housing half **3420** forms vacuum diverter **3406** and has hollow vacuum passage therethrough, as shown by broken lines in FIG. **34**B, extending from bypass inlet **3414** to an outlet opening **3424**. The other housing half **3422** is molded to form valve actuator **3408**, and has a recessed cavity **3426** that is shaped to hold a separately molded fluid receptacle **3410**. Fluid receptacle **3410** is attached to fluid hose **3405**, which extends out through opening **3424** and is contained within vacuum hose **3404** when assembled. An upper portion of housing half **3422** may also form part of the vacuum passage between bypass inlet **3414** and opening **3424**. A plate **3428** holds fluid receptacle **3410** in place. A number of screws **3430** may be used to hold the parts together, or the parts may be bonded or shaped to snap-engage with one another without separate fasteners. A release latch **3432** is preferably attached to the rigid body **3402**, preferably on the second housing half **3422** so that it does not obstruct bypass inlet **3414**.

Although the embodiment of FIG. **34**A shows valve actuator **3408** and fluid receptacle **3410** being positioned outside vacuum diverter **3406**, one or both of these components may be located partially or entirely within vacuum diverter **3406**. Also, valve actuator **3408** can be formed at virtually any location on rigid body **3402**.

Referring now to FIG. **35**A, the wet extractor housing **3500** is provided with a plug outlet **3502** having a first opening **3504** and a second opening **3506**. First opening **3504** contains tool hose plug **3508** (such as plug **3048** in FIG. **30**A) and an operable portion of fluid output valve assembly **3510** (such as the upper surface **3052** of assembly **3037** in FIG. **30**A). These parts are recessed in opening **3504** and are shown in broken lines. Second opening **3506** opens to a vacuum path between the floor vacuum inlet nozzle **3512** (which has an inlet slit proximal to the floor), and recovery tank **3514**. Floor vacuum inlet nozzle **3512** and recovery tank **3514** may be constructed according to various embodiments of the invention described elsewhere herein, or may have a conventional construction. A vacuum source (not shown) applies a vacuum to recovery tank **3514** to draw air therethrough.

Plug outlet **3502** is also provided with a cover **3516** having a sealing surface **3518** (preferably a foam or rubber pad or gasket) on the bottom side thereof. Cover **3516** may be hinged, slidably engaged, or otherwise attached to housing **3500**. When cover **3516** is closed, sealing surface **3518** covers plug outlet **3502** and contains the vacuum within housing **3500**. In one embodiment, cover **3516** (and sealing surface **3518**) also seals first opening **3504** from second opening **3506** by abutting a dividing wall **3524** between the two, which eliminates the need to make first opening **3504** vacuum-tight to prevent unwanted vacuum leaks. Cover **3516** also may be equipped with tabs, hooks or fasteners (not shown) that engage with housing **3500** to hold it in engagement therewith (preferably snap engagement) when closed. Cover **3516** also may be provided with similar devices to engage with accessory plug **3400** to help retain plug **3400** when it is installed in housing **3500**.

FIG. **35**B shows the wet extractor when cover **3516** is closed and the device is in floor cleaning mode. In this configuration, the vacuum path **3520** travels from floor vacuum inlet nozzle **3512** and into recovery tank **3514** by way of opening **3522**. Opening **3522** comprises an open passage through a vacuum path outlet (**2442** in FIG. **24**) in the housing **3500** and an adjoining opening (**2712** in FIG. **27**A) into recovery tank **3514**. When it is desired to change from floor cleaning mode to accessory tool mode, accessory plug **3400** is inserted into plug outlet **3402**, as shown in FIG. **35**C. When tool plug **3400** is installed, surface **3412** blocks the vacuum path between floor vacuum inlet nozzle **3512** and opening **3522** into recovery tank **3514** and diverts the vacuum path **3520** to travel from the accessory tool to recovery tank **3514**. This novel plug/outlet configuration provides a simple one-step connection between the accessory tool and the wet extractor.

Another aspect of the present invention is directed towards an infinitely adjustable detergent concentration valve that may be used to control the amount of detergent that is mixed with the fresh water of a wet extractor. Various preferred embodiments of a detergent valve of the present invention will now be described with reference to FIGS. **36**–**38**. Except as otherwise noted, the detergent valves depicted in FIGS. **36** and **37** are substantially identical, and the same reference numerals are used where appropriate. These detergent valves may be used with the liquid management assembly shown elsewhere herein, or with conventional fluid systems.

Referring specifically to FIG. **36**, a preferred embodiment of a detergent valve assembly **3600** is shown. Detergent valve assembly **3600** comprises a housing **3602** having a detergent inlet **3604** and a detergent outlet **3606**. Detergent valve housing **3602** may have one or more flanges **3601** or other surfaces to facilitate its attachment in a wet extractor.

Detergent valve **3600** can be located, in a fluid flow sense, anywhere between the detergent tank and the mixing manifold **3010** where it mixes with water from the supply tank **2414**. As noted before with reference to FIG. **30**A, the detergent valve is preferably positioned in the fluid path between the detergent tank (**3006** in FIG. **30**A) and the liquid management assembly (**3000** in FIG. **30**A). In this embodiment, detergent inlet **3604** is fluidly attached to a detergent supply tank **3006** (FIG. **30**A) and detergent outlet **3606** is attached to a detergent inlet **3034** (FIG. **30**A) of a liquid management assembly **3000**, where the flow of detergent can be selectively stopped and started by valve **3032** (FIG. **30**A). After passing through valve **3032**, the detergent flow path continues to a mixing manifold **3010** (FIG. **30**A), where it mixes with fresh water from a supply tank **3004** (FIG. **30**A). One notable advantage to locating the detergent valve in the gravity-fed portion of the fluid path as shown in FIG. **30**A, rather than in the portion of the fluid path that is pressurized by the pump, is that it is unnecessary to provide pressure-proof seals in the detergent valve. This system also uses the negative pressure side of the pump to help pull detergent through the system to assist with the detergent's gravity feed.

Various alternative embodiments of this configuration are possible with the present invention. For example, a device other than valve **3032** may be used to control the flow of detergent, or valve **3032** can be omitted or placed between the detergent tank **3006** and the detergent valve assembly **3600**. In another alternative embodiment, detergent outlet **3606** can lead directly to a mixing manifold to mix with water from a supply tank. In still another embodiment, one

or more check valves (not shown) can be positioned in the detergent flow path to prevent backflow.

Detergent valve assembly **3600** has first and second bores **3608** and **3610** that are arranged in a substantially co-linear fashion. Bores **3608** and **3610** are also preferably generally concentric (i.e., sharing a common centerline), but this is not required. A plunger **3612** is inserted into detergent valve assembly **3600** through a plunger opening **3614** located at the end of first bore **3608** that is opposite second bore **3610**. Plunger **3612** is slidably movable within detergent valve assembly **3600** in the direction shown by the double-headed reference arrow G. Plunger **3612** may also be shaped with a tang **3616** that engages with a slot **3618** in housing **3602**, which prevents rotation of plunger **3612** relative to housing **3602**, which may be particularly useful when bores **3608** and **3610** are made with a generally cylindrical shape. Rotation of plunger **3612** may also be prevented by making one or both of bores **3608** and **3610** generally non-circular in cross section, or by offsetting the centerline of the second bore **3610** relative to the centerline of the first bore **3608**.

As shown in FIG. **36**, detergent inlet **3604** is located between plunger opening **3614** and bore **3610**. Plunger **3612** has a first fluid seal **3620**, which is preferably an o-ring, that prevents fluid passage from inlet **3604** to plunger opening **3614**. As such, detergent entering first bore **3608** through inlet **3604** is directed into second bore **3610** and towards outlet **3606**. Although it is preferred for first fluid seal **3620** to be attached to plunger **3612** to move therewith, it may alternatively be fixedly positioned in bore **3608**.

Plunger **3612** is adapted to control the amount of detergent that passes from detergent inlet **3604** to detergent outlet **3606**. To do so, plunger **3612** is equipped with a second fluid seal **3622**, which is preferably an o-ring, that is positioned on a portion of plunger **3612** that extends into second bore **3610**. Second bore **3610** has a tapered slot **3624** that is deepest proximal to the end of bore **3610** closest to first bore **3608**, and eventually tapers to nonexistence as it extends along the length of second bore **3610** towards detergent outlet **3606**. Tapered slot **3624** may have a true taper (i.e., a continuous gradual slope), which is preferred, or a stepped profile in which its depth decreases by discrete incremental amounts. The remaining walls of second bore **3610** (i.e., those that do not form tapered slot **3624**) form a cross-sectional shape that is continuous along the length of second bore **3610**, and generally coincides with the shape of second fluid seal **3622**. In this manner, second bore **3610** is provided with a variable cross-sectional shape that increases in area as a function of distance from outlet **3606** along the second bore **3610**, as the taper deepens.

The length of tapered slot **3624** is selected so that, when plunger **3612** is in a fully inserted position (all the way to the right, as seen in FIG. **36**), second fluid seal **3622** is positioned past the end of tapered slot **3624**, and therefore fully seals the passage between detergent inlet **3604** and detergent outlet **3606** to prevent the passage of detergent therethrough. This is the detergent "off" position. As plunger **3612** and the attached second fluid seal **3622** are retracted from the fully inserted position (i.e., moved leftward in FIG. **36**), second fluid seal **3622** slides along tapered slot **3624**, and thereby allows an increasing amount of detergent to pass through tapered slot **3624** to detergent outlet **3606**. This occurs because second fluid seal **3622** generally retains its cross-sectional shape, regardless of where it is located relative to tapered slot **3624**, and thereby blocks less and less of the total cross section of second bore **3610** at it travels across deeper and deeper portions of tapered slot **3624**. The movement of plunger **3612** is blocked at the fully opened position by a stop (not shown), such as a protrusion on the wet extractor housing, to prevent second fluid seal **3622** from passing into first bore **3608**.

It will be seen from this discussion that when tapered slot **3624** has a true taper, the amount of detergent allowed past second fluid seal **2622** is essentially infinitely variable between the fully-opened and off positions. When tapered slot **3624** has a stepped profile, discrete detergent passage amounts are provided. Either of these embodiments may be used with the present invention. In another embodiment, shown in FIG. **37**, a rib **3702** may be added to the body of plunger **3612** to slide into tapered slot **3624**. This rib **3702** may provide added control over the amount of detergent added to the water, help seal the passage between detergent inlet **3604** and detergent outlet **3606**, and provide additional resistance to rotation of plunger **3612**. The rib **3702** also acts as a broach to physically remove any solidified detergent that may accumulate in the tapered slot **3624** after long periods of inactivity.

Although virtually any sealing device can be used as first and second seals **3620** and **3622**, o-rings are inexpensive and perform adequately to prevent unwanted leaking. Furthermore, while the primary function of seals **3620** and **3622** is to control the flow of detergent, it should also be appreciated that seals **3620** and **3622** also provide a friction fit between plunger **3612** and bores **3608** and **3610** that prevents the gravity-induced head pressure of the detergent in the detergent tank from forcing the detergent valve assembly **3600** open. Again, it has been found that simple o-rings can provide a friction fit that prevents unwanted plunger movement, even when the detergent tank is raised substantially above the level of detergent valve assembly **3600**.

Although the discussion herein identifies passage **3604** as a detergent inlet and passage **3606** as a detergent outlet, it will be readily appreciated that these may be reversed with respect to the direction of detergent flow. It will also be appreciated that detergent valve assembly **3600** can be oriented in any direction, although it is preferred that assembly **3600** be oriented vertically with plunger opening **3614** at the top. Furthermore, inlet **3604** and outlet **3606** may be positioned on different sides of housing **3602**, rather than being on the same side as shown in the figures. Such variations are all within the realm of regular engineering design choice.

Referring now to FIG. **38**, the detergent valve assembly **3600** is preferably operated by a slider **3802** located on the outside of a wet extractor housing **3800**. Slider **3802** is either mechanically linked to plunger **3612**, or, more preferably, slider **3802** and plunger **3612** are monolithically formed as a single unit. Housing **3800** holds slider **3802** in place on tracks, or, if a monolithic plunger/slider unit is used, slider **3802** may be held in place by the plunger's sliding interface within the bores of the detergent valve assembly. In the latter case, housing **3800** may still have a guide to help control the movement of the slider **3802** portion of the unit, and also preferably acts as a bump stop to stop the slider/plunger unit at the fully opened position and prevent the plunger **3612** from traveling too far out of the bores.

In a preferred embodiment, slider **3802** is located on a back face **3804** of wet extractor housing **3800**, as shown in FIG. **38**. The portion of wet extractor housing **3800** shown in FIG. **38** shows a detergent supply bottle **3806** and a fresh water supply tank **3810** that are inserted into a base assembly **3812** having a lifting handle **3814**. An operating handle, like those described elsewhere herein, may also be attached to housing **3800**, but is not shown in FIG. **38** for clarity. The

wet extractor preferably has the features and construction of the embodiments described throughout the present disclosure, but this is not required.

Slider **3802** preferably is shaped to be easily operated by hand or by foot. Slider **3802** also may be marked with graphics **3816** to indicate the detergent-to-water mixture level, and it is preferred that graphics **2824** be clearly visible when the operator is standing upright. Using this configuration, a user can operate a simple sliding device to control the amount of detergent that is mixed with the fresh water of the extractor, rather than having to operate a rotating device. The user may even control the mixture without bending over by operating slide **3802** with his or her foot. Furthermore, the infinitely variable tapered slot-type device provided by the present invention allows the user to precisely tailor the amount of detergent used, without having to select from discrete concentration levels as required in conventional wet extractors. This provides the user with virtually unregulated control over the amount of detergent that can be mixed with the fresh water.

Still another aspect of the present invention relates to a unique agitation system that may be used in the main housing of a floor cleaning device or an accessory cleaning tool. Although the agitation system described herein is described in the context of a wet extractor, it will be apparent to those of ordinary skill in the art that it may also be used in other devices. In one embodiment, the cleaning device agitator has a mount, an agitator comb that is operatively attached to the mount and adapted to be vertically displaceable relative to the mount in a first linear direction perpendicular (or at least partly perpendicular) to a surface to be cleaned, and a drive assembly adapted to cyclically drive the agitator comb in a second linear direction substantially parallel to the surface to be cleaned without vertically driving the agitator comb. Preferably, the agitator comb is free to float on the surface being cleaned even when it is being driven.

FIGS. **39**A through **44**D depict various embodiments of linear agitators of the present invention that are usable in the main body of a cleaning device or in a powered accessory tool. Generally speaking, the linear agitator comprises an agitator comb that is operatively attached to a mount in the cleaning device. The agitator comb is adapted to be driven back and forth, relative to the mount, along a first linear direction that is parallel to the surface being cleaned. The agitator comb is also operatively attached to the mount in such a way that it is vertically displaceable relative to the mount (i.e. perpendicular to the surface being cleaned), which allows the agitator comb to "float" on the surface without applying a substantial vertical force to the surface beyond the weight of the agitator comb itself. Preferably, this operative attachment is through a drive assembly located between the agitator comb and the mount, and to which both the agitator comb and the mount are separately attached. As used herein, the term "operatively attached" and variations thereof refer to direct physical attachment (such as by directly fastening of one part to another), indirect physical attachment (such as by attaching two parts together through an intermediate part), physical capture (holding parts together by limiting their relative movement in one or more directions), or any other attachment (e.g., magnetic) that holds the parts in the desired physical relationship with one another.

Referring specifically to FIGS. **39**A–D, in a first preferred embodiment, the agitator comb **3904** is attached to the housing **3901** (FIGS. **39**C–D) of a cleaning device by way of a drive assembly **3902**. Generally speaking, agitator comb **3904** comprises a rigid base portion **3904***a* (comprising, for example, polypropylene or ABS plastic) to which flexible cleaning bristles **3938** or other agitating devices are attached to extend towards the surface to be cleaned. Although agitator comb **3904** is shown herein as a single piece that extends across substantially the entire width of the cleaning device, it will be appreciated that multiple shorter agitator combs, or multiple full-width agitator combs may be used with the present invention. Drive assembly **3902** is driven, as described in more detail below, in a cyclical side-to-side motion by a drive motor **3906**, which may be an electric motor, a turbine drive, or any other type of motor, as are known in the art. In the embodiment of FIG. **39**A, drive assembly **3902** comprises three parts: a mounting rail **3908**, a flexible connector **3910**, and an agitator drive bar **3912** (or drive plate). Mounting rail **3908**, flexible connector **3910** and drive bar **3912** are preferably permanently united by mechanical, adhesive or molded-in-place/overmolding attachment. In other embodiments, mounting rail **3908**, flexible connector **3910** and drive bar **3912** may be formed integrally, and the mounting rail and/or the drive bar may be omitted.

It has been found that it is particularly desirable for the agitator comb **3904** to be mounted to the device such that is can "float" on the surface being cleaned without applying a significant vertical force thereto. Alternatively, it can be spring biased to provide a downward force when the housing is located at the desired distance for cleaning. In the present invention, one way of providing this desired "float" is to mount the agitator comb **3904** so that it is vertically displaceable relative to its mounting point on the device to which it is attached (the direction "vertical" being generally perpendicular to the surface being cleaned and shown by arrow B in FIG. **39**A). In the embodiment of FIGS. **39**A–D, agitator comb **3904** can be isolation mounted such that it is vertically displaceable relative to the mount in at least three ways. One way of displaceably mounting agitator comb **3904** is to rigidly attach mounting rail **3908** to housing **3901**, as shown in FIGS. **39**C–D and displaceably mount agitator comb **3904** to drive assembly **3902**. In the embodiment of FIGS. **39**A–D, mounting rail **3908** has mounting posts **3914** that fit into corresponding sockets in housing **3901**, and is rigidly (i.e., not displaceably) attached to housing **3901** by threaded fasteners **3924** or the like. Vertical displacement between agitator comb **3904** and drive assembly **3902** is accomplished by equipping agitator comb **3904** with a pair of vertically-extending clips **3916** that fit into corresponding holes **3918** through agitator drive bar **3912**. As shown in FIGS. **39**C and **39**D, clips **3916** are elongated so that agitator comb **3904** can slide vertically relative to agitator drive bar **3912** (and housing **3901**) by a float distance Y. While float distance Y may be virtually any distance, float distance Y is preferably at least about 0.125 inches, and more preferably at least 0.250 inches to provide sufficient float on various different surfaces.

The agitator comb **3904** of FIGS. **39**A–D may also be provided with certain additional features. For example, agitator comb **3904** is equipped with guide pins **3920** that fit into corresponding holes **3922** in drive assembly **3902** to help guide the movement of agitator comb **3904** as it displaces relative to housing **3901**. Mounting posts **3914** are conveniently located directly above holes **3922** to facilitate the insertion of fasteners **3924** to attach mounting rail **3908** to housing **3901**. In addition, while clips **3916** are engaged in holes **3918** such that they will not come out under normal use, they are preferably selected to be easily removed from holes **3918** by a user to selectively remove agitator comb

3904 for cleaning, operation without the agitator comb 3904, or replacement with alternative agitator combs that better suit the requirements of the particular surface being cleaned.

In the embodiment shown in herein, clips 3916 are made removable by shaping each clip 3916 as a pair of flexible posts 3916*a* having ramped protrusions 3916*b* at the end thereof. When agitator comb 3904 is pulled away from agitator drive bar 3912, ramped protrusions 3916*b* are pressed towards one another by contact with the inner edges of hole 3918, thereby flexing posts 3916*a* until protrusions 3916*b* move toward one another far enough to allow the clip's removal. The design of such releasable clips 3916 is within the ordinary skill of the art. It should also be understood that, while clips 3916 are shown as internal clips (i.e., clips that are inserted into a hole or opening in the part that they grip), clips 3916 may also be replaced by external clips that wrap around the part that they grip, or any other suitable type of sliding fastener. Any such variations are within the scope of the invention.

Two alternative embodiments for operatively attaching agitator comb 3904 so that it is displaceable relative to housing 3901 are shown in FIGS. 40A and B. In FIG. 40A, agitator comb 3904 is slidably mounted to drive assembly 3902 using clips 3916, as in FIGS. 39A–D, and mounting rail 3908 is also mounted to housing 3901 by a similar set of clips 4002. Like the agitator clips 3916, the drive assembly clips 4002 are elongated to allow vertical displacement between drive assembly 3902 and housing 3901. In this embodiment, the amount of vertical travel is the cumulative amount of travel provided by each set of slideable clip fasteners. In a third embodiment shown in FIG. 40B, mounting rail 3908 is attached to housing 3901 by vertically displaceable clips 4002, as in FIG. 40A, but agitator comb 3904 is rigidly affixed to the lower part of drive assembly 3902 by fasteners 4004. In this embodiment, the amount of displacement is equal to the slideable engagement distance between drive assembly 3902 and housing 3901. In either of these embodiments, the entire drive assembly 3902 may be removed for cleaning by disengaging clips 4002.

Although the embodiments described herein use slideable engagement systems to provide displaceability between agitator comb 3904 and housing 3901, other systems and embodiments if isolation mounts also may be used to provide the desired relative movement between agitator comb 3904 and housing 3901. For example, one or both of drive assembly 3902 and the agitator comb 3904 may be mounted on a displaceable linkage or a pivoting swing arm (such as shown in U.S. Pat. No. 5,937,475) that allows agitator comb 3904 to freely move towards and away from housing 3901. These and other embodiments will be apparent to those of ordinary skill in the art in light of the present disclosure.

In still another embodiment, shown in FIG. 40C, the agitator comb 3904 and/or drive assembly 3902 may also be mounted to pivot through an arc relative to housing 3901. In this embodiment, agitator comb 3904 is mounted such that it rocks back and forth about an axis parallel with the long axis of the agitator comb 3904 as the device is moved back and forth over the surface being cleaned. This may be accomplished by replacing mounting posts 3914 and fasteners 3924 with hinged mounts 4006.

In a preferred embodiment, both mounting rail 3908 and agitator drive bar 3912 comprise a relatively rigid structure. Molded plastic, such as ABS plastic, or other lightweight rigid materials are most preferred. Agitator drive bar 3912 also includes one or more drive points 3926 that are adapted to be driven in a generally side-to-side motion by drive motor 3906 (the drive point or points may alternatively be located on flexible connector 3910 or agitator comb 3904). Motor 3906 is preferably attached to a switch to allow the user to selectively operate the agitator 3900 when desired. In embodiments using an electric motor, motor 3906 is preferably wired independently of the vacuum source, so that motor 3906 can operate either when the vacuum is operating or when it is not operating.

In the preferred embodiment of FIGS. 39A–D, drive point 3926 comprises a vertically-oriented slot 3928 (i.e., a slot that extends generally in the vertical direction as shown by arrow B) into which a rotatable eccentric drive pin 3930 slidably fits. Slot 3928 may be formed integrally with agitator drive bar 3912, but is more preferably formed as a replaceable insert 3934, as shown in FIGS. 39B and 43A–C. In this embodiment, insert 3934 may be easily replaced if slot 3928 becomes worn, and the entire agitator drive bar 3912 need not be made of the hard, wear-resistant, low-friction or self-lubricating material that is preferred to make slot 3928. A bearing (not shown) or lubricating grease also may be provided between eccentric pin 3930 and slot 3928 to help reduce friction and wear.

Eccentric pin 3930 rotates about a drive axis 3932 that is offset from the centerline of eccentric pin 3930. As such, eccentric pin 3930 translates both laterally and vertically, in the directions of arrows A and B, respectively, as it rotates. The lateral movement of eccentric pin 3930 (in the direction of arrow A) is imparted to the vertical walls of slot 3928 to thereby drive agitator drive bar 3912, and the attached agitator comb 3904, in a cyclical lateral motion in direction A. The vertical length of slot 3928 is selected to be greater than the total vertical movement of eccentric pin 3930, and eccentric pin 3930 therefore slides up and down relative to agitator drive bar 3912 or agitator comb 3904 without imparting any substantial vertical force thereto. In this manner, motor 3906 imparts lateral driving forces to agitator comb 3904, while isolating agitator comb 3904 from vertical forces that could wear the surface being cleaned, or drive dirt deeper into the surface.

The eccentric pin/slot configuration of the embodiment of FIGS. 39A–D is shown in a more detailed cross-section in FIG. 43A. Replaceable insert 3934 is also shown in FIG. 43A. Although it is preferred for slot 3928 to be oriented vertically (i.e., at about 90 degrees) relative to the surface to be cleaned 4302, is it also envisioned that slot 3928 may also be oriented at other angles relative to surface 4302. For example, in FIG. 43B, eccentric pin 3930 is positioned above agitator comb 3904, and its rotation axis 3932 is perpendicular to surface 4302, rather than being parallel to it. In this embodiment, slot 3928 is oriented generally parallel to surface 4302. Similarly, in FIG. 43C eccentric pin 3930 and slot 3928 are angled (i.e., between parallel and perpendicular) relative to surface 4302. In any of these embodiments, eccentric pin 3930 drives agitator comb 3904 by way of slot 3928 without imparting a substantial vertical force on surface 4302. Furthermore, to the extent any vertical force is imparted by the movement of eccentric pin 3930 in slot 3928, the use of isolation mount clips 3916 prevents any significant amount of this vertical force from being imparted to surface 4302.

Referring back to FIG. 39A, motor 3906 preferably drives eccentric pin 3930 by way of a gearbox 3907. Gearbox 3907 is selected to rotate eccentric pin 3930 at the desired cyclical frequency for linear agitator 3900. The shape of eccentric pin 3930, particularly the pin's diameter and its offset distance from drive axis 3932 (shown as distance x), can be changed to increase or decrease the linear agitator's ampli-

tude (range of movement). Such changes will be appreciated by those of ordinary skill in the art of machine design. Various speeds and drive amplitudes may be used with the present invention. In various embodiments, agitator comb **3904** is driven at about 1.00 to about 30.0 Hz (cycles per second), and more preferably at about 3.00 Hz to about 15.0 Hz, and most preferably at about 6.67 Hz. Also in various embodiments, the linear agitator's amplitude (as measured either by the movement of agitator comb **3904** or agitator drive bar **3912**) is about 0.125 inches to about 1.00 inches, and more preferably about 0.250 inches to about 0.750 inches, and most preferably about 0.375 inches. Gearbox **3907** may use any type of gear, such as spur gears or epicyclic gears, and may include a clutch to prevent overloading in the event the agitator drive bar **3912** becomes stuck.

It is also anticipated that drive speeds in the ultrasonic range (about 20,000+Hz), may be used with very low amplitudes to agitate the carpet and help remove dirt and debris. In this case, the entire agitator comb **3904** may be driven at ultrasonic frequencies or with ultrasonic overtones, or just parts of the agitator comb **3904** may be driven at ultrasonic frequencies or with ultrasonic overtones. When ultrasonic drive frequencies are desired, it is preferred to use an ultrasonic driver to drive the linear agitator **3900** rather than attempting to obtain such speeds from a conventional rotating drive motor. Ultrasonic drivers (or "horns") are commercially available from a number of sources, and the adaptation of such devices to drive the agitator of the present invention will be within the ordinary skill in the art in light of the present disclosure.

In the embodiment of FIGS. **39**A–D, flexible connector **3910** preferably comprises a thermoplastic elastomer or other suitable flexible material having ribs **3936** that extend from mounting rail **3908** (or housing **3901**, if mounting rail **3908** is omitted) to agitator drive bar **3912** (or agitator comb **3904**, if drive bar **3912** is omitted). Ribs **3936** form a guide structure that flexes laterally to allow lateral movement of agitator drive bar **3912** relative to housing **3901**, but limits longitudinal flexing (i.e., in the direction designated by arrow C). Ribs **3936** pivot slightly as they deform, and thus agitator drive bar **3912** will have a slight vertical movement as it cycles horizontally. In this embodiment, each rib **3936** can be described as rotating about a rotational axis at each of its ends. In the embodiment of FIG. **39**A, this axis generally corresponds to direction C, and is parallel to the surface to be cleaned and oriented perpendicular to the axis along which the agitator comb **3904** is moved. Using this construction, the movement of agitator drive bar **3912**, and hence the agitator comb **3904**, is limited to an essentially linear direction.

The dimensions of the flexible ribs **3936** can be manipulated to achieve the desirable flexibility and fatigue resistance. In one embodiment, the thickness t of each rib **3936** is about 10% of the rib's height and depth. In another embodiment, each rib **3936** has a thickness t (in direction A) of about 2 mm, a depth (in direction C) of about 32 mm, and a height (in direction B) of about 24 mm. In this embodiment, there may be six ribs **3936**, and flexible connector **3910** comprises two separate pieces that are located on opposite sides of the drive point **3926**. Also in this embodiment, the resilience of flexible connector **39810** provides a restoring force that reduces the amount of force required to change the agitator bar's and agitator comb's direction of movement, which helps reduce fatigue on drive point **3926** and eccentric pin **3930**.

Although the shown and described embodiment of the flexible connector **3910** is preferred, other embodiments are also possible. For example, flexible connector **3910** may instead comprise one or more mechanical linkages that are affixed to agitator drive bar **3912** and housing **3901** by hinges or a sliding bar. As used herein, "flexible" includes any structure that allows movement, such as pivots, slides, deformable structures, and the like. Flexible connector **3910** also may be oriented horizontally or at an angle relative to the surface to be cleaned (see, e.g., FIG. **44**D).

A unique and beneficial feature of one embodiment of the present invention is that agitator comb **3904** can be easily removed and replaced with a variety of different agitator combs that are adapted to suit different surfaces (such as bare floors, rugs of different materials and constructions, and so on). For example, various agitator combs **3904** having the construction shown in FIGS. **39**A–D (i.e., having a plurality of bristles) may be provided having different numbers of bristles **3938**, or the densities, stiffnesses and/or shapes of the bristles **3938** can be modified to provide different cleaning performance on different surfaces. Such variations are within the realm of routine experimentation. A device embodying the present invention may be provided with a kit that includes various different agitator combs **3904**, or may simply be provided with a single agitator comb **3904** having a construction that is found to work suitably well on a number of different surfaces. In a preferred embodiment, such a universal-use agitator comb **3904** may comprise about sixty-two bristle tufts having about ninety bristle strands each, wherein each strand is a 6/6 nylon strand having a diameter of about 0.008 inches and a free length of about 0.250 inches. Preferably, the tufts are arranged in a linear pattern of three rows in which a row of about twenty tufts is located between two rows of about twenty-one tufts, with the tufts of adjacent rows being offset relative to one another in the longitudinal direction. In other preferred embodiments, the bristle tufts may each comprise at least about thirty strands, and most preferably about sixty-two strands and are arranged in a pattern that provides about 3 to 8 bristle tufts per square inch, and most preferably 6 bristle tufts per square inch.

Referring to FIGS. **41**A–C, agitator comb constructions other than the bristle-brush configuration of FIGS. **39**A–D may also be used with the present invention. For example, as shown in FIG. **41**A, bristles **3938** may be replaced by a foam pad **4102**, which has been found to be useful for scrubbing bare floors. Pad **4102** also may comprise a backing surface to which disposable or reusable cleaning or polishing pads can be affixed. FIG. **41**B shows another embodiment in which agitator comb **3904** has a number of flexible elastomeric cleaning "fingers" **4104**. The cleaning fingers **4104** may have a flat profile, as viewed from the side (such as bristles **3938** are shown having in FIG. **39**C), or may have a tapered or otherwise contoured profile, as shown in FIG. **41**B. As with bristles **3938**, the thickness, length, shape, composition and other properties of the cleaning fingers **4104** may be varied to obtain improved cleaning results on various different surfaces, and may be selectively tailored to clean particular surfaces. In the embodiment of FIG. **41**C, the cleaning fingers **4104** are joined to one another by a common base **4106**, which may increase the rigidity and fatigue resistance of the cleaning fingers **4104**, and allows them to be cast as a single unit and more readily attached to the agitator comb base **3904***a* by overmolding or other well-known means. Of course, other variations of the

agitator comb **3904**, and different cleaning members, other than bristles, pads and "fingers" may be used with the invention.

While the linear agitator of the present invention may be mounted in the device housing in any suitable location, in a preferred embodiment the linear agitator is mounted as shown in FIG. **42**, which is a partially cut away side view of the front end of a wet extractor **4200**. In this embodiment, the linear agitator **3900** of FIG. **39**A–D is mounted in wet extractor **4200** as described with reference to FIGS. **39**C–D, and is driven by motor **3906** by way of gearbox **3907** and eccentric pin **3930**. Wet extractor **4200** is similar in construction to the device **10** of FIG. **1**, and has a vacuum inlet nozzle **4202** at its front end, and two or more wheels (not shown) at or near its back end. Vacuum inlet nozzle **4202** leads to a vacuum passage **4204** that eventually leads to a recovery tank **4206** and then to a vacuum source **4208**. Wet extractor **4200** also has a fluid spray nozzle **4210** (or nozzles), that is attached to a liquid management system by a hose (not shown) and positioned with its spray pattern **4212** directed behind the inlet nozzle **4202**, and in front of linear agitator **3900**. While this configuration (i.e., spray nozzle **4210** between vacuum inlet nozzle **4202** and linear agitator **3900**) is preferred, other configurations may also be used with the present invention. For example, spray nozzle **4210** may be located behind or even within linear agitator **3900**. Spray nozzle **4210** may also be replaced by a fluid drip system that allows fluid to seep onto the surface being cleaned by gravitational flow.

It is preferable that linear agitator **3900** be positioned between vacuum inlet nozzle **4202** and the wet extractor's wheels, and located vertically with respect to wet extractor **4200** in such a way that the weight of the wet extractor does not rest, at least in any large degree, upon agitator comb **3904**. This is desirable to maintain the desired "float" that prevents agitator comb **3904** from being forced into hard contact with the surface being cleaned **4216**. The agitator comb's vertical travel Y (FIG. **39**D) is also selected to allow agitator comb **3914** to conform to changing contours of surface **4216** without allowing agitator comb **3904** to run out of travel (i.e., "bottom out") on bumps. As noted before, a vertical travel distance Y of at least about 0.125 inches, and more preferably 0.250 inches, is generally sufficient during normal operation to allow agitator comb **3904** to conform to most surfaces that are cleaned using wet extractors without bottoming out or being lifted too far to contact the surface. Of course, even with these amounts of vertical travel Y, some loss of contact with the surface **4216** and bottoming out may be experienced, but these incidences generally do not degrade the overall performance of the present invention.

A grooming brush **4214** may also be provided, preferably between inlet nozzle **4202** and spray pattern **4212**. The wet extractor is operated by moving it forwards and backwards in the direction shown by reference arrow C. When wet extractor **4200** is pulled backwards (to the right in FIG. **42**) on its final cleaning stroke over a portion of the surface being cleaned, grooming brush **4214** straightens the carpet and provides a desirable uniform look thereto. In a preferred embodiment, grooming brush **4214** is affixed to wet extractor housing **4201** such that it can pivot along an axis parallel to the surface being cleaned **4216** and perpendicular to the device's normal direction of travel. (This pivot axis generally corresponds to reference arrow A in FIG. **39**A.) This pivoting movement reduces the vertical force applied to the surface **4216** while still providing suitable grooming action. In the embodiment of FIG. **42**, grooming brush **4214** has bristles **4220** that extend towards surface **4216**, and is mounted on one or more pivots **4218** to allow it to swing back and forth, as shown by reference arrow D. Bristles **4220** preferably comprise a single row of about thirty-nine bristle tufts of 6/6 nylon bristle fibers, wherein the row is about 9.75 inches long, each bristle tuft comprises about ninety bristle fibers, and each bristle fiber has a diameter of about 0.008 inches and a free length of about 0.300 inches. Also in this embodiment, bristles **4220** extend only about 0.125 inches or less below the plane defined between the lower edge of inlet nozzle **4202** and the bottoms of the wheels, to thereby limit the depth to which bristles **4220** penetrate surface **4220**.

In a preferred embodiment, grooming brush **4214** may be removed by the operator for cleaning, replacement, and use without it. Grooming brush **4214** may also be replaced by other types of brushes or other devices to accommodate the different carpets and floors that may be treated with wet extractor **4200**. For example, a squeegee may be used to replace grooming brush **4214** when wet extractor **4200** is used on tile or hardwood floors.

It should be appreciated by those of ordinary skill in the art that numerous variations on the drive system for the linear agitator are possible with the present invention, and any system that can drive agitator comb **3904** in a cyclical motion without applying a substantial vertical load to agitator comb **3904** will be suitable. Some examples of alternative drive systems are now described with reference to FIGS. **44**A–D. In the embodiment of FIG. **44**A, which is a front view, linear agitator **3900** is driven from above by a motor (not visible) through gearbox **3907**, and an offset rocker arm **4402**. Offset rocker arm **4402** is pivotally mounted on pivot **4404**, has a slot **4406** at its first end, and a driving pin **4408** at its second end. Eccentric pin **3930** fits in slot **4406**, while driving pin **4408** fits into slot **3928** in agitator drive bar **3912**. As eccentric pin **3930** rotates, it moves the first end of offset rocker arm **4402** back and forth on pivot **4404**, and offset rocker arm **4402** transfers this motion to linear agitator **3900**. In a similar embodiment, shown in FIG. **44**B, slot **4406** can be eliminated by driving the first end of offset drive bar by way of an intermediate link **4410**. In either of these embodiments, slot **3928** may also be removed and replaced by a simple pivot hole to form a ball-and-socket joint. In such an embodiment, agitator drive bar **3912** may be driven with a slight up and down movement, caused by the arcuate path of driving pin **4408**, but such movement can be effectively isolated from the surface being cleaned by providing an appropriate vertical travel Y for agitator comb **3904**.

The embodiments of FIGS. **44**A and B can be further modified by rotating the motor and gearbox to be vertical relative to the surface to be cleaned, as shown in the top view (i.e., the view along direction B in FIG. **39**A) of FIG. **44**C. In this embodiment, motor **3906** drives eccentric pin **3930** through gearbox **3907**, which in turn causes intermediate link **4410** to rock offset rocker arm **4402** back and forth. In this embodiment, slot **3928** is parallel to the surface to be cleaned, as shown in FIG. **43**B. It is also envisioned that slot **3928** may be replaced by a simple pivot or ball-and-socket joint, in which case flexible connector **3910** should be chosen to allow a limited amount of play to account for the arcuate path through which driving pin **4408** will travel as it pivots on offset rocker arm **4402**.

Still another embodiment of an alternative drive assembly is shown in FIG. **44**D. This embodiment is a modification of the embodiment of FIG. **44**C, in which mounting rail **3908** and flexible connector **3910** are positioned on the side of

agitator drive bar **3912**, rather than being on top of agitator drive bar **3912**. In this embodiment the ribs **3936** of flexible connector **3910** flex each about an axis perpendicular to the surface being cleaned (this pivot axis is into the page in FIG. **44**D, and generally corresponds with arrow B in FIG. **39**A), rather than pivoting about axes that are parallel to the surface to be cleaned. If it is desired to use a simple pivot for driving pin **4408** (rather than placing driving pin **4408** into a slot **3928**), tensile and compressive loads on flexible connector **3910** caused by the arcuate path of driving pin **4408** can be minimized by selecting the distance between pivot **4404** and driving pin **4408** to approximately equal the length of ribs **3936**. This approach may also be used when slot **3928** is omitted from the embodiments of FIGS. **44**A and B.

The linear agitator of the present invention has been found to be effective at cleaning carpets and bare floors, while also providing a number of benefits over conventional designs. For example, the linear agitator generally does not leave streaks of accumulated water on the floor, as often happens with vertically-oriented spinning brushes. Furthermore, the linear agitator can be made such that it is readily modified by a user to use different agitator combs to meet the needs of different surfaces. Also, the agitator comb can be adapted so that it "floats" on the surface being cleaned without applying significant vertical force thereto, which reduces wear on the surface. Still further, the linear agitator eliminates the need for expensive bearings, as required in "beater brush" agitators, and has been found to self-clean in operation because it doesn't tend to pick up, sling or retain dirt, string and hair, as rotating cleaners do. Other advantages and benefits of the invention are also available, as described in and evident from the discussion herein.

While the discussion herein has generally described embodiments of linear agitators that are mounted in the bases of cleaning devices, such as wet extractors, a linear agitator of the present invention can also be adapted for use in accessory cleaning tools that are used for remote and spot cleaning operations. As noted elsewhere herein, such accessory tools are useful to provide the ability to clean surfaces that are not readily accessible by the large floor-cleaning bases of cleaning devices. Similarly, the present invention can also be adapted for use in portable hand-held cleaning tools, canister-type tools, and other devices, as will be appreciated by those of ordinary skill in the art.

An embodiment of a compact, hand-held agitator assembly **4500** that is usable as an accessory tool (often called a "turbo-tool") or as part of a self-contained hand-held cleaning device is shown in FIGS. **45**A and B. In this embodiment, the agitator assembly is formed by a housing **4502** that comprises a lower housing **4502***a* that houses an agitator **4504**, and an upper housing **4502***b* that houses a vacuum inlet passage **4506** having an elongated inlet slit **4507**, a turbine drive **4508** and a gearbox **4510**. A spray nozzle **4534** is also preferably provided in agitator assembly **4500** and oriented to spray cleaning fluid on the surface to be cleaned. Spray nozzle **4534** is connected by hose **4536** to a fluid hose receptacle **4530** located adjacent a main vacuum passage **4512** formed in upper housing **4502***b*. In this embodiment, agitator assembly **4500** is operated by air drawn in by a vacuum through main vacuum passage **4512**. It will be appreciated that in other embodiments agitator **4504** may instead be powered by an electric motor or other drive device, and that spray nozzle **4534** and/or vacuum inlet **4506** may be omitted from the device.

Referring also to FIGS. **50**A–D, vacuum inlet passage **4506** passes through upper housing **4502***b* and meets a main vacuum passage **4512**. The front portion of vacuum inlet passage **4506** is preferably formed on one side by housing **4502***b*, and on the other side by a removable inlet nozzle cover **4538**. A second vacuum passage, the turbine drive passage **5004** (FIGS. **50**A–D), leads from turbine drive **4508** to main vacuum passage **4512**. While it is envisioned that both the vacuum inlet passage **4506** and the turbine drive passage **5004** may be open to main vacuum passage **4512** at all times, in which case agitator **4504** and vacuum inlet passage **4506** will operate at all times, it is preferred that a mode selector valve **4540** is provided to selectively control the vacuuming and agitating functions. Mode selector valve **4540** may be operated by a sliding switch **4541** that is retained on the top of housing **4502***b* by an additional subhousing **4502***c*. The operation of such a mode selector valve **4540** is described in more detail elsewhere herein. One or more of housings **4502***a* and **4502***b*, subhousing **4502***c* and nozzle cover **4538** may comprise a transparent material to allow operation to be monitored, obstructions to be detected, and to increase the visual appeal of the device.

Agitator assembly **4500** is preferably connectable with a handle **4501**, but handle **4501** also may be integrally formed with agitator assembly **4500** or omitted. Handle **4501** preferably comprises a rigid structure that is connected or connectable to a flexible hose **4532** that leads to the main body of the cleaning device. Handle **4501** has a hollow grip **4514** having vacuum and fluid passages therethrough. Flexible hose **4532** includes a vacuum passage and a fluid hose (not shown), which is preferably located inside the vacuum passage. A trigger **4516** is provided on handle **4501** to operate a valve (not shown) that controls the flow of fluid through the fluid passage, or with an electric switch to activate a fluid pump to send fluid to the accessory tool. A handle interface **4518** mates with a corresponding agitator assembly interface **4520** to join the two parts. Handle interface **4518** includes a vacuum passage **4526** that engages with main vacuum passage **4512**, and a fluid plug **4528** that mates with fluid hose receptacle **4530**. Handle **4501** also has a latch **4524** that engages with a hook **4522** on agitator assembly **4500** to lock the two parts together. When the parts are engaged with one another, the air and fluid passages are preferably sealed together with little, if any, appreciable leakage of vacuum or fluid.

Turbine drive **4508** is housed in upper housing **4502***b*. Turbine drive **4508** includes a vaned air turbine **4542** that is sandwiched between a separate, two-piece housing **4544***a* and **4544***b*. Housing **4544***a* has a number of openings **4546** through which air enters to activate turbine drive **4508**. When turbine drive **4508** is installed in upper agitator assembly housing **4502***b*, openings **4546** match with openings **4548** through upper housing **4502***b* to allow airflow to air turbine **4542**. As shown in FIGS. **45**A–B, air turbine **4542** is positioned between mode selector valve **4540** and agitator **4504**, and is oriented with its rotating axis **4550** generally orthogonal to the plane of the surface to be cleaned. In other embodiments, however, air turbine **4508** may be turned on its side or angled relative to this orientation, and any suitable intervening drive mechanisms (such as belts and gears) may be provided to use the air turbine's movement to drive agitator **4504** in the manner described below. The implementation of such intervening mechanisms will be understood by those of ordinary skill in the art without undue experimentation.

A gearbox **4510** is preferably provided to convert the high-speed, low-torque movement of air turbine **4542** to a lower speed and higher torque drive output. Gearbox **4510** comprises a gear case **4554** that houses a set of gears **4552** of conventional construction. Fasteners **4555** pass through

gear case **4554** and turbine housing **4544***a* and **4544***b* to retain gearbox **4510** and turbine drive **4508** in upper housing **4502***b*. Gears **4552** are driven by an air turbine axle **4556**, and the gearbox output is an eccentric pin **4558** that, like the other eccentric pins described herein, rotates at an offset distance about a drive axis **4560**. Eccentric pin **4558** exits gear case **4554** through an opening **4562** located opposite turbine drive **4508**. In a preferred embodiment, in which air turbine **4550** is a conventional design having a diameter of about 3.375 inches and a speed reduction of about 11.75:1, has been found to be suitable to drive the agitator **4504** at a useful speed and torque. Of course, other gearing variations may be used depending on the turbine efficiency and speed, the vacuum level, the desired output speed and torque, and so on, and such variations are within the scope of routine experimentation.

Eccentric pin **4558** drives a drive plate **4564**, which in turn drives an agitator comb **4566**, preferably in a manner described elsewhere herein with reference to FIGS. **46** and **47**. Agitator comb **4566** is preferably affixed to drive plate **4564** by clips **4570**, that allow agitator comb **4566** to displace towards and away from drive plate **4564** in a manner such as described with reference to agitator comb **3904** and agitator drive bar **3912** of FIGS. **39**A–D. Clips **4570** may also be hand-removable to facilitate removal and replacement of agitator comb **4566**. Agitator comb **4566** has one or more cleaning members **4568** extending therefrom in a the direction towards the intended surface to be cleaned. Cleaning members **4568** may be bristles, cleaning "fingers," sponges, foam pads, or the like, as described previously herein. In a preferred embodiment, cleaning members **4568** comprise about fourteen tufts of 6/6 nylon fibers, in which the fibers each have a diameter of about 0.008 inches and a length of about 0.500 inches. In this embodiment, the tufts are arranged in a rectangular pattern having a row of four tufts between two rows of five tufts.

Drive plate **4564** and agitator comb **4566** are contained in lower housing **4502***a*, which abuts upper housing **4502***b* when installed, and is affixed thereto by fasteners **4572** that engage with gear case **4554**. In a preferred embodiment, drive plate **4564** is physically captured within lower housing **4502***a*, but is retained in such a manner that it is free to slide along a linear direction. Agitator comb **4566** may be similarly captured within lower housing **4502***a*, but it is also envisioned that agitator comb **4566** may instead be removable without having to remove lower housing **4502***a*. In such a removable embodiment, agitator comb **4566** may be easily removed for cleaning or for replacement with other combs to suit the surface being cleaned.

The agitator comb cleaning members **4568** extend through an opening **4574** through lower housing **4502***a* to reach the surface to be cleaned. Lower housing **4502***a* may also be equipped with a number of fixed bristles **4576** that extend parallel to cleaning members **4568**. Fixed bristles **4576** are useful in one respect as additional scrubbing bristles during manual agitation. It is also envisioned that one or more rows of bristles may be provided on lower housing **4502***a* or on upper housing **4502***b* adjacent the inlet to vacuum inlet passage **4506** to act as a grooming brush. Fixed bristles **4576** support agitator assembly **4500** on the surface being cleaned to help obtain the preferred "floating" agitator comb action and prevent the operator from pressing the agitator assembly **4500** too firmly into the surface being cleaned. This aspect of the invention is described in more detail elsewhere herein. In a preferred embodiment, fixed bristles **4576** comprise about eighteen bristle tufts of 6/6 nylon bristle strands, wherein each bristle strand has a diameter of about 0.008 inches and a free length of about 0.4375 inches (7/16"). In this embodiment, fixed bristles **4576** are arranged in two rows of nine bristle tufts each, and the rows are disposed on opposite sides of agitator comb **4566**, and preferably along the sides that are parallel to the direction of the agitator comb's reciprocating movement.

A preferred agitator **4504** for use in agitator assembly **4500** is shown in more detail in FIGS. **46** and **47**. In this preferred embodiment, the clips **4570** that attach agitator comb **4566** to drive plate **4564** each comprise a displaceable hook **4570***a* and a box-like guide structure **4570***b*. Clips **4570** fit into corresponding clip openings **4602** in drive plate **4564** to thereby retain agitator comb **4566** in engagement with drive plate **4564**, while still allowing agitator comb **4566** to freely displace relative to drive plate **4564** between contracted and extended positions. The direction in which agitator comb **4566** displaces is shown by reference arrow B in FIG. **46**. When agitator comb **4566** is fully contracted, cleaning members **4568** extend from lower housing **4502***a* by a minimum distance, and when agitator comb **4566** is fully extended, cleaning members **4568** extend from lower housing **4502***a* by a maximum distance. The difference between these distances is the amount of agitator comb "float," which is designated by distance Y in FIG. **47**, in which agitator comb **4566** is shown in the contracted position, and the tips of cleaning members **4568** are shown by phantom lines as they would appear in the extended position.

Because agitator assembly **4500** is typically held in the operator's hand, rather than being affixed to a cleaning device base that is supported on the surface being cleaned, it has been found to be desirable to include fixed bristles **4576** (or other deformable support structures) on lower housing **4502***a* to help support agitator assembly **4500** and give the operator some indication of the proper height at which to operate the device relative to the surface being cleaned. As such, fixed bristles **4576** are selected to have a length that is somewhere between the minimum and maximum distances of the cleaning members, as shown in FIG. **47**, or greater than the maximum cleaning member distance. The stiffness and length of fixed bristles **4576** is preferably selected to make it somewhat difficult to compress them, during normal use, to the point where agitator comb **4566** reaches the contracted position (i.e., "bottoms out").

It is anticipated that agitator assembly **4500** may be used in various orientations, and in some orientations (e.g., upside-down) agitator comb **4566** may not be pulled towards the surface being cleaned by gravity, and may retract to the contracted position. As such, in one embodiment one or more light springs (not shown) may be positioned between agitator comb **4566** and agitator comb **4566** to apply a light force to hold agitator comb **4566** away from the contracted position. Of course, such springs may also be used with an agitator of the invention that is installed in a base housing (such as the agitator of FIGS. **39**A–D), but in those cases the use of an additional spring is not preferred.

The agitator drive plate **4564** is held by guide structures such that it is free to slide back and forth in a linear direction shown by reference arrow A in FIG. **46**, but otherwise generally restricted from translational and rotational movement. While these guide structures may comprise a flexible connector, such as flexible connector **3910** described previously herein, it is preferred that the guide structures comprise walls, pins, rollers or other surfaces in housing **4502***a* that abut corresponding surfaces on drive plate **4564**, to retain drive plate **4564** in housing **4502**. In such an embodi-

ment, drive plate **4564** may simply be captured within lower housing **4502***a* without being directly attached to the agitator assembly **4500**.

In a preferred embodiment, best shown in FIG. **47**, drive plate **4564** is captured between lower housing **4502***a* and gear case **4554**. In this embodiment, drive plate **4564** comprises a first set of walls **4606** and **4608** that slidably abut corresponding walls **4607** and **4609** of lower housing **4502***a* and gear case **4554**, respectively, to limit the drive plate's movement in the vertical direction, as shown by reference arrow B. Drive plate **4564** also has a second set of walls **4610** that slidably abut corresponding walls **4612** on gear case **4554** to limit the drive plate's lateral movement in the direction show by reference arrow C. The combined limitations on movement provided by these walls restricts drive plate **4564** to being movable generally only along direction A (FIG. **46**). Drive plate **4564** may also be provided with a guide pin recess **4614** (FIG. **46**) that receives a guide pin **4557** (FIG. **46**) that protrudes from gear case **4554**. Guide pin recess **4614** is generally slot-shaped, and extends in the direction in which drive plate **4564** is reciprocated, as shown by reference arrow. A. In order to reduce friction, slight gaps may be provided between the various surfaces described herein (as shown in FIG. **47**), and/or the surfaces may be made from a low-friction material or greased.

As noted before, agitator **4504** is driven by eccentric pin **4558** that rotates at an offset distance about drive axis **4560** (in the compact gear set shown, the eccentric pin's drive axis **4560** is coaxial with the air turbine's drive axis **4550**). Eccentric pin **4558** slidably fits into a drive slot **4604** in drive plate **4564**. Drive slot **4604** is preferably oriented such that it extends generally perpendicular to the desired drive direction. For example, drive slot **4604** extends generally in the direction shown by arrow C, which is perpendicular to the drive direction, which is shown by arrow A. As eccentric pin **4558** rotates, it alternately presses on the drive slot's side walls (the walls that extend along the slot's length) and moves drive plate **4564** in a reciprocating linear manner.

It will be appreciated that the circular rotation of eccentric pin **4558** in drive slot **4604** causes drive plate **4564** to move with a velocity profile that follows a sinusoidal pattern, with the maximum velocities being obtained when eccentric pin **4558** is at 0 degrees and 180 degrees along the longitudinal axis of drive slot **4604**, and minimum velocities being obtained when eccentric pin **4558** is at 90 degrees and 270 degrees. This velocity profile can be varied be angling drive slot **4604** relative to the drive direction or providing drive slot **4604** with non-rectangular side walls. The effects of such variations can be readily calculated using simple geometric and dynamic principles, and such variations are within the ordinary skill in the art of machine design and within the scope of the invention. These principles are also applicable to driving an agitator that is affixed within a device's base, as described with reference to agitator **3900**.

Although the shown embodiment in which eccentric pin **4558** is located in drive slot **4604** is preferred, it will be appreciated by those of ordinary skill in the art that other mechanisms (such as rocker arms, gears, linkages and the like) may be used to operate drive plate **4564** in a reciprocating motion, and such variations are within the scope of the present invention.

Referring now to FIGS. **48**A and B, in one embodiment of the invention, the agitator of the present invention may be provided as a modular device that can be selectively removed or inserted into an agitator assembly (or device housing). Such a modular system provides a number of benefits. For example, it is sometimes desirable to clean with an accessory tool without using an agitator, and in such cases, the modular agitator can be removed to reduce the weight of the accessory tool. Being removable also makes the agitator and accessory tool easier to clean, and makes it possible to provide different replaceable agitator modules that are suited for cleaning particular surfaces.

In the shown embodiment, modular agitator assembly **4800** comprises a main housing **4802** and an agitator module **4804** (which is shown in phantom in FIG. **48**B). Main housing **4802** preferably comprises a rigid structure, preferably made of plastic, having a handle portion **4818** and a cleaning head portion **4820**. A vacuum inlet **4812** leads through a vacuum inlet passage **4814** to a main vacuum passage **4816** that passes through the hollow handle **4818**. An agitator vacuum port **4815** is also provided in main housing **4802** to provide a passage from the agitator module **4804** (when it is installed) to main vacuum passage **4816**. A spray nozzle **4822** is positioned in cleaning head **4820** to project cleaning fluid onto a surface to be cleaned. Hose **4824** connects spray nozzle **4822** to a valve **4826** in handle **4818**, and a trigger **4828** is provided to control valve **4826** and the flow of fluid therethrough. A hollow, flexible hose **4830** extends from the back of handle **4818** to connect main vacuum passage **4816** to a vacuum source **4817** in the main body of the cleaning device. Flexible hose **4830** also has a fluid hose **4832** disposed therein to connect spray nozzle **4822** to a cleaning fluid source **4833**. Main housing **4802** may also be equipped with one or more fixed brushes **4834** that can be used to manually agitate or groom the surface being cleaned. Brushes **4834** may also be replaced by squeegees, sponges, foam pads, or other cleaning members or useful devices.

Agitator module **4804** is preferably shaped to fit into a corresponding cavity **4836** in main housing **4802**, but may simply be attached to a surface of main housing **4802**. Inside agitator module **4804** are an agitator and a turbine adapted to drive the agitator. The agitator and turbine may be any conventional devices, but are preferably devices as described previously herein with reference to FIGS. **45**A and B. The agitator comprises a number of cleaning members **4842** that extend from agitator module **4804** towards the surface to be cleaned. One or more turbine air inlet ports **4838** pass into agitator module **4804** to supply air to the turbine. Agitator module **4804** also has a turbine air outlet port **4840** that is positioned such that it is connected to the agitator vacuum port **4815** when agitator module **4804** is installed in main housing **4802**, thereby providing the vacuum necessary to draw air into vacuum inlet ports **4838**, and through the turbine to power the turbine and agitator. It is also anticipated that the agitator turbine may be replaced by other types of motor, such as an electric motor. In such an embodiment, the turbine air ports may be replaced by electrical contacts that lead to the electric motor, and a switch to energize the contacts may be provided on handle **4818**.

When it is desired to clean with an agitator, agitator module **4804** is inserted into main housing **4802** by sliding pins **4806** at the front of agitator module **4804** into corresponding slots **4808** in main housing **4802**, pivoting agitator module **4804** up into main housing **4802**, and moving slide lock **4810** in place to retain the back end of agitator module **4804**. As agitator module **4804** is moved up into main housing **4802**, an upper surface **4844** of agitator module **4804** presses against and opens a spring-loaded door **4846** that normally blocks the flow of air into agitator vacuum port **4815**. In this manner, the flow of air through agitator vacuum port **4815** is automatically enabled when agitator module

4804 is installed, and disabled when it is removed. Of course, other connection systems may be used to retain agitator module 4804 in main housing 4802 and to automatically or manually open the door 4846 or other closure covering agitator vacuum port 4815 (if such a closure is provided, which is not required), and the invention is not limited to the shown system.

Although it is desirable to have a connection system that automatically enables the airflow to agitator vacuum port 4816 whenever agitator module 4804 is installed, such a system is not necessary in an embodiment of the invention having a mode selector valve 4848. Mode selector valve 4848 controls the amount of air that passes into main vacuum passage 4816 from vacuum inlet passage 4814 and/or agitator vacuum port 4815. One embodiment of a mode selector valve 4848 is depicted in FIGS. 49A and B, which show mode selector valve 4848 in the agitating and vacuuming positions, respectively. Mode selector valve 4848 comprises a blocking surface 4902 that is slidably movable between a vacuuming port 4904 and an agitating port 4906. Vacuuming port 4904 is an opening between vacuum inlet passage 4814 and main vacuum passage 4816, and agitating port 4906 is an opening between agitator vacuum port 4815 and main vacuum passage 4816. As mode selector valve 4848 is moved back and forth, it blocks all or a portion of vacuuming port 4904 and/or agitating port 4906. In the shown embodiment, the length of mode selector valve 4848 is selected such that it can be positioned between vacuuming port 4904 and agitating port 4906 without blocking either, which allows simultaneous full-power vacuuming and agitating.

In FIG. 49A, the agitating position, mode selector valve 4848 is in a first operating position in which fluid communication between vacuum inlet passage 4814 and main vacuum passage 4816 is blocked, and fluid communication between agitator vacuum port 4815 and main vacuum passage 4815 is allowed. In FIG. 49B, the vacuuming position, mode selector valve 4848 is in a second operating position in which fluid communication between vacuum inlet passage 4814 and main vacuum passage 4816 is allowed, and fluid communication between agitator vacuum port 4815 and main vacuum passage 4815 is blocked. A variable mixed-mode operating position is also available between the agitating position and the vacuuming position, in which both vacuum inlet passage 4814 and agitator vacuum port 4815 are in fluid communication with main vacuum passage 4816. In this mode, the device simultaneously vacuums and agitates, and the relative strengths of these operations can be adjusted by the user, in essentially infinite relative proportions, by moving mode selector valve 4848 back and forth to restrict the vacuuming port 4904 and/or the agitating port 4906. In order to help control its operation and prevent inadvertent actuation, mode selector valve 4848 may be equipped with detents to hold it in certain positions, such as full-vacuum, full-agitate, and 50/50 vacuum and agitate.

When mode selector valve 4848 is provided on modular agitator assembly 4800, the operator can place it in the vacuuming position whenever agitator module 4804 is removed from main housing 4802 to prevent unwanted vacuum leakage through agitator vacuum port 4815. Of course, this is not required when the device has an automatic shutoff mechanism, such as spring-loaded door 4846. One advantage of not providing an automatic shutoff is that the user can adjust mode selector valve 4848 to bleed air in through agitator vacuum port 4815 when agitator module 4804 is removed, to thereby control the strength of the vacuum applied through vacuum inlet passage 4814.

In still another embodiment of the invention, agitator module 4804 may be adapted to automatically actuate mode selector valve 4848 when it is removed to move it to the vacuuming mode position and prevent airflow through agitator vacuum port 4815. For example, main housing 4802 may have a spring-actuated lever that presses mode selector valve 4848 into the vacuuming position, and agitator module 4804 may have a pin that moves this lever out of the way when agitator module 4804 is installed, thereby making it possible to move mode selector valve into the agitating position. When agitator module 4804 is removed, the pin is withdrawn and the lever is moved back into place by a spring to "lock out" the agitating position.

Mode selector valves are also beneficially used with non-modular agitator assemblies. For example, the non-modular agitator assembly 4500 of FIGS. 45A and B may incorporate a mode selector valve 4540 to regulate the relative intensities of its agitating and vacuuming functions. As shown in FIG. 45B, this embodiment of mode selector valve 4540 comprises a hollow chamber having a lower opening 4578 in its bottom surface, and a rear opening 4580 in its rearward-facing surface. An internal passage 5002 (FIGS. 50A–D) connects lower opening 4578 and rear opening 4580 to form a continuous passage through mode selector valve 4540. Mode selector valve 4540 fits into upper housing 4502*b* between vacuum inlet passage 4506 and main vacuum passage 4512, and is slideable from a forward position to a rearward position. Mode selector valve 4540 can also be placed in an essentially infinite range of positions intermediate the forward and rearward positions, or can be provided with detents to locate it in a discrete number of intermediate positions.

The operation of mode selector valve 4540 is shown in FIGS. 50A–D, with FIGS. 50A and B showing side and top views of the agitating position, and FIGS. 50C and D showing similar views of the vacuuming position. In the agitating position, mode selector valve 4540 is moved to its rearward position within upper housing 4502*b*. In this position, lower opening 4578 is oriented over an agitator vacuum port 5004 to allow air to enter turbine air openings 4548, pass through air turbine 4542 to operate it, and into main vacuum passage 4512, as shown by the arrows in FIGS. 50A and B. Also in this position, a side wall 5006 of mode selector valve 4540 is located adjacent an interior housing wall 5010 to substantially block the air path between vacuum inlet passage 4506 and main vacuum passage 4512 and prevent any appreciable vacuuming action.

In the vacuuming position, shown in FIGS. 50C and D, mode selector valve 4540 is in its forward position. In this position, side wall 5006 is moved forward away from interior housing wall 5010 to allow air to flow from inlet slit 4507, through vacuum inlet passage 4506, and into main vacuum passage 4512, as shown by the arrows. Also in this position, agitator vacuum port 5004 is no longer positioned under lower opening 4578, and is instead covered by a lower wall 5008 of mode selector valve 4540 to block airflow therethrough. Mode selector valve 4540 can also be positioned in intermediate positions to provide a blend of agitation and vacuuming, as noted previously herein.

Although the mode selector valves described with reference to FIGS. 49A–B and FIG. 50A–D both comprise slide-type valves, they throttle the airflow through their respective vacuum inlet passages and agitator vacuum ports in different manners. Specifically, mode selector valve 4848 of FIGS. 49A–B only throttles one of the passages at a time, while the other remains fully-opened. In contrast, mode selector valve 4540 of FIGS. 50A–D simultaneously opens

one passage while closing the other. This second embodiment has been found to be advantageous because it allows the device to be more compact. Mode selector valve **4848**, vacuuming port **4904** and agitating port **4906** of FIGS. **48**A–B may also be re-shaped or sized to provide simultaneous throttling of both passages, as provided by mode selector valve **4540**.

The mode selector valve **4540** of FIGS. **50**-A–D also provides the advantage of providing a convoluted path from vacuum inlet passage **4506** to agitator vacuum port **5004**, which is useful to prevent fluid recovered during the vacuuming operation from flowing or dripping into air turbine **4542** and potentially harming it. As shown in FIGS. **50**C–D, in order for water to travel from vacuum inlet passage **4506** to agitator vacuum port **5004**, the fluid would have to escape the airflow into main vacuum passage **4512**, completely reverse its direction, travel down the length of internal passage **5002**, and fall through lower opening **4578**. Furthermore, fluid that is settled on the floor of vacuum inlet passage **4506** or main vacuum passage **4512** would have to rise over the rear lip of lower wall **5008** in order to continue to agitator vacuum port **5004**.

While the mode selector valves described herein have comprised slide valve-type structures, it is also envisioned that embodiments of the present invention may have different types of mode selector valves, and any type of valve that blocks airflow can be used. For example, the mode selector valve may comprise a rotary valve that draws air through a rotatable tube. The tube is fitted into a hole having a vacuum inlet passage and an agitator vacuum passage located at different locations about the hole's circumference, and the tube can be rotated through various positions about its circumference to receive air from either or both of the vacuum inlet passage and the agitator vacuum port. In another embodiment, the mode selector valve may comprise a simple damper door that can be pivoted to obstruct the air flow from either the vacuum inlet passage or the agitator vacuum port. In addition, in another embodiment of the invention, the mode selector valve may be bifurcated into two separate and individually-operable valves that each control one of the vacuum inlet passage and the agitator vacuum port. Other variations will be readily apparent to those of ordinary skill in the art.

Still another aspect of the present invention is a unique surface cleaning tool that can be attached to the vacuum inlet nozzle of a wet extractor or other cleaning device to provide improved cleaning performance on particular surfaces. In general terms, the surface cleaning tool of the present invention comprises a main body that is selectively positioned adjacent an elongated inlet nozzle or slit of a cleaning device. A forward inlet extends along the inlet nozzle and provides a first passage through the main body into the inlet nozzle, and a rearward inlet extends along the inlet nozzle and provides a second passage to the inlet nozzle. A wiper is attached to the main body and extends along the inlet nozzle. The wiper is positioned between the first inlet and the second inlet, and can move into positions where it blocks either the forward or rearward inlet. As the device is moved on a floor or other surface being cleaned, the wiper moves to block the inlet located opposite the direction of movement. For example, when the cleaning device is moved forward, the wiper moves backwards (relative to the rest of the device) and covers the rearward inlet, and vice versa. This applies the vacuum provided from the vacuum inlet nozzle in front of the wiper (with respect to the device's direction of travel), regardless of whether the device is moved forward or backward. The present invention is particularly suited for cleaning bare surfaces, such as tile and hardwood floors, windows, linoleum, countertops and the like, but may also be used on other surfaces.

Referring now to FIGS. **51**A–B, an embodiment of a surface cleaning tool of the present invention is described in detail. Surface cleaning tool **5100** comprises a main body **5102** and a wiper **5104**. Main body **5102** may either be integrally formed with the cleaning device to which tool **5100** is attached, or may be separately formed and equipped with means to attach and detach it from the cleaning tool. Main body **5120** is elongated to fit over all or most of a cleaning device's elongated vacuum inlet nozzle. In the shown embodiment, main body **5102** comprises a molded detachable piece made of hard plastic or another rigid material, that fits over the inlet nozzle **5106** (FIG. **51**B) of a cleaning device. Main body **5102** preferably has rear clips **5108** that wrap around a rear ledge **5110** of inlet nozzle **5106**, and front clips **5112** that wrap around a front ledge **5114** of inlet nozzle **5106**. Tool **5100** preferably is installed by hooking rear clips **5108** over rear ledge **5110** and pressing upwards until front clips **5112** snap into engagement with front ledge **5114**. A finger grip **5116** is provided to assist the user with removing front clips **5112** to remove surface cleaning tool **5100**.

Inlet nozzle **5106** eventually leads to a vacuum source that draws air up through main body **5102**. Although the present invention may be used with any type of cleaning device, it is preferably used with a wet extractor, and in this embodiment, inlet nozzle **5106** leads to the vacuum source by way of a recovery tank, as described elsewhere herein, that is adapted to remove debris and water entrained in the air. Inlet nozzle **5106** is positionable proximal to the surface that is desired to be cleaned, and may either be part of a cleaning device's lower housing, such as a housing that is adapted to be moved across a floor, or part of an accessory cleaning tool or portable device that is intended to clean raised or remote surfaces and surfaces that are inaccessible to large floor cleaning devices.

In the embodiment of FIGS. **51**A–B, wiper **5104** comprises first and second wiper blades **5104***a* and **5104***b* that are arranged parallel to one another, and preferably formed of opposite parts of the same folded piece of material. Wiper **5104** may be attached to main body **5102** in any manner that is suitable with the objectives described herein. Preferably, wiper **5104** is retained by folding wiper **5104** over a pin **5118**, and pressing the wiper and pin into a series of slots **5120** in main body **5102**. By using a slight interference fit, pin **5118** and wiper **5104** lodge firmly into slots **5120**. One or more plugs **5122** may also be snap-fitted, glued or otherwise attached to main body **5102** to hold pin **5118** and wiper **5104** in slots **5120**. Wiper **5104** is oriented to extend along the length of, and generally below, the cleaning device's elongated inlet nozzle **5106** when floor cleaning device **5100** is installed.

Wiper **5104** may comprise any resilient flexible material, and preferably comprises a natural or synthetic rubber or polymeric compound having good durability and chemical stability. When used with wet extractors that apply a chemical solution to the surface being cleaned, wiper **5104** should be made from a material that resists chemical attack by any anticipated cleaning solutions.

Wiper **5104** extends through an opening **5124** through the bottom of main body **5102**, and effectively divides the open space within main body **5102** into a forward inlet **5126** and a rearward inlet **5128**. The lengths of the wiper blades **5104***a*

and **5104***b* are selected such that they contact the surface being cleaned **5130** when main body **5102** is placed on surface **5130**.

During use, surface cleaning tool **5100** and the device to which it is attached are moved in a back-and-forth motion, generally along reference arrow A of FIG. **51**B. As tool **5100** is moved forward (to the left in FIG. **51**B), friction contact with surface **5130** causes first and second wiper blades **5104***a* and **5104***b* to drag behind to a first position in which one or both of wiper blades **5104***a* and **5104***b* blocks or obstructs rearward inlet **5128**. This position is shown in FIG. **51**B. When moved rearward (to the right in FIG. **51**B), wiper blades **5104***a* and **5104***b* move to a second position in which one or both of them blocks forward inlet **5126**. The rigidity and lengths of wiper blades **5104***a* and **5104***b* can be readily tailored to provide the desired back-and-forth pivoting in response to friction forces with the surface **5130**. Although the use of friction to move wiper blades **5104***a* and **5104***b* to their first and second positions is preferred, it is also envisioned that other means, such as a mechanical linkage, may be used to actuate wiper **5104** between the first and second positions, and such means may be controlled manually or by an automated system-that senses the direction of the device's movement.

The direction-sensitive vacuum-blocking wiper **5104** of the present invention provides distinct advantages over conventional designs that use separate wipers located on opposite sides of the inlet nozzle. For example, the single, central wiper performs the water-capturing "squeegee" function in both directions of travel, and selectively applies the vacuum to whichever inlet is located above the operating side of the wiper to recover the accumulated fluid and debris. Consequently the vacuum is always applied in the proper location relative to the movement of the device. As such, it is unnecessary to provide two separate wipers, and it is further unnecessary to modify the wipers, as required in the prior art, to allow them to pass fluid when going in one direction, while capturing fluid when going in the other direction.

Of course, various other embodiments of the invention are possible. For example, floor cleaning device **5100** (or inlet nozzle **5106**, or the device to which inlet nozzle **5106** is connected) may be equipped with wheels **5132** (shown in phantom) that hold opening **5124** a predetermined distance above the surface being cleaned **5130**. Wheels **5132** also may be placed on user-adjustable mounts so that the user can change the predetermined height of opening **5124** to tailor the cleaning performance to particular surfaces. When wheels **5132** are not provided, the height of opening **5124** may be dictated by the overall geometries and shape of the cleaning device to which surface cleaning tool **5100** is attached, or surface cleaning tool **5100** may have extended skids **5134** at either end upon which it rests to hold opening **5124** above the surface **5130**. Skids **5134** are shown here as the lower edge of plugs **5122**, but may be made integrally with other parts of the device.

Another embodiment, shown in FIG. **52**, comprises a wiper **5200** having a number of slots **5202** and **5204**. Wiper **5200** is similar to wiper **5104** of FIG. **51**A–B in that it comprises parallel first and second blades **5200***a* and **5200***b*, which may be folded halves of the same piece of material. A first set of slots **5202** are made in first wiper blade **5200***a*, and a second set of slots **5204** are made in second wiper blade **5200***b*. Slots **5202** and **5204** provide additional flexibility to wiper **5200**, which allows wiper **5200** to conform to irregular surfaces, particularly when wiper blades **5200***a* and **5200***b* are made of a relatively rigid material. The sets of slots **5202** and **5204** preferably are offset relative to one another to prevent fluid and vacuum air from escaping past the wiper blades **5200***a* and **5200***b*, but may alternatively be aligned relative to one another to increase the flexibility of wiper **5200**.

In still other embodiments, the type and number of wipers and the manner in which the wipers operate can be varied. Five exemplary alternative embodiments are now described with reference to FIGS. **53**–**57**.

In the surface cleaning tool **5300** of FIG. **53**, the flexible ribbon-type wiper blades **5104***a* and **5104***b* are replaced by a single pivoting wiper **5302**. Pivoting wiper **5302** is shown in a neutral position in FIG. **53**, and is adapted to pivot about a pivot point **5301** in the directions shown by arrow B. Pivoting wiper **5302** has a first side **5304** that abuts a corresponding first wall **5306** in rearward inlet **5308** to block or impede airflow therethrough when pivoting wiper **5302** is in the first position (i.e., when the device is being moved forward), and a second side **5310** that abuts a corresponding second wall **5312** in forward inlet **5314** to block or impede airflow therethrough when pivoting wiper **5302** is in the second position (i.e., when the device is being moved backward). In operation, surface cleaning tool **5300** operates in substantially the same manner as surface cleaning tool **5100**.

While the pivoting wiper **5302** of surface cleaning tool **5300** is shown having a single blade, it is also envisioned that such a wiper may also be constructed with multiple conjoined blades. For example, the surface cleaning tool **5400** of FIG. **54** has a single pivoting wiper **5402** having a plurality of radially-extending conjoined wiper blades **5404**. Such multiple blades **5404** may provide improved containment and wiping of fluids. This embodiment is substantially the same as the embodiment of FIG. **53** in all other respects.

In still another embodiment, shown in FIG. **55**, the present invention may comprise two or more separate wipers. In this embodiment, surface cleaning tool **5500** has parallel but separately-formed and separately-pivoting first and second wipers **5502** and **5504**. First wiper **5502** pivots about a first pivot **5506** in the directions shown by arrow C, and second wiper **5504** pivots about a second pivot **5508** in the directions shown by arrow D. Each of these wipers **5502** and **5504** may comprise a single blade, as shown in FIG. **53**, or multiple blades, as shown in FIG. **54**. In this embodiment, first wiper **5502** has a side **5510** that abuts a corresponding wall **5512** to block airflow through the rearward inlet **5514** when the device is moved forwards, and second wiper **5502** has a side **5516** that abuts a corresponding wall **5518** to block airflow through the forward inlet **5520** when the device is moved backwards.

While the embodiments provided heretofore have described the wiper as pivoting within the main body of the surface cleaning tool, it is also envisioned that other types of wiper movement may be successfully employed with the present invention. For example, the surface cleaning tool **5600** of FIG. **56** comprises a wiper **5602** that slides within the device. In this embodiment, wiper **5602** comprises one or more blades **5604** that extend from a slide body **5606**. Slide body **5606** is retained on a track **5608** in main body **5610**, and is free to slide in the directions shown by reference arrow E. Track **5608** may be formed, for example, by inserting slide body **5606** into an opening in main body **5610** and inserting pins **5609** through main body **5610** to capture slide body **5606** and simultaneously form the lower side of track **5608**. During operation, friction contact between blade **5604** and the surface being cleaned causes slide body **5602** to slide and block either the forward inlet

5612 (when the device is moved backward), or the rearward inlet 5614 (when the device is moved forward).

Referring now to FIG. 57, in yet another embodiment, the surface cleaning tool 5700 may comprise multiple separate wipers 5704, 5706 and 5708 that are disposed end-to-end relative to one another within the main body 5702. The remainder of this embodiment is substantially the same as floor cleaning tool 5100 of FIGS. 51A–B. Such separate wipers also may be configured to overlap one another as well.

Referring now to FIG. 58, still another feature of the present invention is a unique lower housing construction for a cleaning device. The lower housing generally comprises a number of shells and covers, each of which may be formed as a separate, single piece, or as an agglomeration of separate pieces. The shells and covers fit together to retain or capture the various working parts of the device, as will now be described.

Lower shell 5804 comprises, at its back end, wheels 5810, a motor opening 5812, and handle supports 5814. Wheels 5810 support the back end of the device, as described elsewhere herein. The handle supports 5814 are shaped to receive pivoting bushings 5816 on the lower part of a handle assembly 5818, which may be a handle as described elsewhere herein or a conventional handle. Motor opening 5812 is shaped to receive a portion of a motor/fan assembly 5820, shown in FIG. 58 as comprising a fan 5822 and an electric motor 5824. Fan 5822 may comprise any suction, or pressure-producing device, and motor 5824 may be of any type. Motor 5824 and fan 5822 are attached to one another in a working sense at least to the extent that motor 5824 drives fan 5822 to produce a working air flow, such as through a drive shaft or gearbox, and may also be attached to one another physically to allow them to be handled as a single unit. Preferably, motor opening 5812 is large enough to receive motor 5824 at the point where it is connected to fan 5822, such that motor 5824 is located below the surface of lower shell 5804, and fan 5822 is located above lower shell 5804. A sealing and/or vibration reducing gasket (not shown) preferably is positioned between fan 5822 and lower shell 5804 to prevent air leakage and reduce noise emissions from the device.

The forward end of lower shell 5804 comprises a pair of laterally juxtaposed pockets 5826 with a hollow central rib 5828 positioned therebetween. At the front of lower shell 5804 is an inverted pocket 5830 for receiving an agitator assembly (not shown) and having one or more nozzle mounts 5832 for mounting fluid spray nozzles, as described previously herein. An opening 5834 may be provided to view the interior of inverted pocket 5830. A fluid pump 5836 and agitator drive 5838 are located in the underside of lower shell 5804 in the hollow central rib 5828 thereof. These parts are captured in place by a lower cover 5808, which fits over the bottom of lower shell 5804. Also captured between lower shell 5804 and lower cover 5808 is a mixing manifold 5840, which extends from the central rib 5828 into one of the pockets 5826, where a portion of the mixing manifold 5840 is exposed to receive a fluid supply tank valve assembly (not shown). The mixing manifold 5840, agitator drive 5838 and pump 5836 may be as described previously herein or of other design. Lower cover 5808 also comprises a motor shroud 5842, which at least partially surrounds motor 5824 when installed to contain and direct the flow of cooling air that passes over motor 5824 out vents 5844 to help cool the device. While the foregoing parts (and any other parts described herein) are described as being captured in place, it will be understood that the parts may alternatively or additionally be held by fasteners, adhesives, or otherwise held in place.

An upper shell 5802 is provided, preferably as a single piece, to cover the upper surface of lower shell 5804. At the back, upper shell 5802 comprises a shroud that fits over fan 5822 to control the flow of air into and out of the fan. Shroud 5846 generally comprises a flat, cylindrical chamber that surrounds the peripheral edge of fan 5822, which is where air exits fan 5822. This chamber cooperates with a corresponding surface of lower shell 5804 to form an air passage that directs air exiting fan 5822 downward through a vent (not shown) through the bottom of lower shell 5804. Shroud 5846 also comprises an inlet opening 5848 through which air can be sucked into the central opening of fan 5822. The forward end of upper shell 5802 comprises a pair of laterally juxtaposed pockets 5850 that surround an upper hollow central rib 5852. Pockets 5850 fit into the corresponding pockets 5826 when the upper and lower shells are assembled. Pockets 5850 are preferably formed to receive supply and recovery tanks, as described previously herein, and do not have bottom walls, so that the supply and recovery tanks rest directly on the lower shell 5804.

Upper shell 5802 also has formed thereon a nozzle conduit 5854, which, in conjunction with a nozzle cover 5856, forms an inlet nozzle that extends from an inlet slit at the surface being cleaned, to a recovery tank located in one of the pockets 5850. A pair of seals 5858 are provided to help seal the junction between nozzle cover 5856 and nozzle conduit 5854, and tabs 5857 are provided to hold nozzle cover 5856 in place. The construction and operation of nozzle cover 5856 and nozzle conduit 5854 are described in greater detail below. A portion of nozzle conduit 5854 may comprise a window 5860, which is located adjacent opening 5834 when assembled, through which the interior of agitator chamber 5830 can be viewed.

Upper shell 5802 and lower shell 5804 are assembled together to capture fan 5822 and a liquid management assembly 5862 between the shells. Liquid management assembly 5862 fits within upper hollow central rib 5852, and preferably is constructed in accordance with the teachings herein to allow the overall size of hollow central rib 5852 to be reduced.

An upper cover 5806 is provided to cover the rear portion of upper shell 5802, capture the handle assembly 5818 in place, and provide a location for a detergent bottle, if desired (not shown). The rear portion of upper cover 5806 comprises a curved surface that forms an upper bearing retainer 5864 for both handle bushings 5816. While bearing retainer 5864 is shown as a single continuous surface, it may also be divided into separate bearing retaining surfaces. At its front, upper cover 5806 comprises, on one side, a vacuum passage 5866, which is adapted to receive the air outlet of a recovery tank, such as those described elsewhere herein. Upper cover 5806 is formed such that it provides a closed fluid passage between vacuum passage 5866 and inlet opening 5848 through upper shell 5802, and one or more seals (not shown) may be provided at the junction between upper cover 5806 and upper shell 5802 to seal this passage. Upper cover 5806 may also be provided with a pocket 5868 that is adapted to receive a detergent bottle (not shown). Such a pocket may alternatively be provided in upper shell 5802 or elsewhere. When pocket 5868 is provided in upper cover 5806, the assembly may further comprise a detergent flow valve assembly 5870, such as those described elsewhere herein, that is captured in place between upper cover 5806 and either upper shell 5802 or lower shell 5804.

The lower housing of FIG. **58** further comprises a lower handle housing **5872** that is adapted to fit over upper cover **5806**. Lower handle housing **5872** may also be made integrally with upper cover **5806**. Lower handle housing **5872** comprises a grip portion **5874** at its top, a set of access ports **5876** at its front, and a first access port cover retainer **5878**. When installed, access ports **5876** are positioned rearward of nozzle cover **5856** to form a portion of the vacuum conduit between the inlet slit and the recovery tank, and above upper shell **5802** adjacent the liquid management assembly **5862**. This location allows an accessory tool plug to be inserted into the device to simultaneously divert vacuum to the accessory tool and actuate various features of the liquid management assembly **5862**.

An upper handle housing **5880** is provided to slide over lower handle housing **5872** to form the upper portion of a handle that can be used to lift the device. Upper handle housing **5880** also includes a second access port cover retainer **5882** that, when assembled, cooperates with first access port cover retainer **5878** to pivotally capture an access port cover **5884** in place at its hinge **5886**. Access port cover **5884** can thus be pivoted to cover or uncover the access ports **5876**.

The lower housing also includes a rear cover **5888**. This part fits over the rear portion of the lower housing to provide a cosmetically pleasing surface. The rear cover **5888** also comprises a pair of horizontally juxtaposed electrical cord retainers **5890**. The electrical cord retainers **5890** each comprise a post having a cantilevered arm at the end, which are adapted to receive and hold a wound electrical cord (not shown). Preferably, the cantilevered arm of at least one of the electrical cord retainers **5890** is adapted to pivot about the axis of the post to facilitate the removal of the wound electrical cord.

The various parts of the lower housing of FIG. **58** may be assembled using any type of fastening devices, such as screws, friction fits, adhesives, ultrasonic bonds, and the like.

The present invention also addresses a common inconvenience relating to wet extractors, which is that it is often difficult or impossible to access the interior of the inlet nozzle, which is typically a narrow slit, for routine cleaning and obstruction removal. In some previously known wet extractors, the inlet nozzle is fabricated either as a monolithic piece that can not be opened, in which case cleaning can only be accomplished by using pipe cleaners and other narrow implements. In other known extractors, the inlet nozzle comprises a nozzle cover, which forms half of the nozzle passage, that may be removed by unfastening screws or other fasteners using tools. While such extractors are more readily cleaned than those with monolithic inlet nozzles, it is not uncommon for the threaded fastener holes in the device to become stripped or broken after repeated cleanings. Users also must keep tools at the ready to in case the inlet nozzle becomes clogged during use. The present invention addresses these problems by providing an improved nozzle cover removal system that allows quick and simple access to the interior of the inlet nozzle for cleaning. An embodiment of this feature will now be described with reference to FIGS. **59**A and B.

FIGS. **59**A and B depict an embodiment of a nozzle assembly of the present invention shown on an exemplary wet extractor **5900** having a base housing **5902** and an upright handle **5904** (shown partially removed). Base housing **5902** is supported on wheels **5912**, and carries a supply tank **5906**, a recovery tank **5908** and a detergent tank **5910**, as well as various other features of the extractor **5900**. While it is preferred that wet extractor **5900** and its various constituent parts be constructed according to the teachings herein, this is not necessary for the nozzle cover assembly of the present invention. Indeed, the nozzle cover assembly of the present invention may be used with any type of wet extractor having an inlet nozzle, regardless of the type of extractor (hand-held, canister, upright, etc.) or specific layout or composition of the extractor's components.

The nozzle cover assembly generally comprises a nozzle cover **5914**, a nozzle conduit **5916**, and one or more mounting tabs **5918**. As shown in FIG. **59**A, when nozzle cover **5914** is in place, it forms one half of an enclosed passage that extends from a slit-like inlet opening adjacent the surface being cleaned to the inlet of recovery tank **5908**. When nozzle cover **5914** is removed, as shown in FIG. **59**B, the enclosed passage is opened to reveal nozzle conduit **5916**. When so removed, nozzle conduit **5916** and nozzle cover **5914** can be easily cleaned without resorting to pipe cleaners or other special tools.

When attached, nozzle cover **5914** is held in place at the front by tabs **5918**, which slide over and engage flanges **5920** that are integrally formed with and laterally extend from either side of the front of nozzle cover **5914**. Alternatively, tabs **5918** may simply slide over portions of the nozzle cover **5914** itself (i.e. extending flanges are not required). Tabs **5918** can be made in any suitable manner, but are preferably formed, as shown in FIG. **59**C, as folded-over members that have one arm **5932** captured in an elongated sliding passage **5934** located between upper and lower housing shells **5936**, **5938**, and a free arm **5940** that acts as the tab to hold the flanges **5920** in place. The sliding passage **5934** may also include detents or bumps that hold tabs **5918** in certain positions (such as opened and closed positions). The back of nozzle cover **5914** is held in place by being captured within and opening **5922** that leads to recovery tank **5908**. To facilitate this attachment, the back of nozzle cover **5914** is provided with a lip **5924** that hooks into an upper edge **5926** of opening **5922**.

Referring now also to FIGS. **60**A–C, one or more seals may also be provided to help seal nozzle cover **5914** to nozzle conduit **5916** to form an airtight passage between the inlet slit and recovery tank **5908**. First seals **5928** are provided along the lower corner of each side of nozzle conduit **5916**. These are engaged by the edges of a skirt **5930** that extends downward from nozzle cover **5914**. This seal engagement is shown in FIG. **60**A. The skirts **5930** add bending stiffness to nozzle cover **5914**, which helps maintain a good seal along the entire length of nozzle cover. A second seal **6000** is provided under upper edge **5926** of opening **5922**, as shown in FIGS. **60**B and C. Second seal **6000** engages lip **5924** on nozzle cover **5914** to provide an airtight seal along the joined surfaces. The seals may be formed in any suitable manner, such as from separate pieces of flexible, airtight material (like closed-cell foam or rubber), by overmolding a soft flexible material directly to the extractor housing in the appropriate locations, or by any number of other means.

As shown in FIGS. **60**B and C, nozzle cover **5914** is preferably installed by inserting lip **5924** into opening **5922**, as shown in FIG. **60**B, then pivoting nozzle cover **5914** downward until it seals against the first and second seals. At this time, tabs **5918** are slid down to capture flanges **5920** in place, thereby securely holding nozzle cover **5914** to lower housing **5902**.

The above configuration can be varied in numerous ways without leaving the scope of the invention. For example, in one variation, shown in FIGS. **61**A and B, instead of placing

the back of the nozzle cover into the housing, pivoting it downward, and holding it in place with tabs at the front (as described above), the nozzle cover is pivotally mounted to the front of the housing, and held in place by a sliding tab at the back. In this embodiment, nozzle cover **6102** comprises a set of mounting pins **6104** at the front thereof. These pins **6104** fit into corresponding mounts **6106** near the front of extractor **6100**. Mounts **6106** are preferably shaped to allow pins **6104** to be removed so that nozzle cover **6102** can be fully removed to ease cleaning. Nozzle cover **6102** (or the extractor housing) is provided with a sliding clasp **6108** that fits over corresponding protrusions **6110** on the housing near the end of the nozzle conduit **6112**. The remainder of the nozzle assembly is otherwise the same as the nozzle assembly described above. In this embodiment, the nozzle cover **6102** is installed by inserting pins **6104** into mounts **6106**, pivoting nozzle assembly **6102** backwards and down until sliding clasp **6108** is adjacent protrusions **6110** (at which point nozzle cover is pressed firmly in place over nozzle conduit **6112**), then moving sliding clasp **6108** rearward, as shown by the reference arrow in FIG. **61**B, to hold the assembly in place.

Both of the foregoing embodiments of nozzle cover assemblies provide a quick and simple system for cleaning the inlet nozzle for wet extractors, and overcomes numerous deficiencies of the prior art. While the foregoing embodiments are preferred, other variations within the scope of the invention will be readily apparent to those of skill in the art based on the teachings herein, and with experience derived from practicing the invention.

Still another feature of the present invention is an improved inlet nozzle slit construction that provides improved performance over conventional designs. Conventional inlet slits for wet extractors comprise an elongated slit formed between two a generally flat lips of material (typically plastic). A typical prior art configuration is shown in FIG. **62**, which shows a cross sectional view of an extractor inlet nozzle **6200** formed by a forward lip **6202** and a rearward lip **6204**. It has been found that these flat lips tend to grip certain surfaces, such as carpets having short, stiff fibers, when aligned at certain angles relative to the carpet grain. When such gripping occurs, the lip resists movement and causes a chattering or vibrating effect as the extractor is moved. This chattering is unpleasant to hear and feel, and may reduce cleaning effectiveness.

The present invention reduces the incidence of inlet nozzle chatter by providing a series of protrusions along the leading edge of the forward nozzle lip. Referring now to FIGS. **63** and **64**, an embodiment of the present invention comprises an extractor nozzle inlet **6300** formed between a forward lip **6302** and a rearward lip **6304**. The leading edge (i.e., the edge pointed in the forward direction of travel) of the forward lip **6302** is provided with a series of protrusions **6306**. Each protrusion **6306** comprises a short rib that extends in the extractor's direction of travel. In the embodiment of FIG. **63**, the forward lip **6302** is formed at the bottom edge of a removable nozzle cover **6308**, such as those described previously herein, and rearward lip **6304** is formed in the base housing **6310** of the extractor. While the protrusions **6306** may take shape, it has been found that providing the protrusions with a rounded front edge **6312** improves the chatter resistance of the inlet nozzle.

Without being limited to any theory of operation, it is believed that the chatter experienced by conventional extractors occurs when one or both of the nozzle lips becomes aligned parallel with the grain of the carpet fibers, at which point the lip is located between adjacent rows of fibers. When this occurs, the lip receives less support from the carpet fibers and tends to drop down between them and become lodged there such that it resists further forward or rearward movement. As such, it is further believed that protrusions **6306** improve chatter resistance of the nozzle by deforming the rows of carpet fibers ahead of the nozzle inlet **6300** out of their normal linear shape. By doing so, the protrusions help prevent the nozzle lips from ever being positioned entirely or primarily between adjacent fiber rows.

As shown in FIGS. **64**A and **64**B, it is preferred for the protrusions **6306** to be provided in a pattern having multiple sets of protrusions **6402**. The protrusions **6306** of each set **6402** gradually increase in size towards the center of the set, and decrease towards the ends. As shown in the side view of FIG. **64**B, the largest protrusions **6404** at the center of each set **6402** extend further forward than the smaller protrusions **6406** at the ends of each set **6403**. It is believed that providing protrusions **6306** of various sizes in this manner further helps to prevent the nozzle lips from being captured between adjacent linear rows of carpet fibers.

While the foregoing embodiment is preferred, it is envisioned that various modifications can be made to the design without leaving the scope of the invention. For example, the protrusions of just one size may be used, and they may be arranged in different patterns. Furthermore, the protrusions may be located on the rear nozzle lip of the nozzle inlet, rather than the forward nozzle lip. The protrusions also may extend downward below the plane of either the front or rear nozzle lip, or may be positioned to extend partially or fully into the nozzle inlet itself. Other variations will be apparent to those of ordinary skill in the art in view of the teachings herein.

While the present invention has been described and illustrated herein with reference to various preferred embodiments it should be understood that these embodiments are exemplary only, and other embodiments will be apparent to those of ordinary skill in the art in light of the teachings provided herein. Furthermore, to the extent that the features of the claims are subject to manufacturing variances or variations caused by practical considerations, it will be understood that the present claims are intended to cover such claims. It will also be understood that while the present disclosure identifies and discusses numerous different inventions in relation to the preferred embodiments, the inventions recited in the following claims are not intended to be limited to being used in conjunction with any other inventions described herein unless specifically recited as having such limitations.

We claim:

1. A wet extraction cleaning device comprising:

a base assembly adapted to move on a surface to be cleaned, the base assembly comprising an inlet nozzle forming a fluid communication path between an inlet slit and a nozzle outlet, the inlet slit being located on the base assembly proximal to the surface to be cleaned;

an operation handle pivotally attached to base assembly, and having a pivot axis about which the operation handle pivots relative to the base assembly;

a supply tank adapted to hold cleaning fluid and having a supply tank outlet;

a recovery tank adapted to hold recovered fluid, and having a recovery tank inlet and a recovery tank outlet;

a fluid deposition assembly in selective fluid communication with the supply tank outlet and adapted to convey fluid from the supply tank to the surface to be cleaned;

a vacuum source having a vacuum source inlet;

a first externally facing pocket;

a second externally facing pocket;

wherein the supply tank is adapted to be selectively received in the first externally facing pocket to place the supply tank in fluid communication with the fluid deposition assembly, and the recovery tank is adapted to be selectively received in the second externally facing pocket to place the recovery tank inlet in fluid communication with the nozzle outlet and the recovery tank outlet in fluid communication with the vacuum source inlet; and

wherein the first externally facing pocket and the second externally facing pocket are located in the base assembly.

2. The wet extraction cleaning device of claim **1**, wherein the first externally facing pocket is adapted to receive the supply tank and thereby prevent longitudinal or lateral translation of the supply tank relative to the base assembly when received therein.

3. The wet extraction cleaning device of claim **2**, wherein the supply tank is slidably receivable in a substantially vertical direction into the first externally facing pocket.

4. The wet extraction cleaning device of claim **1**, wherein the second externally facing pocket is adapted to receive the recovery tank to thereby prevent longitudinal or lateral translation of the recovery tank relative to the base assembly when received therein.

5. The wet extraction cleaning device of claim **4**, wherein the recovery tank is slidably receivable in a substantially vertical direction into the second externally facing pocket.

6. The wet extraction cleaning device of claim **1**, wherein the first externally facing pocket and the second externally facing pocket are positioned between the inlet nozzle and the pivot axis.

7. The wet extraction cleaning device of claim **1**, wherein the base assembly further comprises a third externally facing pocket and the wet extraction cleaning device further comprises a detergent tank adapted to be selectively received in the third externally facing pocket.

8. The wet extraction cleaning device of claim **7**, wherein the supply tank, the recovery tank and the detergent tank are individually removable.

9. The wet extraction cleaning device of claim **1**, wherein the base assembly comprises a lower housing and an upper housing and the supply tank and the recovery tank protrude from the lower housing.

10. The wet extraction cleaning device of claim **9**, wherein the upper housing comprises a vertical rib positioned between the supply tank and the recovery tank.

11. The wet extraction cleaning device of claim **1**, further comprising a handle lock adapted to selectively hold the operation handle in an upright resting position, and wherein the supply tank and the recovery tank are selectively removable when the operation handle is in the upright resting position.

12. The wet extraction cleaning device of claim **1**, wherein the first externally facing pocket and second externally facing pocket are laterally juxtaposed with one another relative to a longitudinal axis of the base assembly.

13. A wet extraction cleaning device comprising:

a base assembly adapted to move on a surface to be cleaned, the base assembly comprising an inlet nozzle forming a fluid communication path between an inlet slit and a nozzle outlet, the inlet slit being located on the base assembly proximal to the surface to be cleaned;

an operation handle pivotally attached to base assembly, and having a pivot axis about which the operation handle pivots relative to the base assembly;

a supply tank adapted to hold cleaning fluid and having a supply tank outlet;

a recovery tank adapted to hold recovered fluid, and having a recovery tank inlet and a recovery tank outlet;

a fluid deposition assembly in selective fluid communication with the supply tank outlet and adapted to convey fluid from the supply tank to the surface to be cleaned;

a vacuum source having a vacuum source inlet;

a first externally facing pocket;

a second externally facing pocket;

wherein the supply tank is adapted to be selectively received in the first externally facing pocket to place the supply tank in fluid communication with the fluid deposition assembly, and the recovery tank is adapted to be selectively received in the second externally facing pocket to place the recovery tank inlet in fluid communication with the nozzle outlet and the recovery tank outlet in fluid communication with the vacuum source inlet; and

wherein the inlet nozzle comprises a selectively removable nozzle cover attachable and removable without the use of tools.

14. A wet extraction cleaning device comprising:

a base assembly adapted to move on a surface to be cleaned, the base assembly comprising an inlet nozzle forming a fluid communication path between an inlet slit and a nozzle outlet, the inlet slit being located on the base assembly proximal to the surface to be cleaned;

an operation handle pivotally attached to base assembly, and having a pivot axis about which the operation handle pivots relative to the base assembly;

a supply tank adapted to hold cleaning fluid and having a supply tank outlet;

a recovery tank adapted to hold recovered fluid, and having a recovery tank inlet and a recovery tank outlet;

a fluid deposition assembly in selective fluid communication with the supply tank outlet and adapted to convey fluid from the supply tank to the surface to be cleaned;

a vacuum source having a vacuum source inlet;

a first externally facing pocket;

a second externally facing pocket;

wherein the supply tank is adapted to be selectively received in the first externally facing pocket to place the supply tank in fluid communication with the fluid deposition assembly, and the recovery tank is adapted to be selectively received in the second externally facing pocket to place the recovery tank inlet in fluid communication with the nozzle outlet and the recovery tank outlet in fluid communication with the vacuum source inlet; and

wherein the operation handle comprises a collapsible handle having an upper handle portion and a lower handle portion;

the wet extraction cleaning device further comprises a handle lock adapted to selectively hold the lower handle portion in an upright resting position; and

the supply tank and the recovery tank are selectively removable when the lower handle portion is in the upright resting position.

15. A wet extraction cleaning device comprising:

a base assembly adapted to move on a surface to be cleaned, the base assembly comprising an inlet nozzle

forming a fluid communication path between an inlet slit and a nozzle outlet, the inlet slit being located on the base assembly proximal to the surface to be cleaned;

an operation handle pivotally attached to base assembly, and having a pivot axis about which the operation handle pivots relative to the base assembly;

a supply tank adapted to hold cleaning fluid and having a supply tank outlet;

a recovery tank adapted to hold recovered fluid, and having a recovery tank inlet and a recovery tank outlet;

a fluid deposition assembly in selective fluid communication with the supply tank outlet and adapted to convey fluid from the supply tank to the surface to be cleaned;

a vacuum source having a vacuum source inlet;

a first externally facing pocket;

a second externally facing pocket;

wherein the supply tank is adapted to be selectively received in the first externally facing pocket to place the supply tank in fluid communication with the fluid deposition assembly, and the recovery tank is adapted to be selectively received in the second externally facing pocket to place the recovery tank inlet in fluid communication with the nozzle outlet and the recovery tank outlet in fluid communication with the vacuum source inlet; and

wherein the operation handle comprises a collapsible handle having an upper handle portion and a lower handle portion, the lower handle portion being pivotally attached to the base assembly, and the upper handle portion being pivotally attached to the lower handle portion.

16. A wet extraction cleaning device comprising:

a base assembly adapted to move on a surface to be cleaned, the base assembly comprising an inlet nozzle forming a fluid communication path between an inlet slit and a nozzle outlet, the inlet slit being located on the base assembly proximal to the surface to be cleaned;

an operation handle pivotally attached to base assembly, and having a pivot axis about which the operation handle pivots relative to the base assembly;

a supply tank adapted to hold cleaning fluid and having a supply tank outlet;

a recovery tank adapted to hold recovered fluid, and having a recovery tank inlet and a recovery tank outlet;

a fluid deposition assembly in selective fluid communication with the supply tank outlet and adapted to convey fluid from the supply tank to the surface to be cleaned;

a vacuum source having a vacuum source inlet;

a first externally facing pocket;

a second externally facing pocket;

wherein the supply tank is adapted to be selectively received in the first externally facing pocket to place the supply tank in fluid communication with the fluid deposition assembly, and the recovery tank is adapted to be selectively received in the second externally facing pocket to place the recovery tank inlet in fluid communication with the nozzle outlet and the recovery tank outlet in fluid communication with the vacuum source inlet; and

wherein the first externally facing pocket and second externally facing pocket are arranged on opposite sides of a longitudinal centerline of the wet extraction cleaning device.

17. A wet extraction cleaning device comprising:

a base assembly adapted to move on a surface to be cleaned, the base assembly comprising an inlet nozzle forming a fluid communication path between an inlet slit and a nozzle outlet, the inlet slit being located on the base assembly proximal to the surface to be cleaned;

an operation handle pivotally attached to base assembly, and having a pivot axis about which the operation handle pivots relative to the base assembly;

a supply tank adapted to hold cleaning fluid and having a supply tank outlet;

a recovery tank adapted to hold recovered fluid, and having a recovery tank inlet and a recovery tank outlet;

a fluid deposition assembly in selective fluid communication with the supply tank outlet and adapted to convey fluid from the supply tank to the surface to be cleaned;

a vacuum source having a vacuum source inlet;

a first externally facing pocket;

a second externally facing pocket;

wherein the supply tank is adapted to be selectively received in the first externally facing pocket to place the supply tank in fluid communication with the fluid deposition assembly, and the recovery tank is adapted to be selectively received in the second externally facing pocket to place the recovery tank inlet in fluid communication with the nozzle outlet and the recovery tank outlet in fluid communication with the vacuum source inlet; and

wherein the first externally facing pocket and second externally facing pocket are laterally juxtaposed with one another relative to a longitudinal axis of the base assembly.

18. A wet extraction cleaning device comprising:

a base assembly adapted to move on a surface to be cleaned, the base assembly comprising:

a fluid deposition assembly in fluid communication with a supply tank and adapted to convey fluid from the supply tank to a surface to be cleaned;

an inlet nozzle providing a fluid communication path between a recovery tank and an inlet slit, the inlet slit being located on the base assembly proximal to the surface to be cleaned;

a first externally facing pocket;

a second externally facing pocket; and

an operation handle pivotally attached to base assembly, and having a pivot axis about which the operation handle pivots relative to the base assembly;

wherein the supply tank is adapted to be selectively received in the first externally facing pocket, the recovery tank is adapted to be selectively received in the second externally facing pocket, and the supply tank and the recovery tank are laterally juxtaposed with one another relative to a longitudinal axis of the base assembly.

19. The wet extraction cleaning device of claim **18**, wherein the base assembly further comprises a carry handle.

20. The wet extraction cleaning device of claim **18**, wherein the base assembly further comprises a vertical rib positioned between the supply tank and the recovery tank.

21. The wet extraction cleaning device of claim **20**, wherein the base assembly further comprises a carry handle positioned on or adjacent the vertical rib.

22. The wet extraction cleaning device of claim 20, wherein the fluid deposition assembly comprises a valve assembly fluidly connected to one or more spray nozzles, and wherein the valve assembly is located within the vertical rib.

23. The wet extraction cleaning device of claim 20, wherein the inlet nozzle is at least partially positioned on top of the vertical rib.

24. The wet extraction cleaning device of claim 23, wherein the base assembly further comprises an accessory tool attachment port located on the vertical rib and in fluid communication between the inlet nozzle and the recovery tank.

* * * * *